

1 / RP2040 + FLASH + BOOT + RESET





DECOUPLING: individual IOVDD / USB / ADC / DVDD pins; VREG 1uF input + output






2 / USB DAUGHTERBOARD + 3V3 POWER


DB1: EXTERNAL C5-JSH assumed: CC 5.1k x2 / TPD4E05U06 ESD / PTC / SMF6.0A TVS.

J1: 1=protected USB power 2=D- 3=D+ 4=GND: 1:1 cable. Main-board F1 retained.

Shield joins GND on DB1. No active sustained-overvoltage disconnect. Mechanical fit provisional.

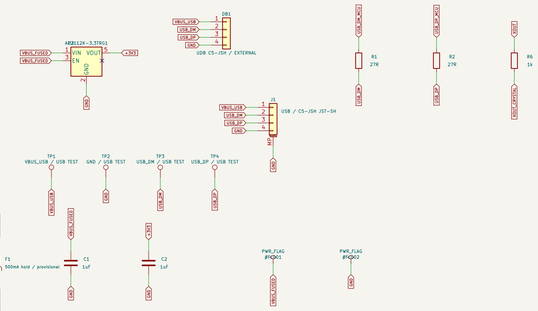


3 / CLOCK + SENSOR MCU-SIDE ONLY



No module connector or 5V sensor connection. Verify revision and level translation before connection.

4 / 5 ROW x 15 COLUMN MATRIX: COL -> switch -> diode ANODE -> CATHODE -> ROW (COL2ROW)

62 keys: legacy Keycult63 references. Bottom M1/M2: 1.5u each. Central reservation is NOT A HOLE.

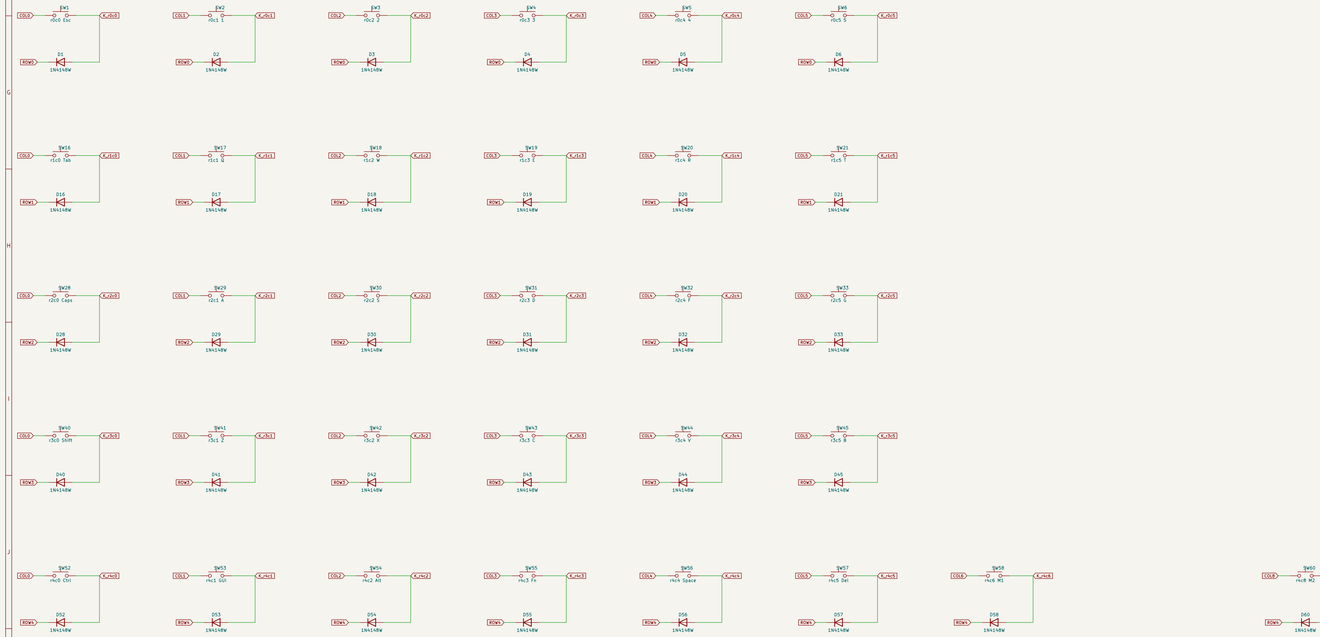

C5-JSH / 7628 STACKUP ASSUMED — NOT FOR FABRICATION

Sheet: /		
File: keycult63.kicad_sch		
Title: Keycult63 / electrical review draft		
Size: A1	Date: 2026-10-30	**Rev: DRAFT-E**
KiCad E.D.A. 10.0.7		Id: 1/1