
1 / RP2040 + FLASH + BOOT + RESET




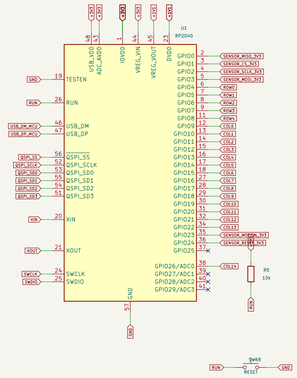


DECOUPLING: individual IOVDD / USB / ADC / DVDD pins: VREG 1uF input + output


2 / USB DAUGHTERBOARD + 3V3 POWER

J1: UDB 1=VBUS 2=D- 3=D+ 4=GND; 1:1 cable. Owned daughterboard revision. CC/ESD and cable fit unverified.

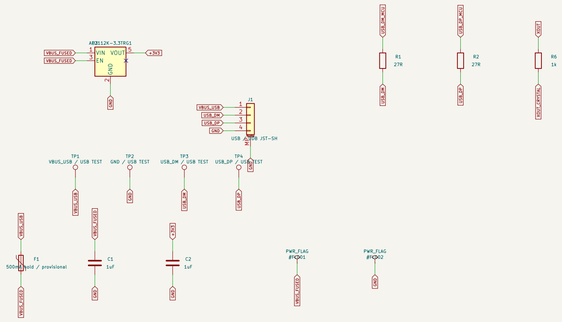

3 / CLOCK + SENSOR MCU-SIDE ONLY




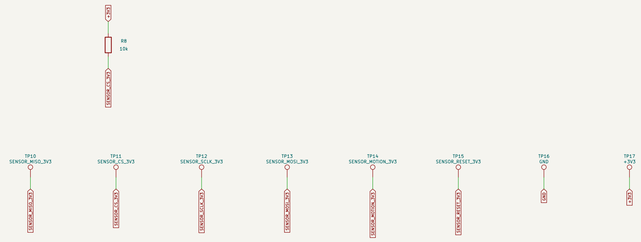

No module connector or 5V sensor connection. Verify revision and level translation before connection.

4 / 5 ROW x 15 COLUMN MATRIX: COL -> switch -> diode ANODE -> CATHODE -> ROW (COL2ROW)

63 keys; stable references from preferred.keys. Central reservation is NOT A HOLE.

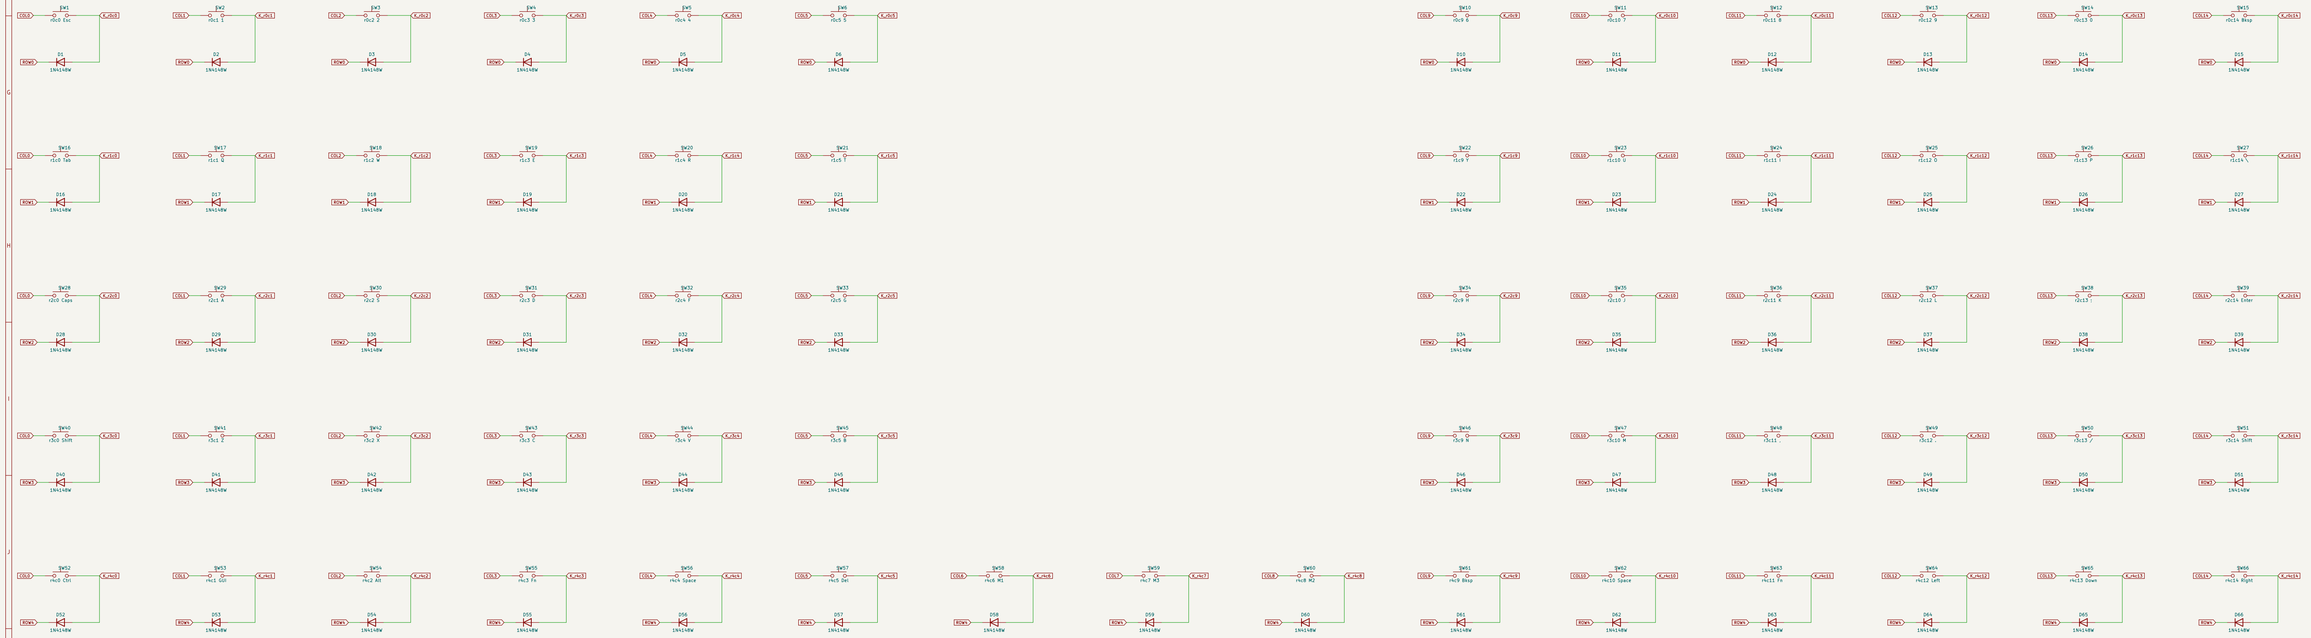

NOT FOR FABRICATION — sensor and physical cable fit provisional

Sheet: /
File: keycult63.kicad_sch

Title: Keycult63 / electrical review draft

Size: A1	Date: 2026-10-29	**Rev: DRAFT-C**
KiCad E.D.A. 10.0.7		Id: 1/1