

1 / RP2040 + FLASH + BOOT + RESET



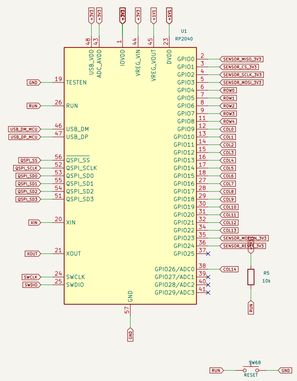



2 / USB DAUGHTERBOARD + 3V3 POWER

J1: UDB 1=VBUS 2=D- 3=D+ 4=GND: 1:1 cable. Owned daughterboard revision. CC/ESD and cable fit unverified.



3 / CLOCK + SENSOR MCU-SIDE ONLY



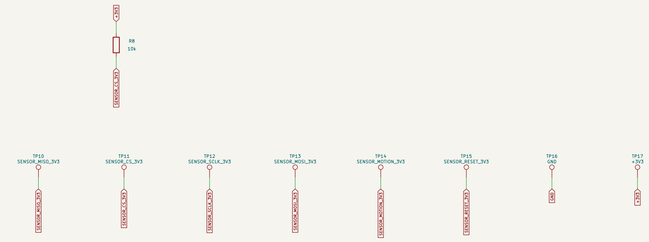

No module connector or 5V sensor connection. Verify revision and level translation before connection.


DECOUPLING: individual IOVDD / USB / ADC / DVDD pins; VREG 1uF input + output





4 / 5 ROW x 15 COLUMN MATRIX: COL -> switch -> diode ANODE -> CATHODE -> ROW (COL2ROW)

66 keys; stable references from preferred.keys. Central reservation is NOT A HOLE.

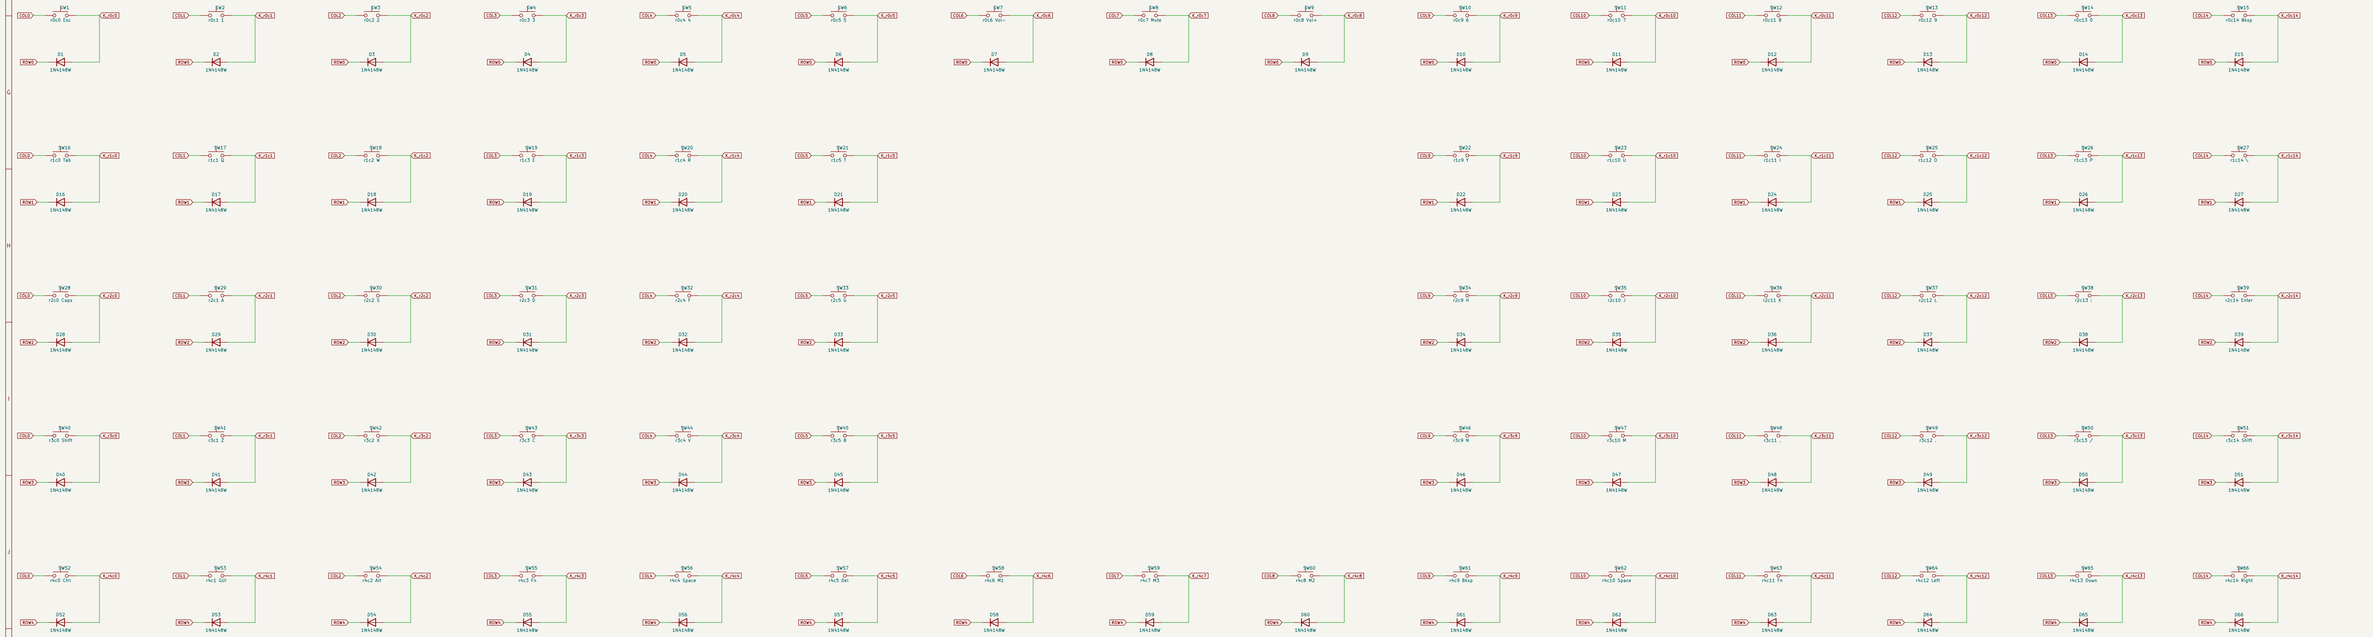

NOT FOR FABRICATION — sensor and physical cable fit provisional

Sheets: /		
File: keycult66.kicad_sch		
Title: Keycult66 / electrical review draft		
Size: A1	Date: 2026-10-29	**Rev: DRAFT-C**
KiCad E.D.A. 10.0.7		Id: 1/1