
1 / RP2040 + FLASH + BOOT + RESET



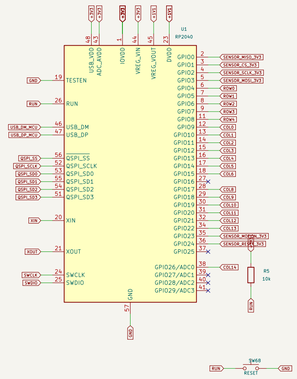


DECOUPLING: individual IOVDD / USB / ADC / DVDD pins; VREG 1uF input + output

2 / USB DAUGHTERBOARD + 3V3 POWER


DB1: EXTERNAL C5-JSH assumed: CC 5.1k x2 / TPD4E05U06 ESD / PTC / SMF6.0A TVS.


J1: 1=protected USB power 2=D- 3=D+ 4=GND: 1:1 cable. Main-board F1 retained.

Shield joins GND on DB1. No active sustained-overvoltage disconnect. Mechanical fit provisional.

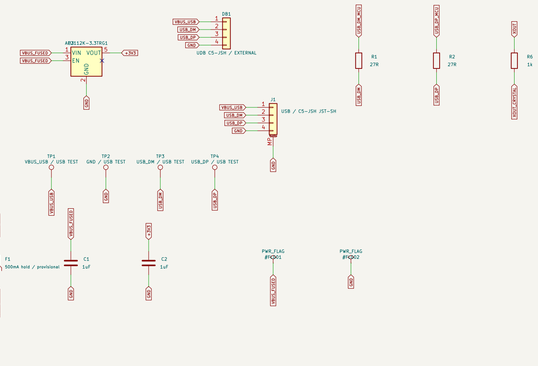

3 / CLOCK + SENSOR 3V3 CABLE INTERFACE








J2: 3V3 ONLY. Published Keyball46 circuit assumed; module identity/current/timing NOT qualified.

4 / 5 ROW x 15 COLUMN MATRIX: COL -> switch -> diode ANODE -> CATHODE -> ROW (COL2ROW)

62 keys: Keycult62. Bottom M1/M2: 1.5u each. 48x48 R1 opening: horizontal PMW3360 module below ball: fit UNVERIFIED.

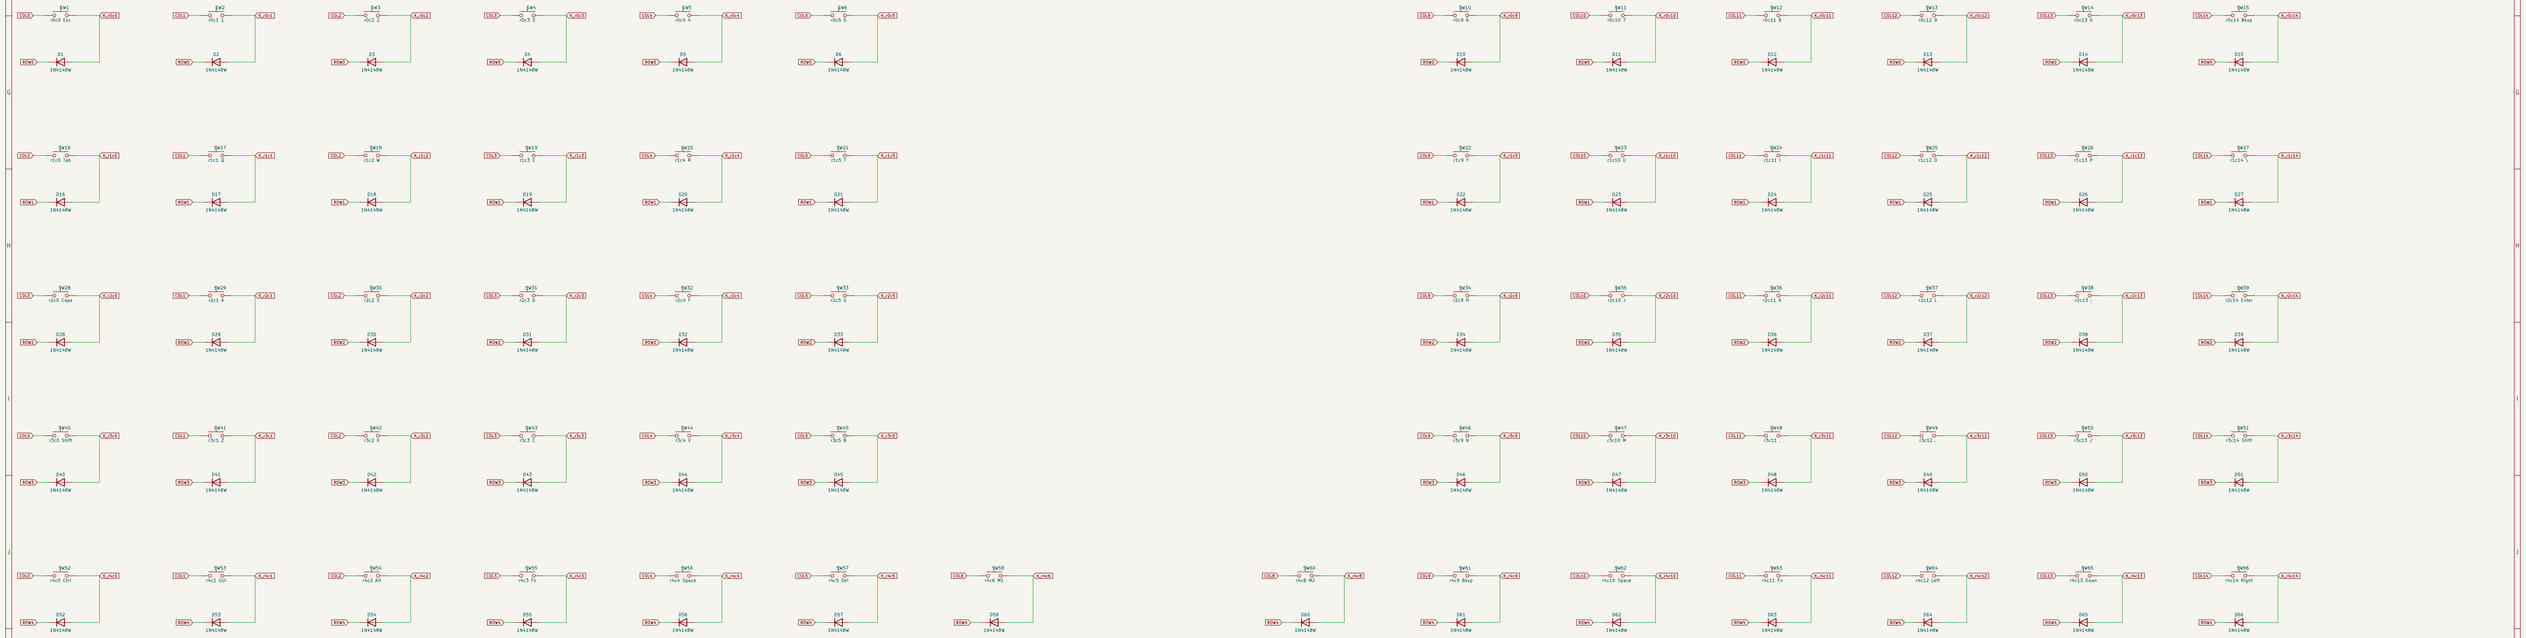

C5-JSH / 7628 STACKUP ASSUMED — NOT FOR FABRICATION

Sheets: /
File: keycult62.kicad_sch

Title: Keycult62 / electrical review draft

Size: A1 | Date: 2026-10-30 | **Rev: DRAFT-H**
KiCad E.D.A. 10.0.7 | Id: 1/1