Whole-wall heat peaks on the fixed divertor designs

7 eligible equilibria at 1400 ms · 1 MW outboard-midplane input · matched 2 mm wall rings

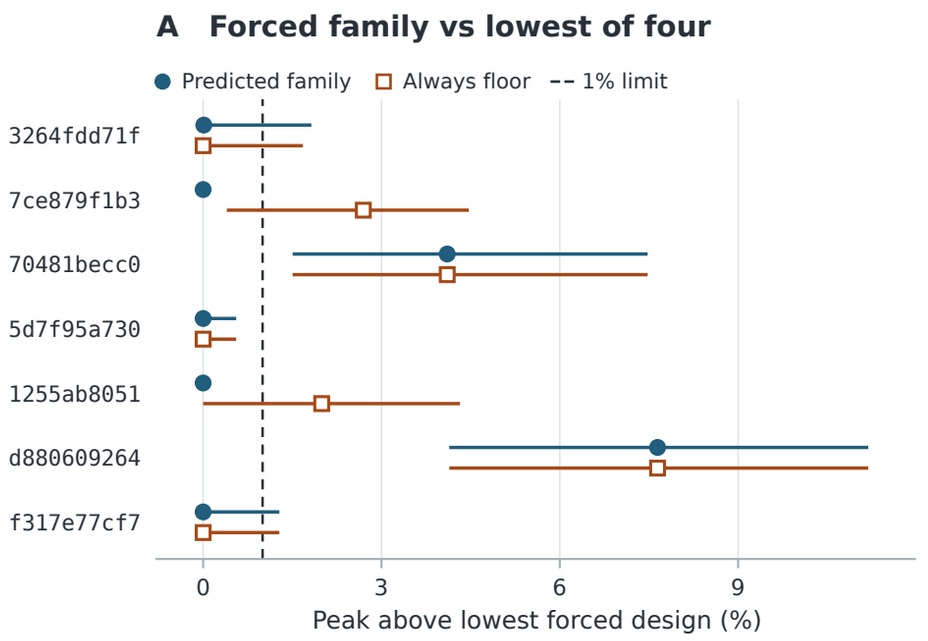

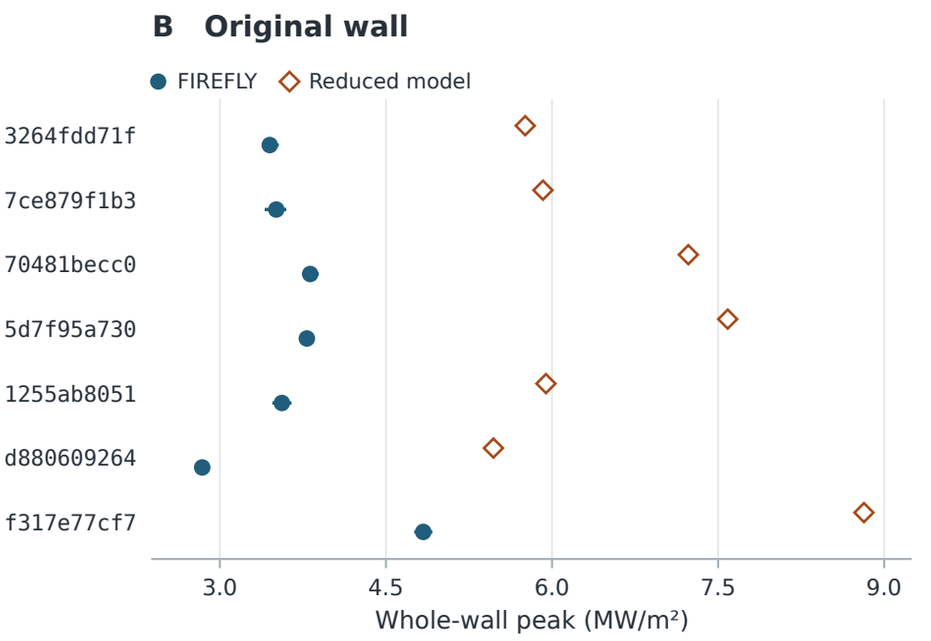

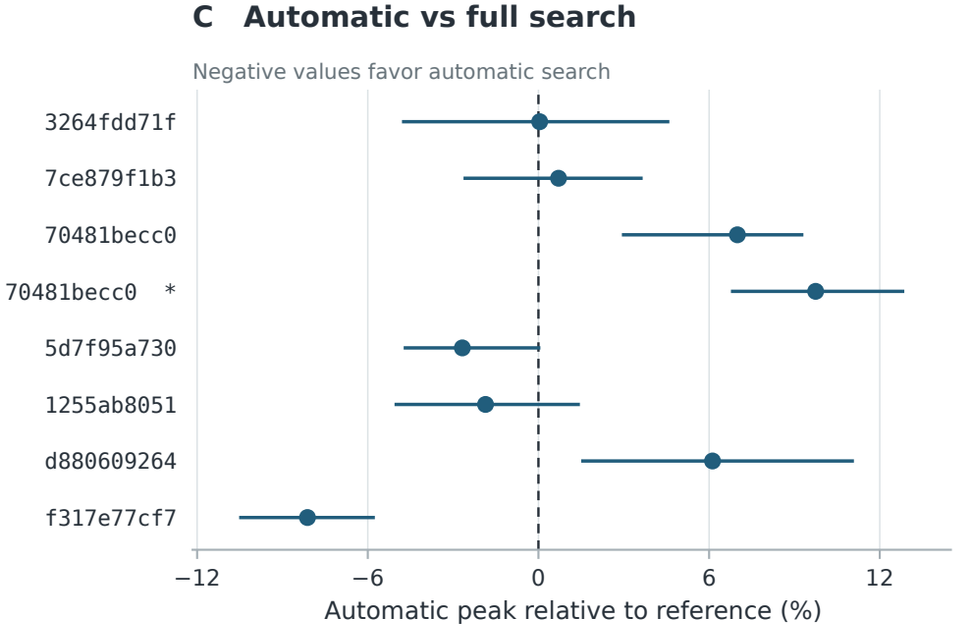

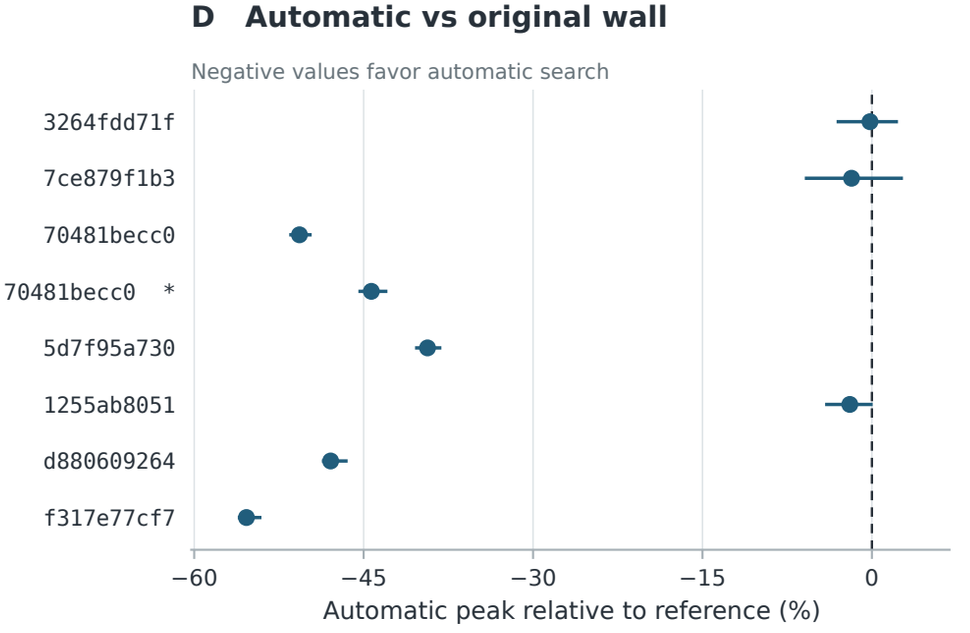

Points show pooled peak estimates. Bars show 95% paired seed-bootstrap intervals. * Extra automatic/full pair from optimizer seed 30757. Other designs use seed 30713.