



Aircraft Production Technology

STUDY CASE 1 (LAB work 1)

Contents

1 Aircraft Part Study	1
1.1 Part Location	1
1.2 Level Analysis	1
1.2.1 Part level	1
1.2.2 Node level	4
1.2.3 Panel level	4
1.2.4 Section level	5
1.2.5 Compartment level	5
1.2.6 Unit level	6
2 Electronic Part Study	7
2.1 Part Location	7
2.2 Level Analysis	7
2.2.1 Part level	7
2.2.2 Node level	9
2.2.3 Panel level	9
2.2.4 Section level	10
2.2.5 Compartment level	10
2.2.6 Unit level	11

1 Aircraft Part Study

In this part, the tire of the landing gear on a Boeing 737 will be studied.

1.1 Part Location

The tire of the landing gear is located on each of the aircraft's main landing gear assemblies. The main landing gear is located underneath the wings and consists of two assemblies, one on each side of the fuselage. The tire is mounted on a wheel, which is part of the landing gear strut assembly. Fig. (1) and (2) show the location of the tire (pointed by the red arrow) on the main landing gear and the location of the main landing gear (enclosed by the yellow ellipses) on a B737.

1.2 Level Analysis

1.2.1 Part level

Location: The landing gear tire is located at the bottom of the landing gear assembly on the aircraft. The tire is mounted on a wheel rim, which is then bolted onto the landing gear axle.

From Fig. (3), the position of the tire (the only part that is white in the figure) can be found.

Interconnected Part List:



Figure 1: The location of the tire on the main landing gear



Figure 2: The location of the main landing gear on a B737

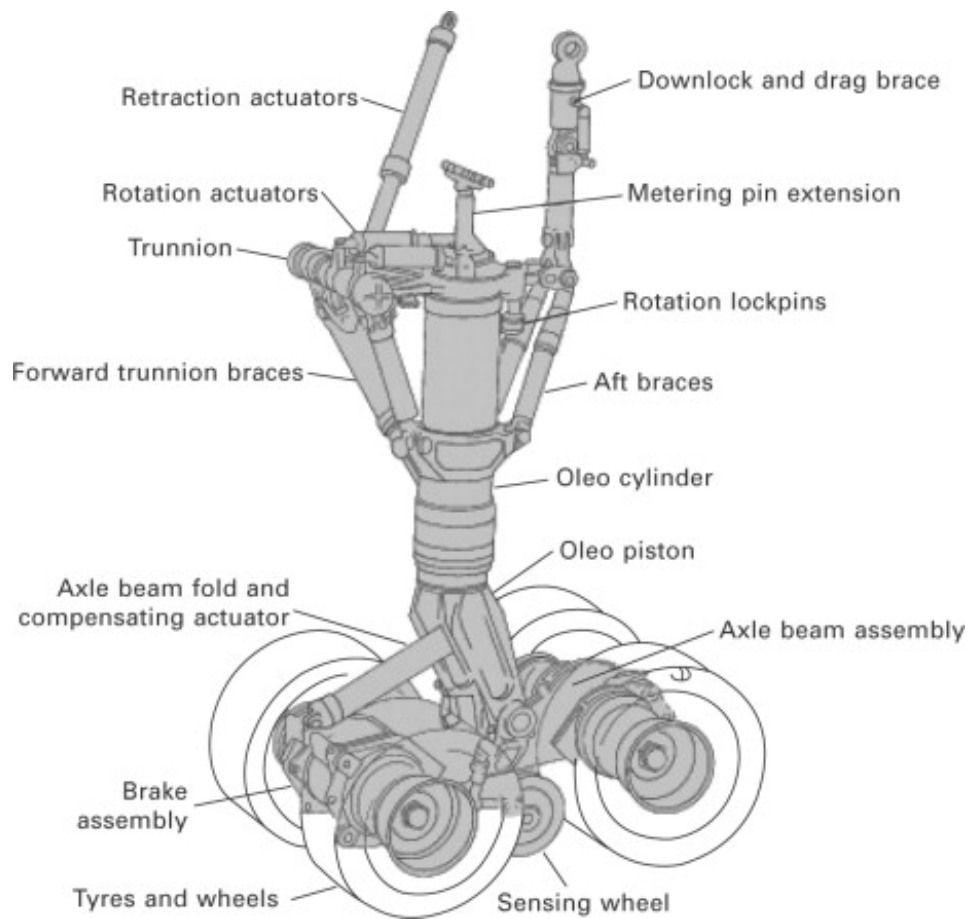


Figure 3: Detail drawing

- **Rubber Compound:** The tire is made of synthetic rubber compounds that are designed to provide durability, flexibility, and resistance to wear and tear.
- **Steel Bead Bundle:** This is a bundle of steel wires that are embedded into the rubber to provide the tire with stability and strength.
- **Belt Package:** A layer of fabric or steel cords is wrapped around the steel bead bundle to distribute the weight of the aircraft evenly across the tire.
- **Tread:** The tread is the outermost layer of the tire that comes into contact with the runway surface. It is designed to provide good traction and grip on the runway, and is made of a special rubber compound that is resistant to wear and tear.
- **Sidewall:** The sidewall is the part of the tire that connects the tread to the bead bundle, and provides lateral stability to the tire. It is also made of a rubber compound that is designed to withstand the stresses and strains of landing and takeoff.
- **Valve Stem:** The valve stem is a small component that is located on the sidewall of the tire, and allows air to be added or removed from the tire as needed. It is typically made of metal, and is attached to the tire through a small hole in the sidewall.

The main purpose of the landing gear tire as a part is to support the weight of the aircraft during landing and takeoff, and to absorb the shocks and vibrations that are generated during these phases of flight.

1.2.2 Node level

Node: Landing Gear Assembly

Location: The landing gear assembly is located on the bottom of the aircraft fuselage and consists of several components, including the landing gear strut, wheel assembly, and tire. The landing gear strut attaches to the fuselage and supports the weight of the aircraft during landing and takeoff. The wheel assembly is attached to the strut and includes the tire, wheel rim, brakes, and other components.

In Fig. (3), the interconnect parts are marked.

Interconnected Part List:

- **Landing Gear Strut:** The landing gear strut is the primary component of the landing gear assembly and provides support and stability to the aircraft during landing and takeoff. It is typically made of steel or aluminum and includes hydraulic systems for deploying and retracting the landing gear.
- **Wheel Assembly:** The wheel assembly includes the landing gear tire, wheel rim, brakes, and other components. The wheel rim is typically made of aluminum and provides a mounting point for the tire. The brakes are used to slow down the aircraft during landing and are typically hydraulic or pneumatic.

At the level of the node, the main purpose of the landing gear tire as part of the landing gear assembly is to support the weight of the aircraft during landing and takeoff, absorb shocks and vibrations, and provide traction and stability on the runway.

1.2.3 Panel level

Panel: Landing Gear Wheel Panel

Location: The landing gear wheel panel is located on the bottom of the aircraft fuselage and covers the wheel assembly and landing gear strut. It is typically made of lightweight composite materials and

is designed to provide aerodynamic efficiency while protecting the landing gear assembly from debris and other hazards.

Interconnected Part List:

- Hydraulic Systems: The landing gear assembly includes hydraulic systems for deploying and retracting the landing gear and controlling the brakes. The hydraulic systems are typically located within the landing gear strut and wheel assembly.

The main purpose of the landing gear wheel panel is to provide aerodynamic efficiency and protect the landing gear assembly from debris and other hazards during flight. The panel is designed to be lightweight and streamlined, which helps to reduce drag and improve the overall performance of the aircraft.

1.2.4 Section level

Section: Landing Gear Wheel Section

Location: The landing gear wheel section is located on the bottom of the aircraft fuselage and includes the landing gear wheel panel, landing gear strut, and other components. It is responsible for supporting the weight of the aircraft during landing and takeoff and providing a stable platform for the aircraft during ground operations.

Interconnected Part List:

- Wheel Axle: The wheel axle is a critical component of the landing gear wheel section, as it connects the wheel assembly to the landing gear strut. It is responsible for transmitting the weight of the aircraft to the landing gear strut and providing stability during ground operations.
- Braking System: The braking system is an interconnected part of the landing gear wheel section that includes the brake disc, brake caliper, and other components. It is responsible for controlling the speed and direction of the aircraft during landing and taxiing.

The main purpose of the landing gear wheel section is to support the weight of the aircraft during landing and takeoff and provide a stable platform for the aircraft during ground operations. The landing gear strut is the primary load-bearing component, while the wheel axle transmits the weight of the aircraft to the landing gear strut.

1.2.5 Compartment level

Compartment: Landing Gear Compartment

Location: The landing gear compartment is located on the underside of the aircraft fuselage, typically towards the front of the aircraft. It houses the landing gear assembly, including the landing gear tire, and provides a protective enclosure for the landing gear assembly.

Interconnected Part List:

- Wheel Well: The wheel well is an integral part of the landing gear compartment and is designed to protect the landing gear assembly from debris and other hazards. It also provides structural support to the landing gear assembly and helps to distribute the weight of the aircraft during landing and takeoff.
- Electrical System: The electrical system is another interconnected part of the landing gear compartment and includes the landing gear control panel, wiring harness, and other components. It is responsible for controlling the operation of the landing gear assembly, including the landing gear tire.

The main purpose of the landing gear compartment is to provide a protective enclosure for the landing gear assembly, including the landing gear tire. The landing gear strut and wheel well provide support and stability to the aircraft during landing and takeoff, while the hydraulic and electrical systems control the operation of the landing gear assembly.

1.2.6 Unit level

Unit: Landing Gear System

Location: The landing gear system is located on the underside of the aircraft and includes the main landing gear, nose landing gear, and associated components such as the tires, wheels, and brakes, as shown in Fig. (4).

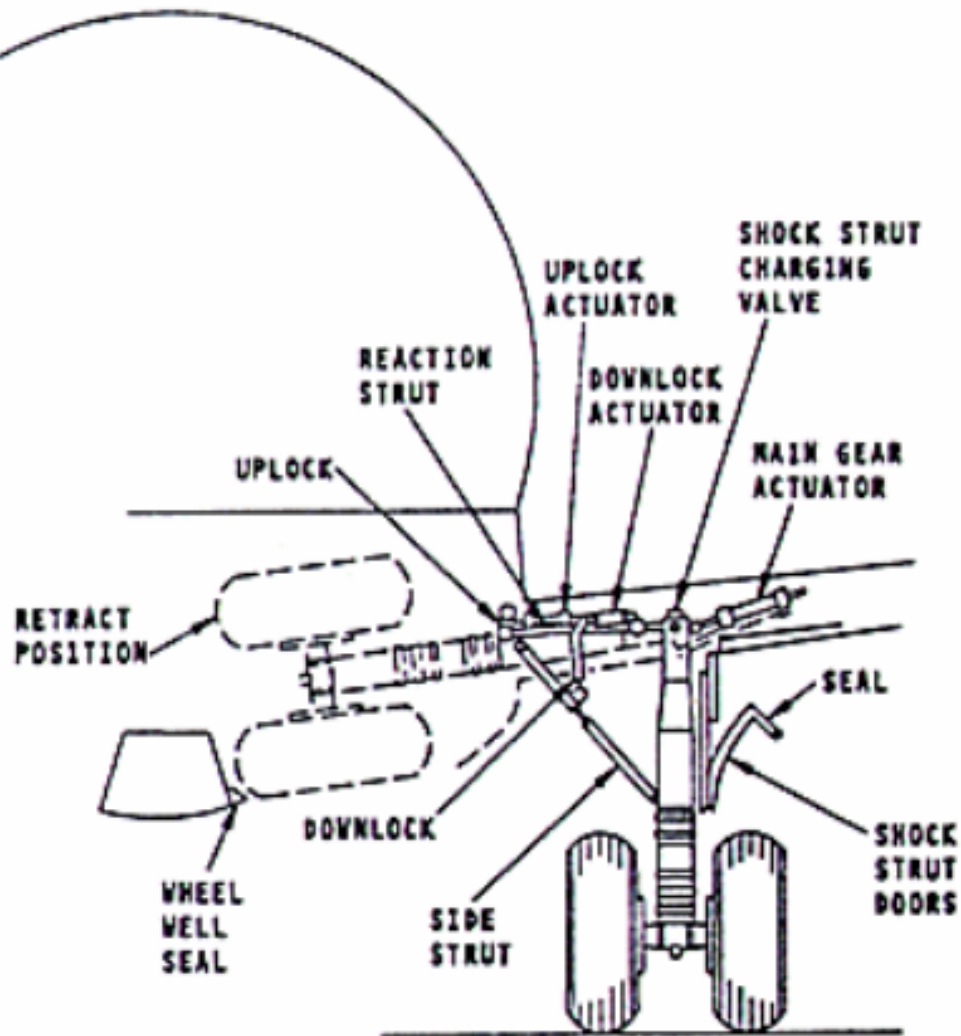


Figure 4: The location of the landing gear system in the aircraft

Interconnected Part List:

- Flight Control System: The flight control system is connected to the Landing Gear System and includes various components such as the flight control surfaces, cockpit controls, and computers that manage the flight of the aircraft.

The main purpose of the landing gear system, including the tire, is to support and cushion the

aircraft during landing and takeoff. The landing gear system absorbs the shock of landing and provides a smooth ride during takeoff. The hydraulic system provides the necessary pressure and fluid to operate the landing gear and brake assembly, while the brake assembly works to slow down and stop the aircraft during landing. Together, these interconnected parts ensure that the aircraft operates safely and reliably, and that the landing gear system can extend and retract smoothly.

2 Electronic Part Study

In this part, **the cable for the throttle valve on a Boeing 737** will be studied.

2.1 Part Location

The cable for the throttle valve, shown in Fig. (5), is located in the cockpit of the aircraft, specifically in the throttle quadrant, shown in Fig. (6). The throttle quadrant is a mechanical device that is used to control the aircraft's throttle, which in turn controls the amount of power being delivered to the engines. The cable is connected to the throttle lever in the cockpit and runs through the aircraft's control system to the engine. The position of the cockpit in the aircraft is shown in Fig. (7).

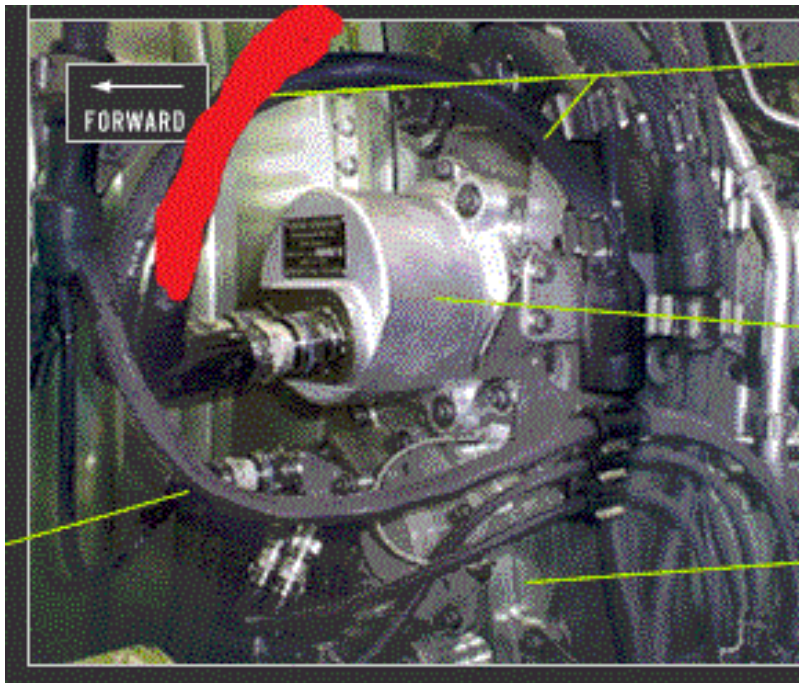


Figure 5: The cable for the throttle valve on a Boeing 737 (colored with red)

2.2 Level Analysis

2.2.1 Part level

Part location: The cable is a flexible, slender part that runs from the throttle control in the cockpit to the throttle valve located in the engine compartment.

Interconnected parts: The cable is connected to the throttle control in the cockpit on one end and to the throttle valve in the engine compartment on the other end.

The main purpose of the cable is to transmit the pilot's control inputs from the cockpit to the throttle valve, which adjusts the amount of fuel and air that is delivered to the engine. The cable provides a

physical link between the throttle control in the cockpit and the throttle valve, allowing the pilot to precisely control the engine's thrust.

2.2.2 Node level

Location: The cable is part of the throttle control system, which is a sub-system of the engine control system.

Interconnected parts:

- Throttle quadrant assembly: The throttle quadrant assembly is a control panel located in the cockpit that allows the pilot to control the throttle valve, along with other engine control systems, as shown in Fig.(6).
- Throttle body: The throttle body is a component located in the engine that regulates the flow of air into the engine. The cable is responsible for transmitting the pilot's commands from the cockpit to the throttle body, allowing for precise control of engine performance.
- Throttle position sensor: Throttle position sensor provides feedback to the pilot about the status and performance of the engine.

The main purpose of the throttle control system, which includes the cable, is to regulate the engine's thrust in response to the pilot's control inputs. The throttle control system receives inputs from the cockpit, processes them using information from engine sensors, and adjusts the amount of fuel and air delivered to the engine via the throttle valve. The cable is a critical component of the throttle control system, as it provides a physical link between the cockpit and the engine compartment.

2.2.3 Panel level

Location: The cable is routed through various panels and conduits within the aircraft, including the cockpit panel and engine compartment panels, as shown in Fig. (8)



Figure 8: B737 panel in the cockpit, which the cable is connected and interacted with

Interconnected parts:

- Throttle control panel: This panel is typically located on the center console of the cockpit, and allows the pilot to control various engine functions, including the throttle valve.

The main purpose of the panels and conduits is to provide a protective housing and routing for the cable, ensuring that it is properly secured and shielded from environmental factors such as temperature, vibration, and electromagnetic interference.

2.2.4 Section level

Location: The cable is part of the engine control section, which is a sub-section of the powerplant section of the aircraft.

Interconnected parts:

- Throttle control unit, which is responsible for converting the pilot's input into a signal that adjusts the engine's throttle setting.
- Engine control system, such as the electronic engine control unit (EECU), which receives the signal from the throttle control unit and uses it to adjust the engine's performance.
- Fuel control unit, which regulates the flow of fuel to the engine, and the engine ignition system, which provides the spark needed to ignite the fuel in the engine. These interconnected parts work together to ensure precise control and safe operation of the aircraft's engine.

The main purpose of the engine control section, which includes the cable, is to regulate the operation of the aircraft's engines. The engine control section receives inputs from the cockpit and engine sensors, and adjusts the engine's thrust by controlling the amount of fuel and air delivered to the engine via the throttle valve. The cable is a critical component of the engine control section, as it provides a physical link between the cockpit and the engine compartment.

2.2.5 Compartment level

Location: The cable is located in the engine compartment, which is a sub-compartment of the powerplant compartment of the aircraft.

- Cockpit compartment: The cockpit compartment houses the throttle quadrant, which is the cockpit control for the throttle valve cable.
- Avionics compartment: The avionics compartment houses the engine control unit, which receives signals from the throttle quadrant and controls the position of the throttle valve.
- Engine compartment: The engine compartment contains the throttle control assembly, which is connected to the throttle valve cable and adjusts the position of the valve based on input from the engine control unit. The cable runs from the cockpit compartment, through the avionics compartment, and into the engine compartment where it connects to the throttle control assembly.

The main purpose of the powerplant compartment, which includes the engine compartment and the cable for the throttle valve, is to provide a housing for the aircraft's engines and related components. The powerplant compartment is designed to provide adequate ventilation, cooling, and access for maintenance and repairs. The cable for the throttle valve is an integral part of the powerplant compartment

2.2.6 Unit level

- Flight Control Computer (FCC): The flight control computer provides the TCU with input on the current flight conditions and pilot commands.
- Hydraulic System: The throttle control assembly is responsible for controlling the flow of fuel and air to the engine, and it is connected to the hydraulic system via hydraulic lines that are responsible for actuating the assembly. The cable is connected to the throttle control assembly and is responsible for transmitting the control input from the cockpit to the throttle valve.
- Airframe: The cable is connected to the airframe through cable guides and pulleys that help to route the cable through the aircraft. The cable guides and pulleys are mounted to the airframe and allow the cable to move freely without getting tangled or obstructed.

The main purpose of the cable for the throttle valve at the level of the unit is to manage the performance and operation of the aircraft's engines, including monitoring engine parameters, controlling fuel flow, and adjusting engine power output. The system is responsible for ensuring that the engines operate safely, efficiently, and in accordance with the pilot's commands. This is achieved by interacting with multiple systems such as the avionics, hydraulic system, throttle control unit (TCU), and engine control Unit (ECU). It plays a critical role in the safe operation of the aircraft and its ability to perform its intended functions.