

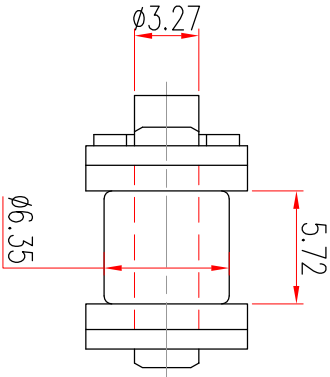


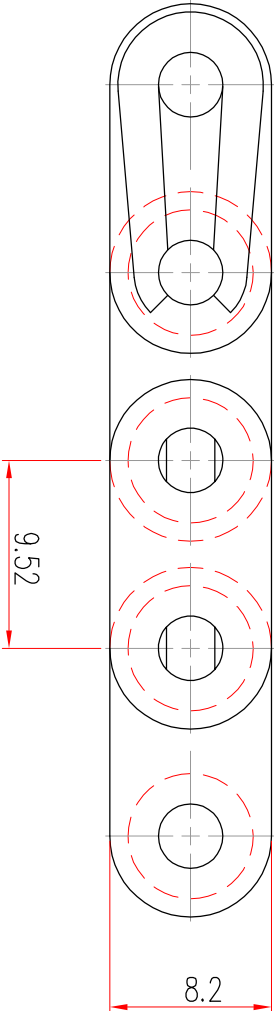

NOTICE THIS DRAWING IS THE PROPERTY OF THE WOOSUNG MECHANIC IS SUBMITTED WITH THE UNDERSTANDING THAT IT IS NOT TO BE REPRODUCED,NOR COPIED,NOR LOANED OR OTHERWISE COMMUNICATED TO ANY THIRD PARTY,NOR USED IN ANY MANNER DETRIMENTAL TO THE WOOSUNG MECHANIC.WITHOUT ITS EXPRESS CONSENT.ACCEPTANCE OF THIS DRAWING WILL BE CONSTRUED AS AN AGREEMENT TO THE ABOVE.

TOLERANCE (UNLESS OTHERWISE SPECIFIED)

30~40	40~50	50~60	60~70	70~80	80~90	90~100	100~120	120~150	150~200	200~400	400~
±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1
±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1
±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1

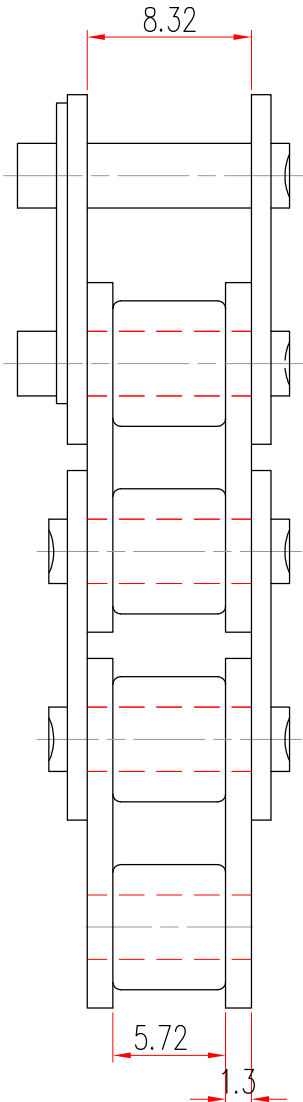

본 도면은 표준규격을 참고로 제작한 도면이지만 아래의 사항은
최종검제품도 상이한 규격(치수)를 가지고 있을수 있다.
따라서 설계 및 작업시에는 반드시 확인하여야 합니다.
- 리벳형식의 길이와 직경
- 연결볼트와 너트의 두께와 크기
- 내부, 외부링크의 내폭 및 외폭

QTY : 1 EA

WEIGHT : -Kg

MATERIAL

QTY

-

PART NAME

06B-1

ASSEMBLED PART No.

-

ASSEMBLED UNIT

-

MACHINE NAME

-

DESIGNED

CHECK

SCALE

1:1

DRAWING DATE

-