


NOTICE THIS DRAWING IS THE PROPERTY OF THE WOOSUNG MECHANIC IS SUBMITTED WITH THE UNDERSTANDING THAT IT IS NOT TO BE REPRODUCED,NOR COPIED,NOR LOANED OR OTHERWISE COMMUNICATED TO ANY THIRD PARTY,NOR USED IN ANY MANNER DETRIMENTAL TO THE WOOSUNG MECHANIC.WITHOUT ITS EXPRESS CONSENT.ACCEPTANCE OF THIS DRAWING WILL BE CONSTRUED AS AN AGREEMENT TO THE ABOVE.

TOLERANCE (UNLESS OTHERWISE SPECIFIED)

| STEE WORS | 1410 | 1420 | 1430 | 1440 | 1450 |
|-----------|------|------|------|------|------|
| 30~40     | ±0.3 | ±0.3 | ±0.3 | ±0.3 | ±0.3 |
| 70~100    | ±0.3 | ±0.3 | ±0.3 | ±0.3 | ±0.3 |
| 110~150   | ±0.3 | ±0.3 | ±0.3 | ±0.3 | ±0.3 |
| 160~200   | ±0.3 | ±0.3 | ±0.3 | ±0.3 | ±0.3 |
| 210~250   | ±0.3 | ±0.3 | ±0.3 | ±0.3 | ±0.3 |
| 260~300   | ±0.3 | ±0.3 | ±0.3 | ±0.3 | ±0.3 |
| 310~350   | ±0.3 | ±0.3 | ±0.3 | ±0.3 | ±0.3 |
| 360~400   | ±0.3 | ±0.3 | ±0.3 | ±0.3 | ±0.3 |
| 410~450   | ±0.3 | ±0.3 | ±0.3 | ±0.3 | ±0.3 |
| 460~500   | ±0.3 | ±0.3 | ±0.3 | ±0.3 | ±0.3 |
| 510~550   | ±0.3 | ±0.3 | ±0.3 | ±0.3 | ±0.3 |
| 560~600   | ±0.3 | ±0.3 | ±0.3 | ±0.3 | ±0.3 |
| 610~650   | ±0.3 | ±0.3 | ±0.3 | ±0.3 | ±0.3 |
| 660~700   | ±0.3 | ±0.3 | ±0.3 | ±0.3 | ±0.3 |
| 710~750   | ±0.3 | ±0.3 | ±0.3 | ±0.3 | ±0.3 |
| 760~800   | ±0.3 | ±0.3 | ±0.3 | ±0.3 | ±0.3 |
| 810~850   | ±0.3 | ±0.3 | ±0.3 | ±0.3 | ±0.3 |
| 860~900   | ±0.3 | ±0.3 | ±0.3 | ±0.3 | ±0.3 |
| 910~950   | ±0.3 | ±0.3 | ±0.3 | ±0.3 | ±0.3 |
| 960~1000  | ±0.3 | ±0.3 | ±0.3 | ±0.3 | ±0.3 |

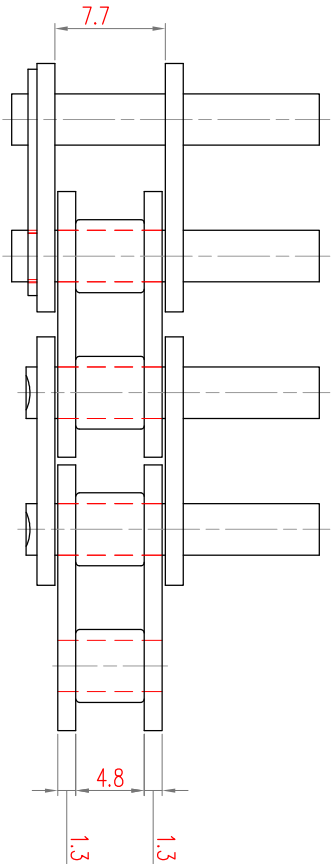

본 도면은 표준규격을 참고로 제작한 도면이지만 아래의 사항은  
최조항제별도 상이한 규격(치수)를 가지고 있을수 있다.  
따라서 설계 및 작성시에는 반드시 확인하여야 합니다.  
- 간벌행면의 길이와 직경  
- 연결플레이트의 두께 및 크기  
- 내부, 외부링크의 내폭 및 외폭

QTY : 1 EA

WEIGHT : -Kg

MATERIAL

-

QTY

-

PART NAME

35-1LEP

ASSEMBLED PART No.

-

ASSEMBLED UNIT

-

MACHINE NAME

-

DESIGNED

CHECK

SCALE

1:1

DRAWING DATE

-