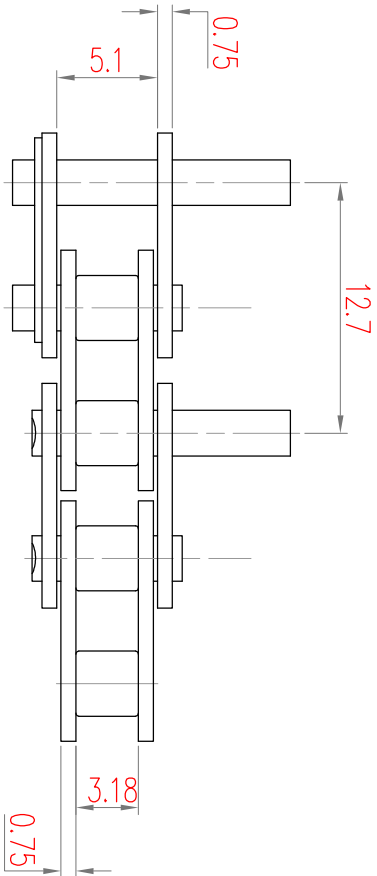


NOTICE THIS DRAWING IS THE PROPERTY OF THE WOOSUNG MECHANIC IS SUBMITTED WITH THE UNDERSTANDING THAT IT IS NOT TO BE REPRODUCED,NOR COPIED,NOR LOANED OR OTHERWISE COMMUNICATED TO ANY THIRD PARTY,NOR USED IN ANY MANNER DETRIMENTAL TO THE WOOSUNG MECHANIC.WITHOUT ITS EXPRESS CONSENT.ACCEPTANCE OF THIS DRAWING WILL BE CONSTRUED AS AN AGREEMENT TO THE ABOVE.

TOLERANCE (UNLESS OTHERWISE SPECIFIED)									
STEEL WORKS					MACHINING				
30~40	±0.3	±0.3	±0.3	±0.3	30~40	±0.1	±0.1	±0.1	±0.1
50~70	±0.3	±0.3	±0.3	±0.3	70~100	±0.05	±0.05	±0.05	±0.05
100~200	±0.3	±0.3	±0.3	±0.3	200~400	±0.1	±0.1	±0.1	±0.1
400~	±0.3	±0.3	±0.3	±0.3	400~	±0.1	±0.1	±0.1	±0.1
100~200	±0.3	±0.3	±0.3	±0.3	200~400	±0.1	±0.1	±0.1	±0.1
400~	±0.3	±0.3	±0.3	±0.3	400~	±0.1	±0.1	±0.1	±0.1

본 도면은 표준규격을 참고로 제작한 도면이지만 아래의 사항은 제조업체별로 상이한 규격(치수)을 가지고 있을 수 있다.
따라서 설계 및 작성시에는 반드시 확인하여야 합니다.

- 리벳볼트의 길이와 직경
- 연결볼트의 두께와 크기
- 내부, 외부링크의 내폭 및 외폭

QTY : 1	EA	WEIGHT : -Kg
MATERIAL		
-		
QTY		
-		
PART NAME		
25-2LEP		
ASSEMBLED PART No.		
-		
ASSEMBLED UNIT		
-		
MACHINE NAME		
-		
DESIGNED	CHECK	SCALE
		1:1
		DRAWING DATE
		-