




50 Hollow Pin

REVISION

-

-

피치 : 15.88mm
부시경 : 10.16mm
링크내폭 : 9.53mm
링크두께 : 2.0mm
핀외경 : 7.22mm
핀내경 : 5.12mm
핀길이 A : 21.7mm
핀길이 B : 20.1mm

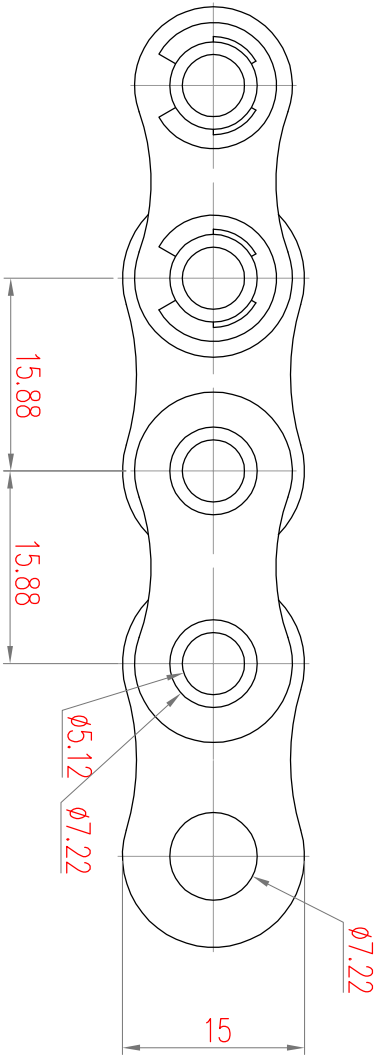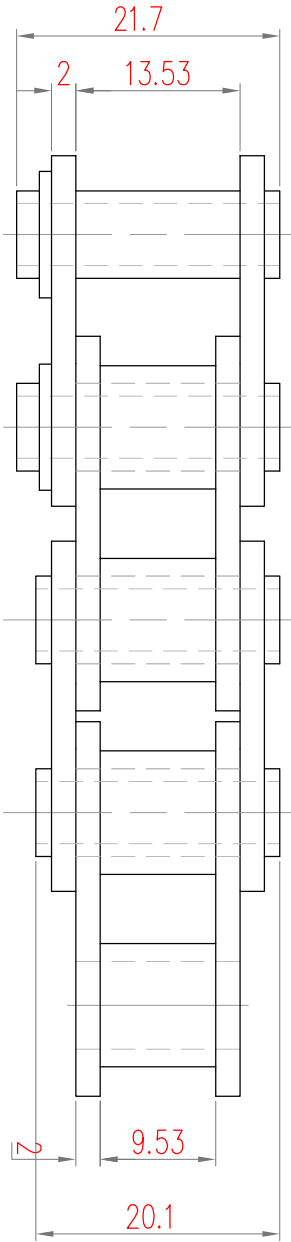

NOTICE THIS DRAWING IS THE PROPERTY OF THE WOOSUNG MECHANIC IS SUBMITTED WITH THE UNDERSTANDING THAT IT IS NOT TO BE REPRODUCED,NOR COPIED,NOR LOANED OR OTHERWISE COMMUNICATED TO ANY THIRD PARTY.NOR USED IN ANY MANNER DETRIMENTAL TO THE WOOSUNG MECHANIC.WITHOUT ITS EXPRESS CONSENT.ACCEPTANCE OF THIS DRAWING WILL BE CONSTRUED AS AN AGREEMENT TO THE ABOVE.

TOLERANCE (UNLESS OTHERWISE SPECIFIED)

SIZE	STEE WINGS	MACHINING
30~40	±0.10	±0.10
50~60	±0.15	±0.15
70~80	±0.20	±0.20
100~120	±0.25	±0.25
150~200	±0.30	±0.30



본 도면은 표준규격을 참고로 제작한 도면이지만 아래의 사항은
최조항제별도 상이한 규격(尺寸)을 가지고 있을 수 있다.
따라서 설계 및 작업시에는 반드시 확인하여야 합니다.
- 리벳형면의 길이와 직경
- 연결플레이트의 두께와 크기
- 내부, 외부링크의 내폭 및 외폭

QTY : 1 EA WEIGHT : -Kg

MATERIAL	QTY	
-	-	-

PART NAME	50 Hollow Pin
-----------	---------------

ASSEMBLED PART No.	-
--------------------	---

ASSEMBLED UNIT	-
----------------	---

—			
DESIGNED	CHECK	SCALE	DRAWING DATE