| REVISION | – | – |
|---|---|---|

# 60 Hollow Pin

피치 : 19.05mm
부시경 : 11.9mm
링크내폭 : 12.7mm
링크두께 : 2.4mm
핀외경 : 8.4mm
핀내경 : 5.99mm
핀길이 A : 26.8mm
핀길이 B : 25.1mm

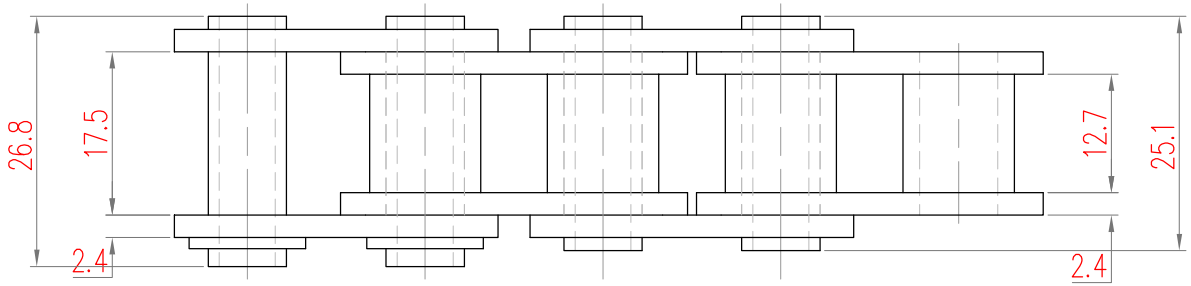


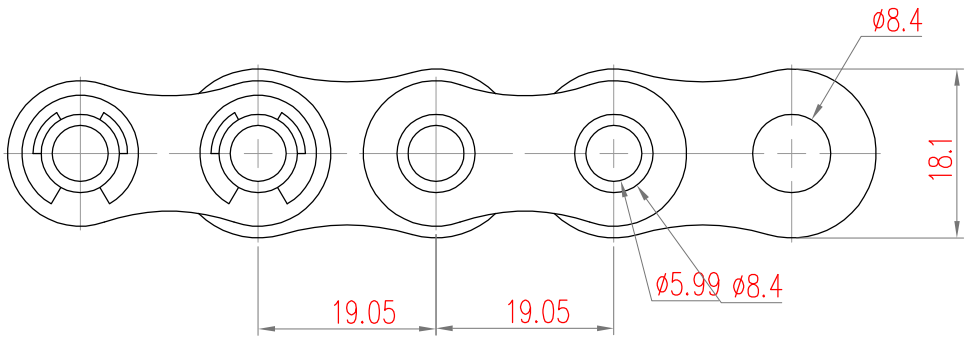





NOTICE THIS DRAWING IS THE PROPERTY OF THE WOOSUNG MECHANIC IS SUBMITTED WITH THE UNDERSTANDING THAT IT IS NOT TO BE REPRODUCED,NOR COPIED,NOR LOANED OR OTHERWISE COMMUNICATED TO ANY THIRD PARTY,NOR USED IN ANY MANNER DETRIMENTAL TO THE WOOSUNG MECHANIC.WITHOUT ITS EXPRESS CONSENT.ACCEPTANCE OF THIS DRAWING WILL BE CONSTRUED AS AN AGREEMENT TO THE ABOVE.

TOLERANCE (UNLESS OTHERWISE SPECIFIED)

| STEEL WORKS | | | | MACHINING | | | |
|---|---|---|---|---|---|---|---|
| ~30 | ±0.5 | 1000~2000 | ±3.0 | ~30 | ±0.03 | 1000~2000 | ±1.0 |
| 30~120 | ±0.8 | 2000~4000 | ±4.0 | 30~120 | ±0.05 | 2000~4000 | ±2.0 |
| 120~400 | ±1.2 | 4000~ | ±6.0 | 120~400 | ±0.1 | 4000~ | ±3.0 |
| 400~1000 | ±2.0 | | | 400~1000 | ±0.5 | | |

Woosung Mechanic

본 도면은 표준규격을 참고로 제작한 도면이지만 아래의 사항은 제조업체별로 상이한 규격(치수)를 가지고 있을수 있다.
따라서 설계및 적용시에는 반드시 확인하여야 합니다.

- 리벳형핀의 길이와 직경
- 연결플레이트의 두께및 크기
- 내부, 외부링크의 내폭및 외폭

| Q'TY : 1 EA | WEIGHT : -Kg |
|---|---|

| MATERIAL | Q'TY | |
|---|---|---|
| – | – | – |

PART NAME: 60 Hollow Pin

ASSEMBLED PART No.: –

ASSEMBLED UNIT: –

MACHINE NAME: –

| DESIGNED | CHECK | SCALE | DRAWING DATE |
|---|---|---|---|
| | | 1:1 | – |