




80 Hollow Pin

REVISION

-

-

피치 : 25.4mm
부시경 : 15.9mm
링크내폭 : 15.9mm
링크두께 : 3.2mm
핀외경 : 11.4mm
핀내경 : 8.0mm
핀길이 A : 34.1mm
핀길이 B : 32.5mm

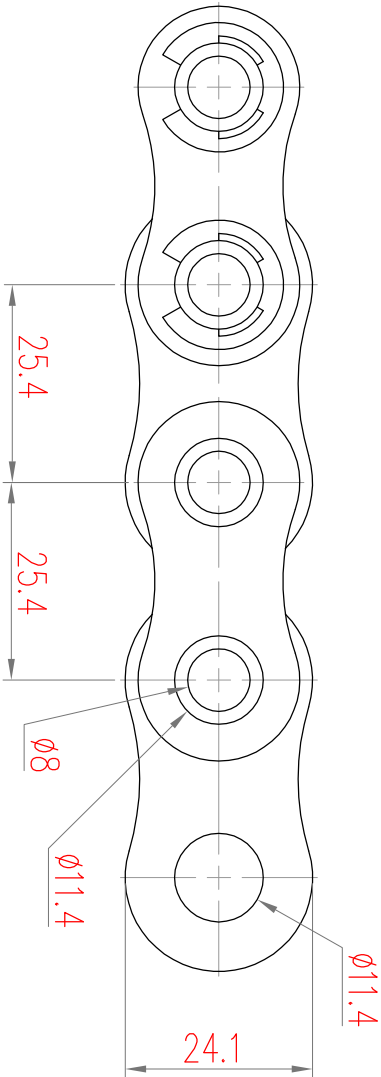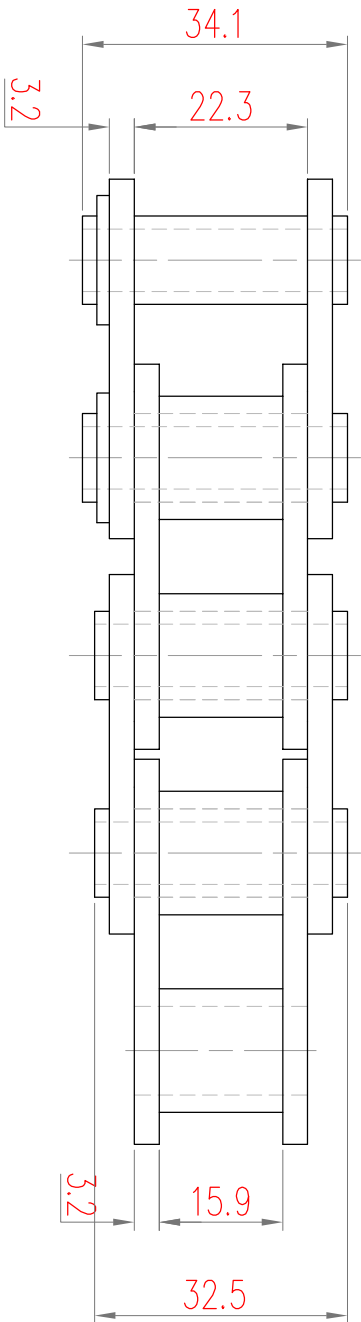

NOTICE THIS DRAWING IS THE PROPERTY OF THE WOOSUNG MECHANIC IS SUBMITTED WITH THE UNDERSTANDING THAT IT IS NOT TO BE REPRODUCED,NOR COPIED,NOR LOANED OR OTHERWISE COMMUNICATED TO ANY THIRD PARTY.NOR USED IN ANY MANNER DETRIMENTAL TO THE WOOSUNG MECHANIC.WITHOUT ITS EXPRESS CONSENT.ACCEPTANCE OF THIS DRAWING WILL BE CONSTRUED AS AN AGREEMENT TO THE ABOVE.

TOLERANCE (UNLESS OTHERWISE SPECIFIED)

30~40	40~50	50~60	60~70	70~80	80~90	90~100	100~120	120~150	150~200	200~300	300~400	400~
±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1
±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1
±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1



Woosung Mechanic

본 도면은 표준규격을 참고로 제작한 도면이지만 아래의 사항은
최조당제품도 상이한 규격(尺寸)을 가지고 있을수 있다.
따라서 설계 및 작업시에는 반드시 확인하여야 합니다.
- 리벳머신의 길이와 직경
- 연결볼라이트의 두께와 크기
- 내부, 외부링크의 내폭 및 외폭

QTY : 1 EA WEIGHT : -Kg

MATERIAL QTY

PART NAME 80 Hollow Pin

ASSEMBLED PART No.

ASSEMBLED UNIT

MACHINE NAME

DESIGNED CHECK SCALE 1:1 DRAWING DATE