

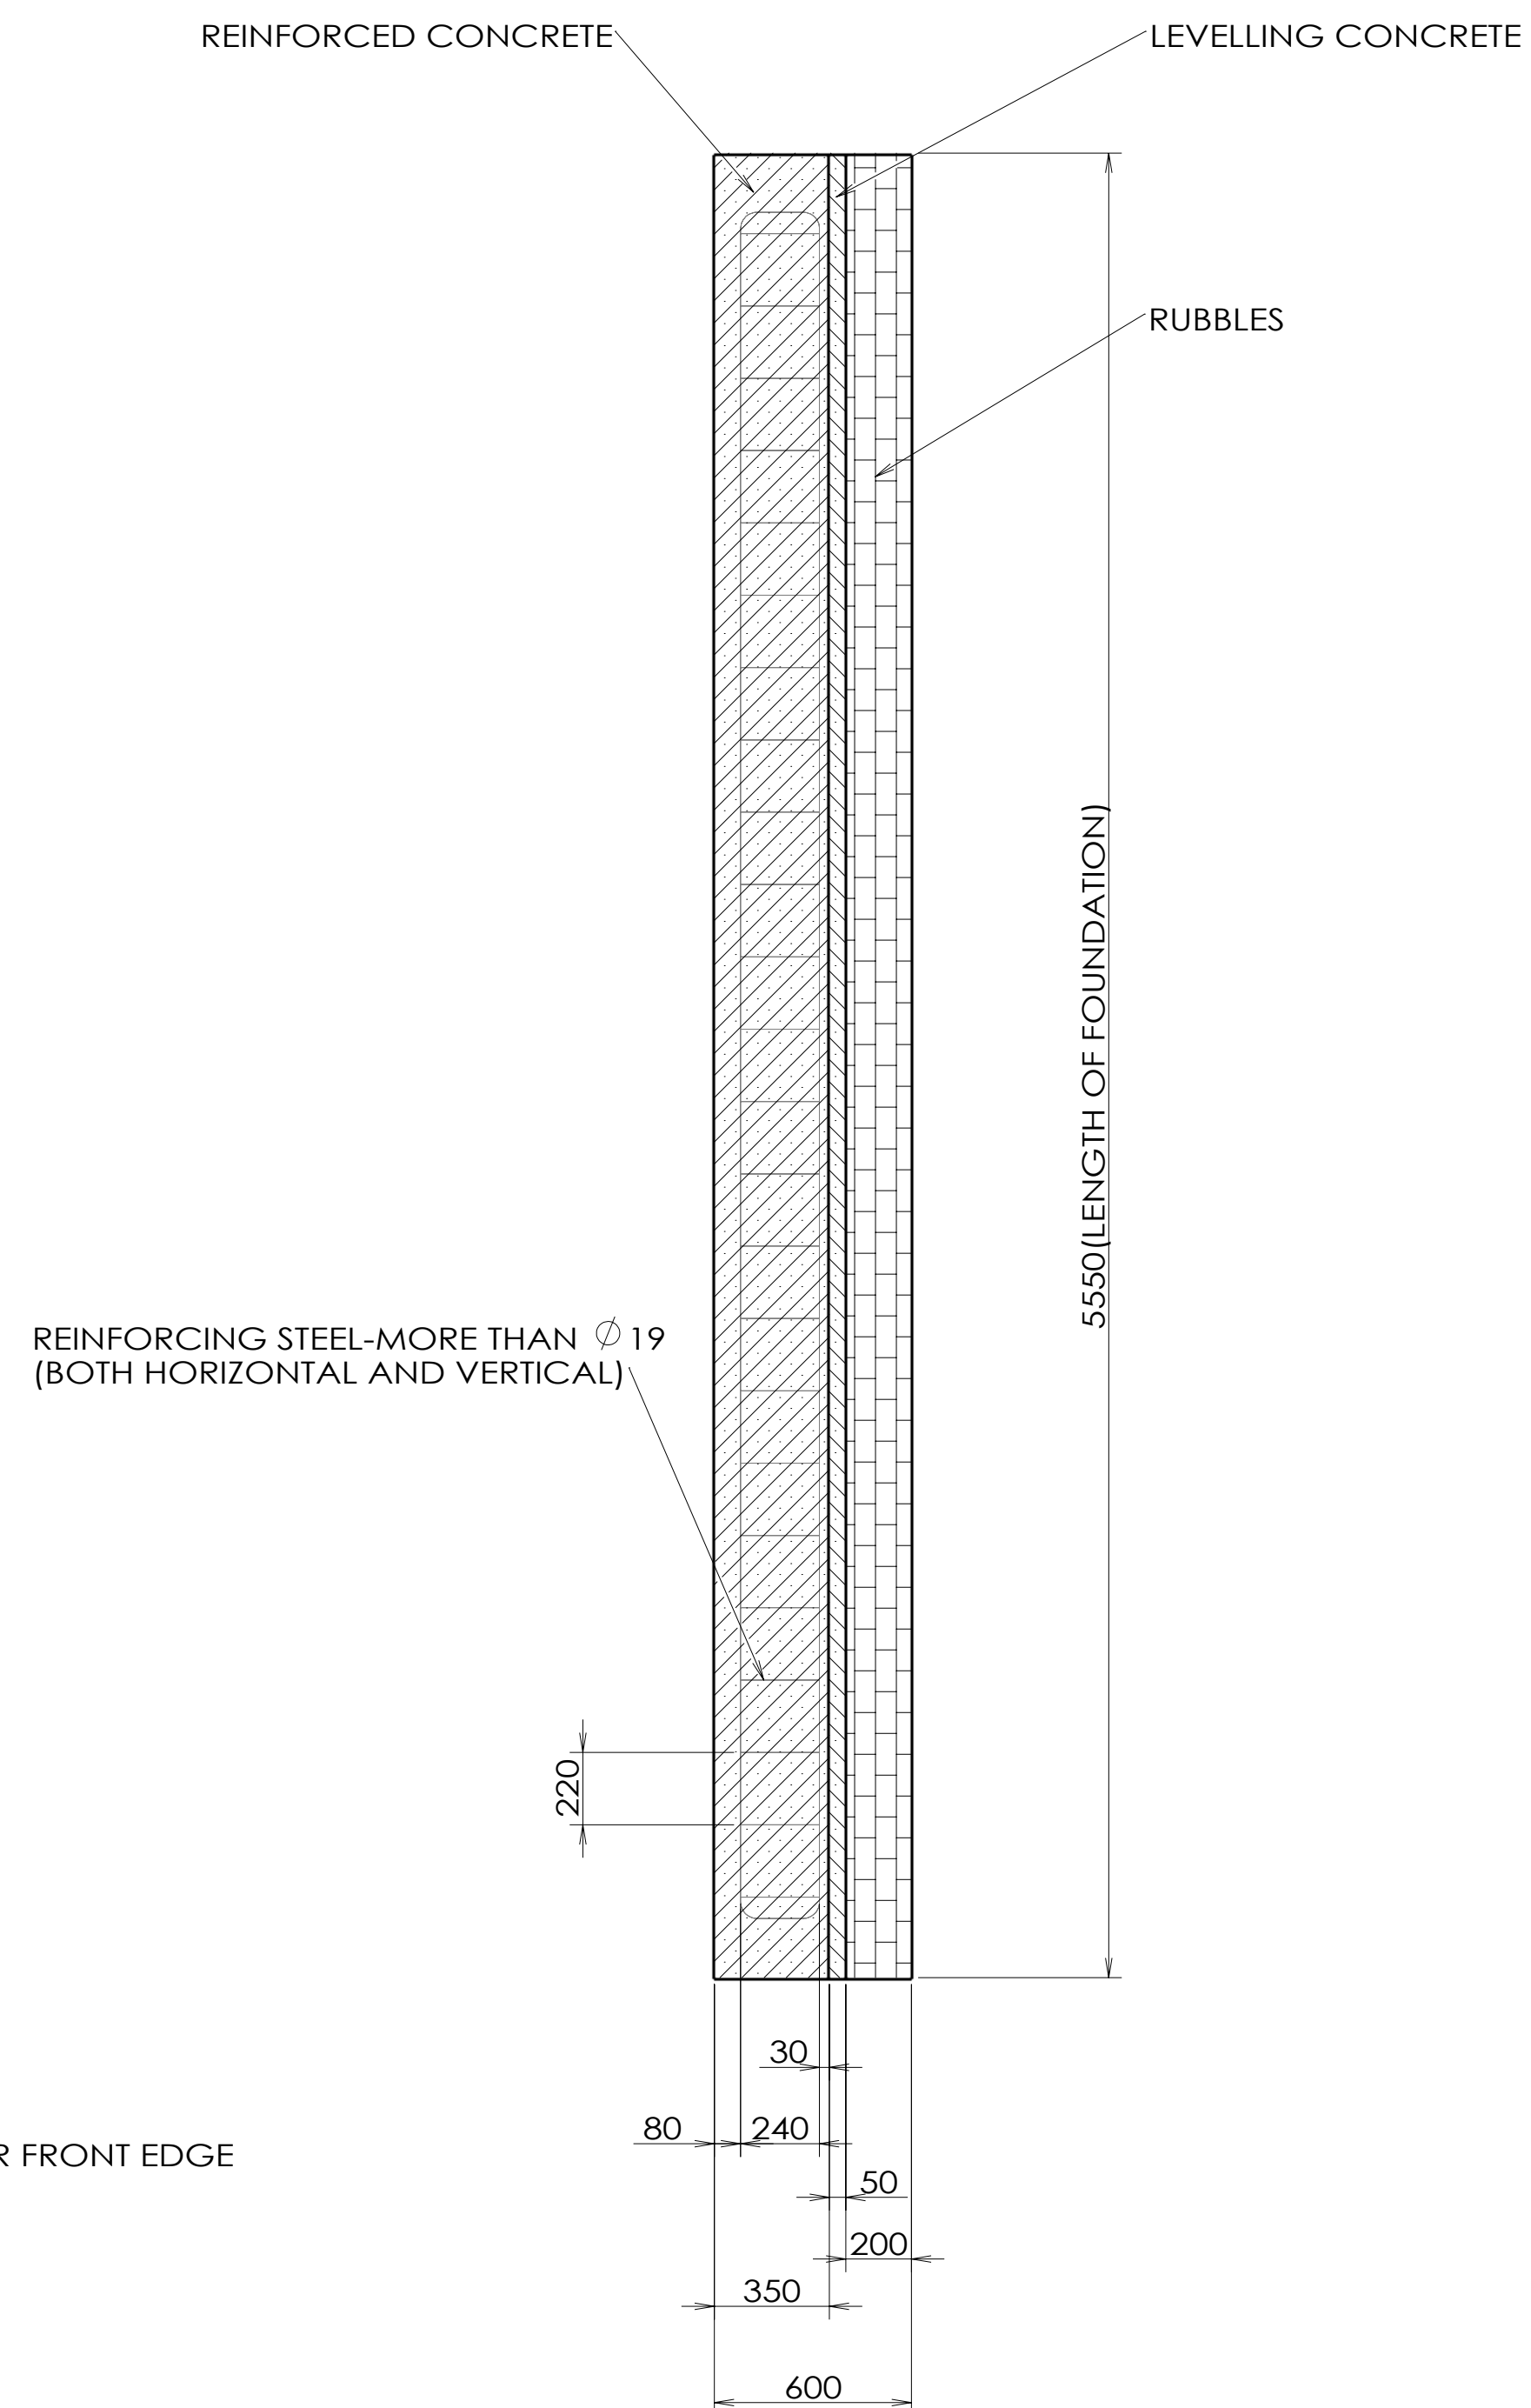


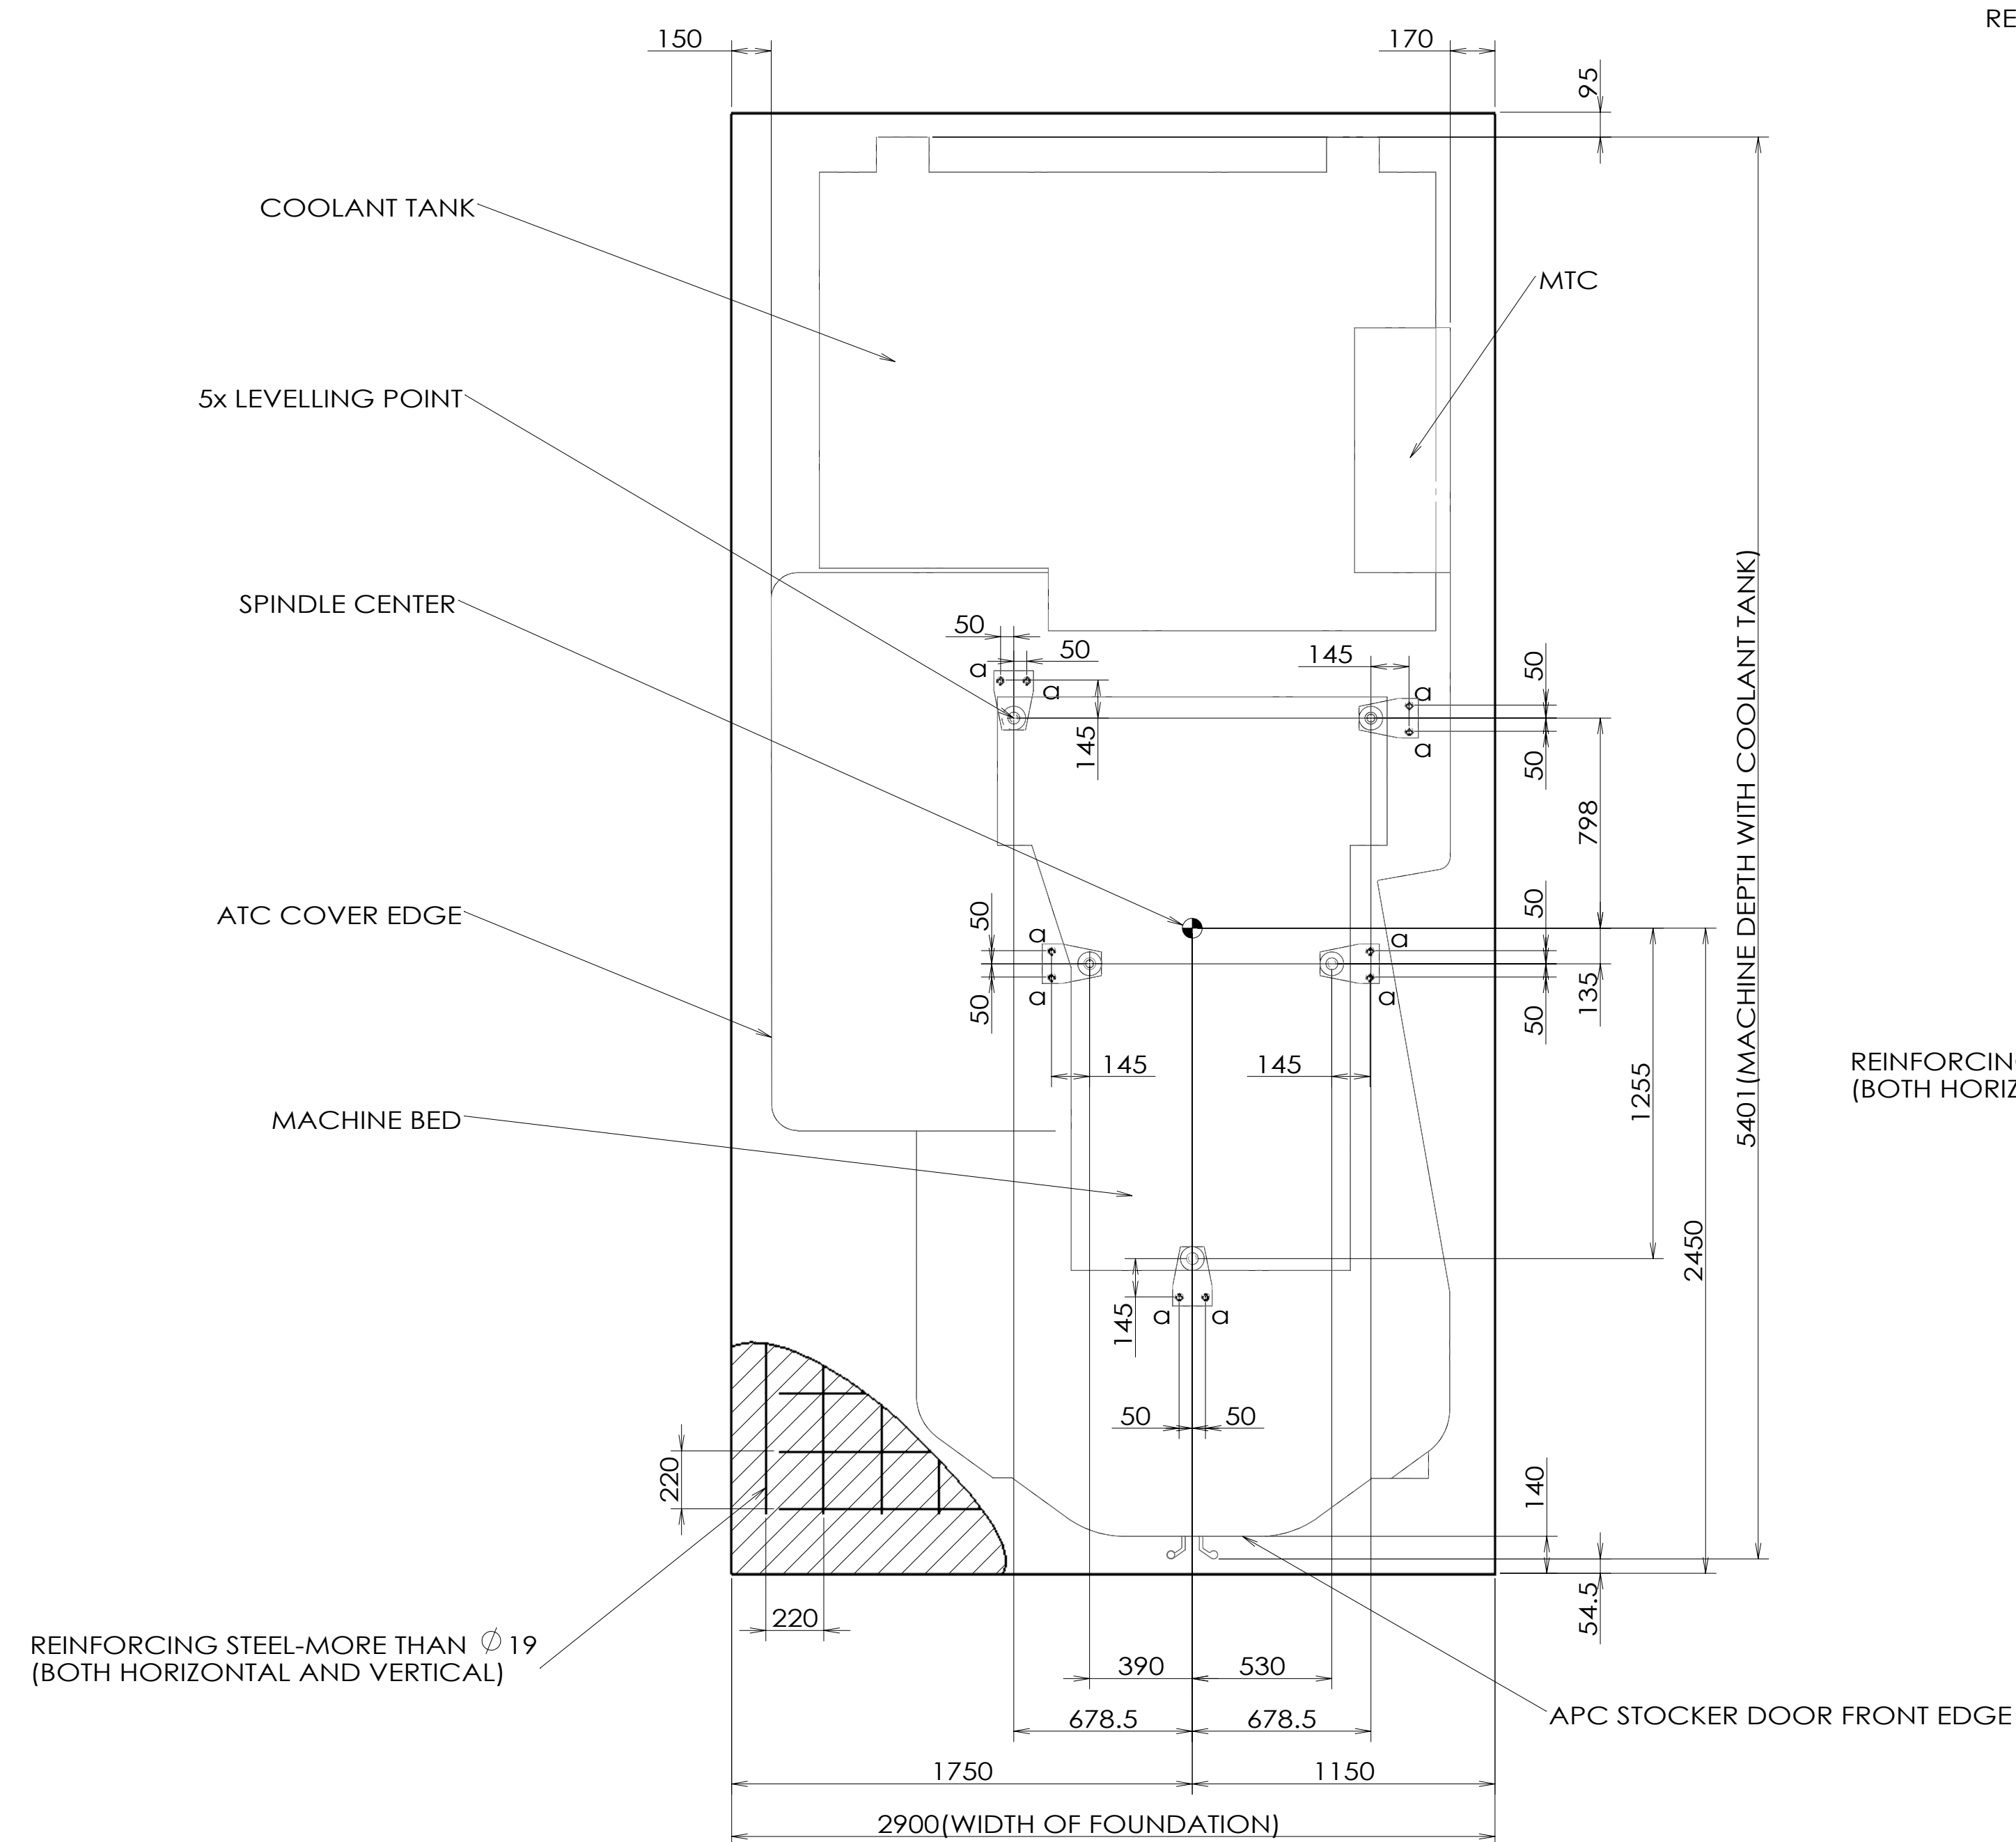


ANCHOR DETAIL:
ANCHOR BOLT
MODEL NO: JA-M16
NUMBER OF BOLTS: 10
MAKE: JAPAN DRIVE-IT
MAKINO PART No. : Z279C0500160

1. Drill Hole
2. Blow out dust and fragments

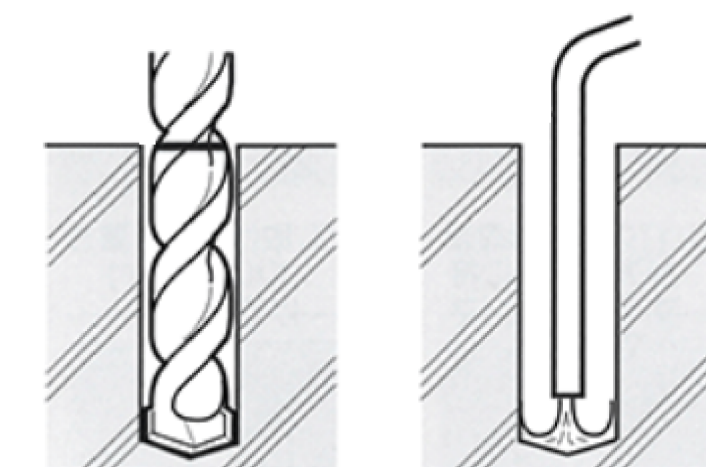

3. Insert Anchor
4. Use a driving rod to hammer until the response changes.

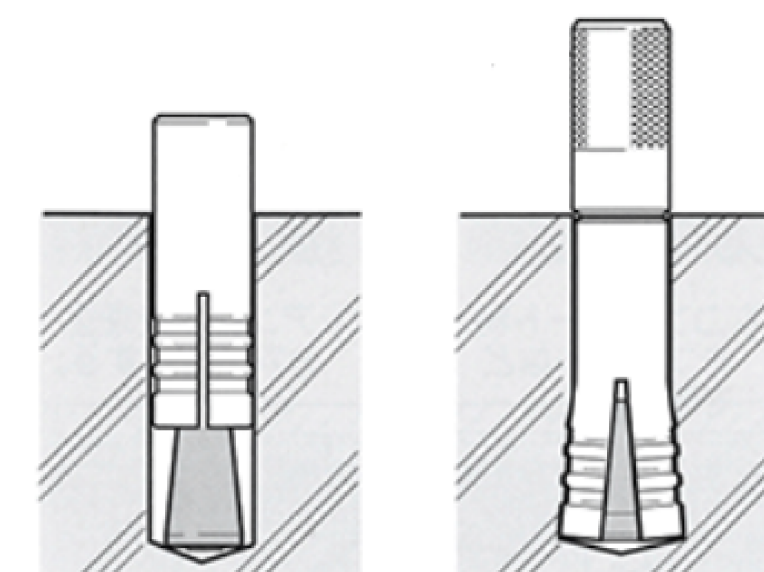

NOTE:

1. ALLOWABLE SOIL BEARING CAPACITY: 49kPA (5 ton/m²).
2. CONCRETE OF MORE THAN FC250 SHOULD BE USED.
3. CONCRETE WEIGHT IS ESTIMATED 14.8 ton (SPECIFIC GRAVITY IS 2.3g/cm³).
4. FOR THE RUBBLES, MEDIUM OR LARGE SIZE CRUSHED STONES SHOULD BE USED.
5. APPROXIMATE WEIGHT ON THE FOUNDATION (MACHINE) IS 12 ton.
6. DIMENSIONS STATED FOR THE DISTANCE BETWEEN TWO REINFORCING STEELS IS FOR REFERENCE ONLY.

0	0	--	NEW RELEASE		27 MAR 25	MH02-0128	LIWZ
SUFFIX	REVISION	C.N.	DESCRIPTION OF CHANGE	MODEL	DATE	ECONO.	CHANGED BY
				H02			
APPROVED BY	CHECKED BY		DESIGNED BY		DATE		
CHOW JF	GATEIN		LIWZ		25/02/25		
 THIRD ANGLE PROJECTION				SCALE	SIZE		
				1 : 20	A1		
THIS DRAWING MUST NOT BE COPIED OR DISCLOSED TO A THIRD PARTY WITHOUT THE PERMISSION FROM "MAKINO". 複製・改訂・無断での公開・転写・その他の利用は禁止します。							
 MAKINO					MAKINO ASIA PTE LTD FOUNDATION CX33		
DWG. NUMBER			図面番号			SHEET	
2HS903A2001=0			1/1				