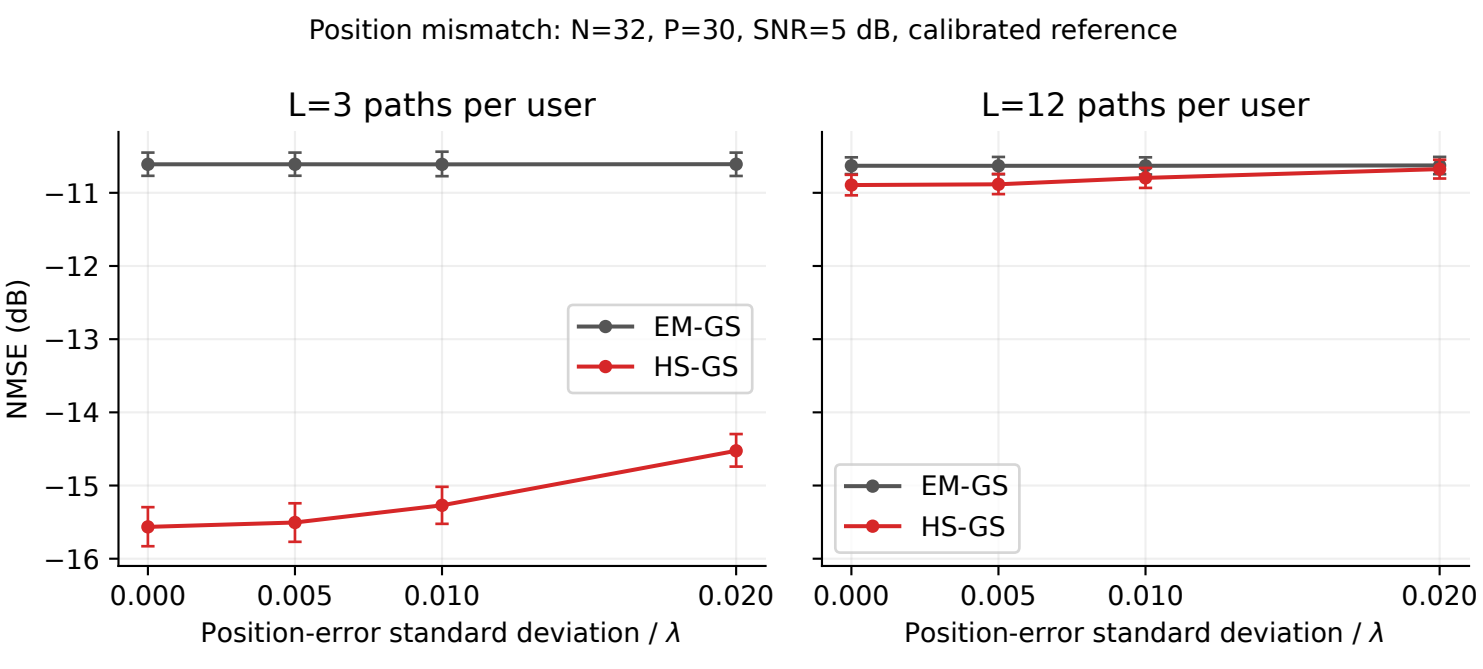
Position mismatch: N=32, P=30, SNR=5 dB, calibrated reference
L=3 paths per user
L=12 paths per user
NMSE (dB)
−11
−12
−13
−14
−15
−16
EM-GS
HS-GS
0.000
0.005
0.010
0.020
Position-error standard deviation / λ