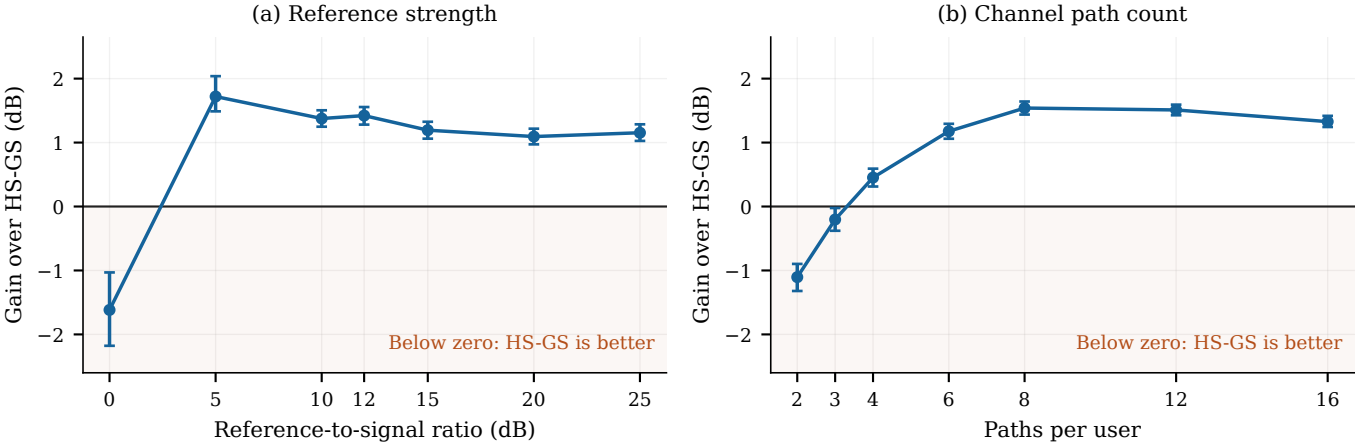
(a) Reference strength
(b) Channel path count
Gain over HS-GS (dB)
Gain over HS-GS (dB)
2
1
0
−1
−2
Below zero: HS-GS is better
Below zero: HS-GS is better
0
5
10
12
15
20
25
2
3
4
6
8
12
16
Reference-to-signal ratio (dB)
Paths per user