INT8 inference on ESP32-C3

Complete-model latency · scalar RV32IMC · 160 MHz CPU · 40 MHz DIO flash

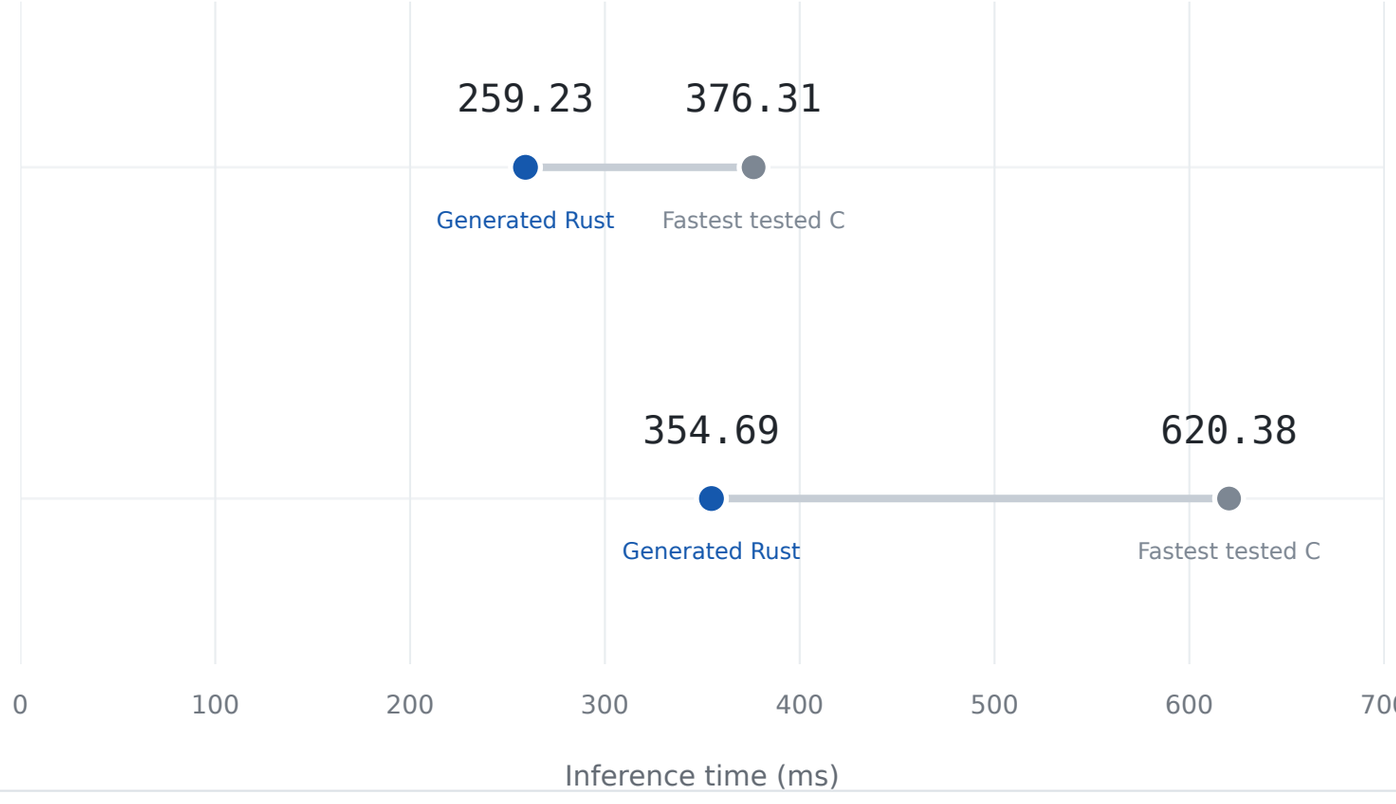

3 reset sessions	480 timed inferences	2,256 tensor checks	0 mismatches

Four validation inputs per model; five observations per input/backend/boot. Values average per-input medians across three boots.

C control: fastest tested ESP-NN / muRISCV-NN path per input. Speedups use geometric-mean input ratios. One board; hard resets, not power cycles.