

**TECHSPEC® 975nm CWL, 25mm Dia. Hard Coated OD 4.0 25nm Bandpass
Filter**
#87-798



TECHSPEC® Hard Coated OD 4.0 25nm Bandpass Filters are designed to be a midrange alternative to broadband or narrowband filters. These filters are ideal for fluorescence microscopy or other life science applications that rely on fluorescence detection such as flow cytometry or qPCR. TECHSPEC® Hard Coated OD 4.0 25nm Bandpass Filters can also be used to eliminate unwanted background noise while enhancing the signal-to-noise ratio in imaging or machine vision applications. The filters are designed to have a 0° angle of incidence and are mounted in a black anodized ring. Hard Coated OD 4.0 [5nm](#), [10nm](#), and [50nm](#) bandpass filters are also available.

Note: These filters are optimized for high spectral performance rather than high Laser Induced Damage Thresholds (LIDT). A typical LIDT for these filters is 1 J/cm² @ 532nm, 10ns. Please [contact us](#) if you require a filter with a higher LIDT value.

General

Type: Bandpass Filter

Physical & Mechanical Properties

Diameter (mm):	25.00 +0.0/-0.1
Clear Aperture CA (mm):	21.0
Thickness with Mount (mm):	5.00
Construction:	Mounted in Black Anodized Ring
Physical Durability:	Adhesion per MIL-PRF-13830B, Section C.4.5.12 Moderate abrasion per MIL-PRF-13830B, Section C.4.5.11 Cleaning per MIL-C-48497A Section 4.5.4.2
Substrate Thickness (mm):	3.5 ±0.5

Optical Properties


Angle of Incidence (°):	0
Bandwidth (nm):	20
Optical Density OD (Average):	≥4.0
Center Wavelength CWL (nm):	975.00 ±3
Center Wavelength CWL Tolerance (nm):	±3
Full Width-Half Max FWHM (nm):	25.00 ±3
Full Width-Half Max FWHM Tolerance (nm):	±3
Substrate:	Optical Glass
Minimum Transmission (%):	>90
Coating:	Hard Coated
Surface Quality:	80-50
Blocking Wavelength Range (nm):	200 - 1200

Threading & Mounting

Mount Thickness (mm): 5.0 ±0.1

Environmental & Durability Factors

Environmental Durability: Humidity per MIL-STD-810H, Section 507.6
Temperature per MIL-STD-810H, Section 501.7 and 502.7

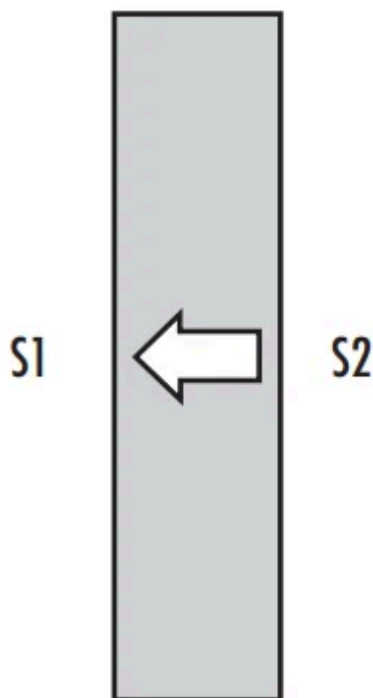

All mounted TECHSPEC® Optical Filters have an arrow on the side of the mount that points to the filter-coated surface for quick reference. Filter oriented such that arrow points to filter coated surface S1. Anti-reflective (AR) coating is applied to S2.



May 29, 2026

To Whom It May Concern,

This document certifies that the product stated below has been reviewed as requested by Edmund Optics:

Stock No.	Description
87-798	975nm CWL, 25mm Dia. Hard Coated OD 4.0 25nm Bandpass Filter

This item is EU RoHS (2015/863/EU) compliant without the use of exemptions.

This certification means that:

#87-798
Subject to technical modifications (29-05-2026)

- EO has implemented rigorous procedures to document this compliance.
- The information provided may, or may not, be based upon actual test data, or on information from our Vendors, Raw Material Suppliers or Subcontractors.



Jay Budd, Director of Corporate Compliance
May 29, 2026

Edmund Optics Inc. - 101 E Gloucester Pike, Barrington, NJ 08007 | 1-800-363-1992 | Compliance@edmundoptics.com



May 29, 2026

<i>Stock No.</i>	<i>Description</i>
87-798	975nm CWL, 25mm Dia. Hard Coated OD 4.0 25nm Bandpass Filter

Edmund Optics certifies that all articles included in this shipment are in compliance with the terms and conditions of this order. The company also certifies that the articles included in this shipment are in accordance to all agreed upon specifications and quality assurance provisions. Please call 1-800-363-1992 should any questions arise from this shipment.



Jeff Harvey- EVP of Operations



May 29, 2026

To Whom It May Concern,

This document certifies that the product stated below has been reviewed as requested by Edmund Optics:

Stock No.	Description
87-798	975nm CWL, 25mm Dia. Hard Coated OD 4.0 25nm Bandpass Filter

This item does not contain any of the substances listed on the Reach SVHC list as of 21 January 2025 in quantities exceeding 0.1% weight by weight.

Please note the following:

- Entry 11 of Annex V of the REACH regulation EC 1907/2006 as amended by regulation 987/2008, exempts “non-hazardous” glass components from registration.
- Items considered to be packing materials and which do not form part of, or are not required for the operation of, the product, are not considered to be within scope of this declaration.
- EO does not routinely analyze products for substances not purposely added or specified within the design specifications, drawings and assembly procedures.

This certification means that:




- EO's suppliers have confirmed the material composition of this product.
- EO has implemented rigorous procedures to document this compliance.
- The information provided may, or may not, be based upon actual test data, or on information from our Vendors, Raw Material Suppliers or Subcontractors.



Jay Budd, Director of Corporate Compliance
May 29, 2026

Edmund Optics Inc. - 101 E Gloucester Pike, Barrington, NJ 08007 | 1-800-363-1992 | Compliance@edmundoptics.com

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

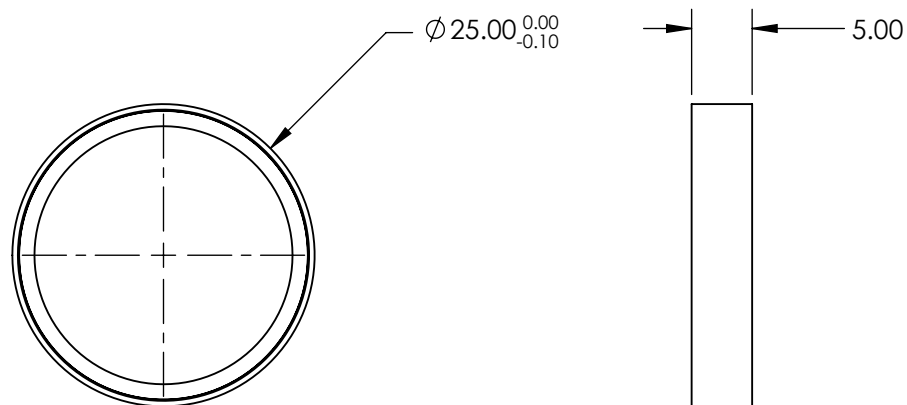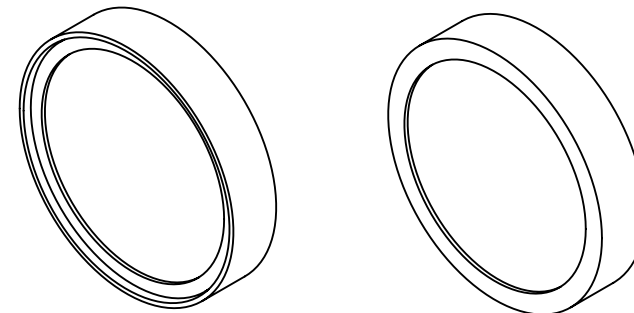

BANDPASS FILTER

REV. A	VALUE
CENTER WAVELENGTH (CWL)	975 ± 3 nm
FULL WIDTH HALF MAX (FWHM)	25 ± 3 nm
MINIMUM TRANSMISSION	>90
BLOCKING	200 - 1200nm
SURFACE QUALITY	80-50
COATING TYPE	HARD COATED
DURABILITY	MIL-C-48497A
ENVIRONMENTAL	MIL-STD-810F

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

EO[®] Edmund Optics[®]



ALL DIMS IN mm

TITLE

OD4, Ø25mm, 975nm x 25nm, HD BANDPASS
FILTER

DWG NO

87798

SHEET
1 OF 1