

TECHSPEC® NIR (750-1100nm) OD 4.0 25nm Bandpass Filter Kit, 25mm

Dia

#88-301



TECHSPEC® Hard Coated OD 4.0 Bandpass Filter Kits include a variety of optical bandpass filters that are designed for narrowband to broadband performance in the visible, near-infrared, or infrared wavelength ranges. The included optical bandpass filters are manufactured using a single glass substrate to remove the potential performance loss caused by absorbing glass or silver blocking layers, custom dyes, or lamination. TECHSPEC® Hard Coated OD 4.0 Bandpass Filters Kits are ideal for applications including chemical analysis, bio-imaging, or machine vision.

Note: Due to supply chain issues, our kits may be delivered with an alternative packaging solution in place of a wooden box. For any questions, please contact kits@edmundoptics.com.

General

Filters Included :	CWL: 750nm , 800nm , 850nm , 900nm , 950nm , 1000nm , 1050nm , 1100nm
Type:	Bandpass Filter
Typical Applications:	LED Cleanup, Bio-Imaging, Machine Vision
Number of Filters:	8

Physical & Mechanical Properties

Diameter (mm):	25.00
Physical Durability:	Adhesion: MIL-C-48497A, 3.4.1.1 Abrasion: MIL-C-48497A, 3.4.1.3 Temperature: MIL-C-48497A, 3.4.2.1 Cleaning: MIL-C-48497A, 3.4.2.9


Optical Properties

Optical Density OD (Average):	≥4.0
Full Width-Half Max FWHM (nm):	25.00
Coating:	Hard Coated
Wavelength:	NIR


Environmental & Durability Factors

Environmental Durability:	Humidity: MIL-STD 810.F, Method 507.4
---------------------------	---------------------------------------

10nm Bandpass Filter Kit Curve 400 - 700nm Spectral Range

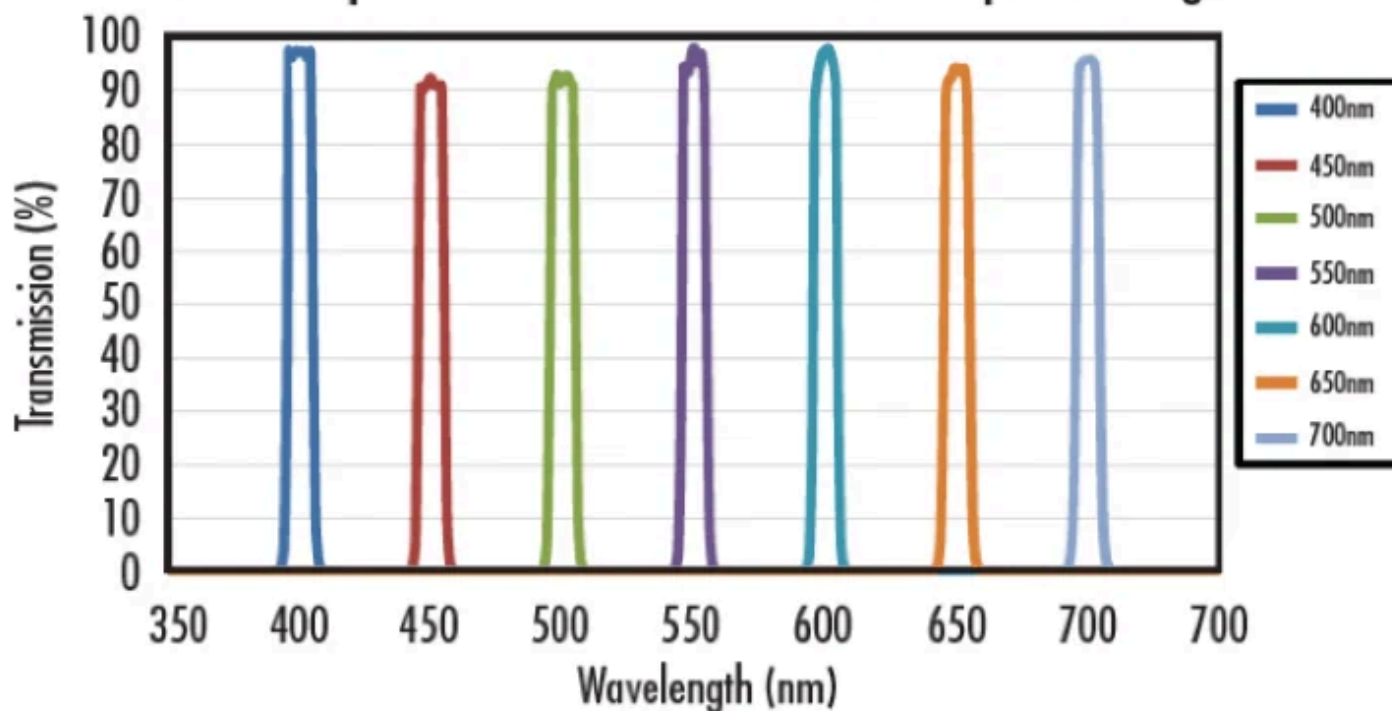


25nm Bandpass Filter Kit Curve 750 - 1100nm Spectral Range

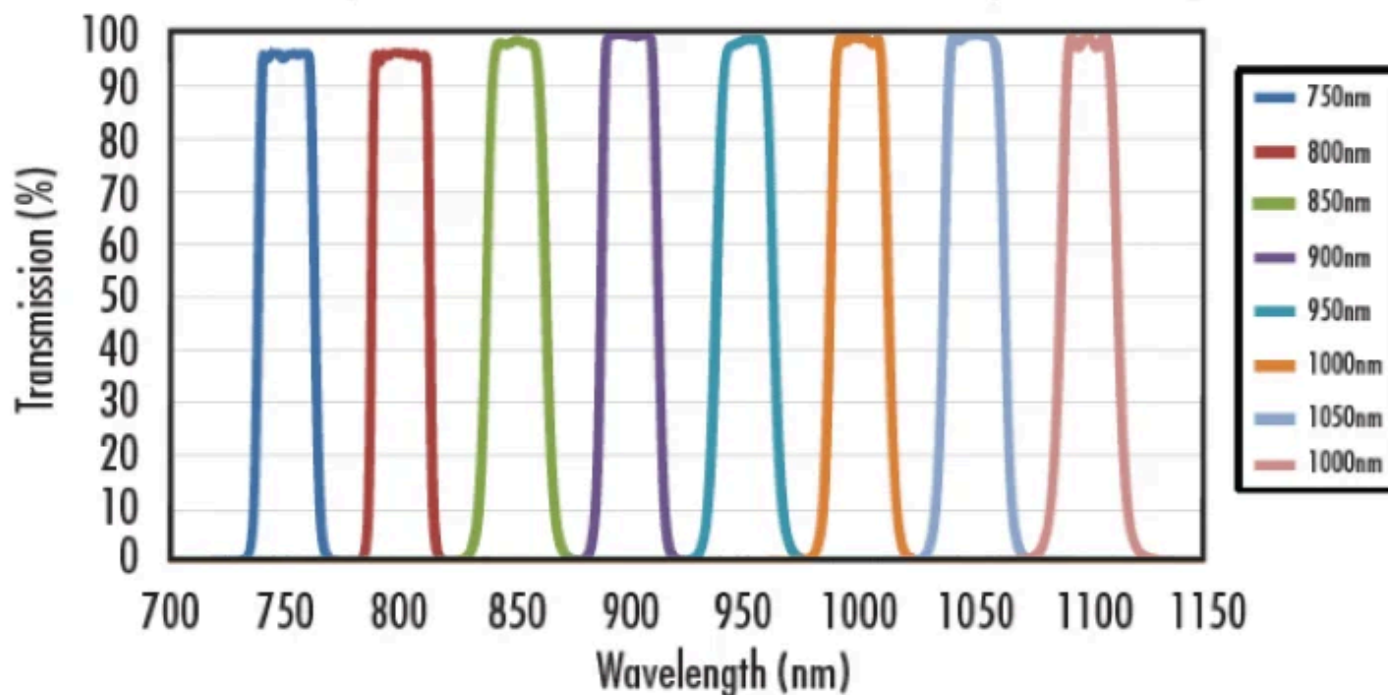

#88-301
Subject to technical modifications (29-05-2026)

50nm Bandpass Filter Kit Curve 1150 - 1550nm Spectral Range

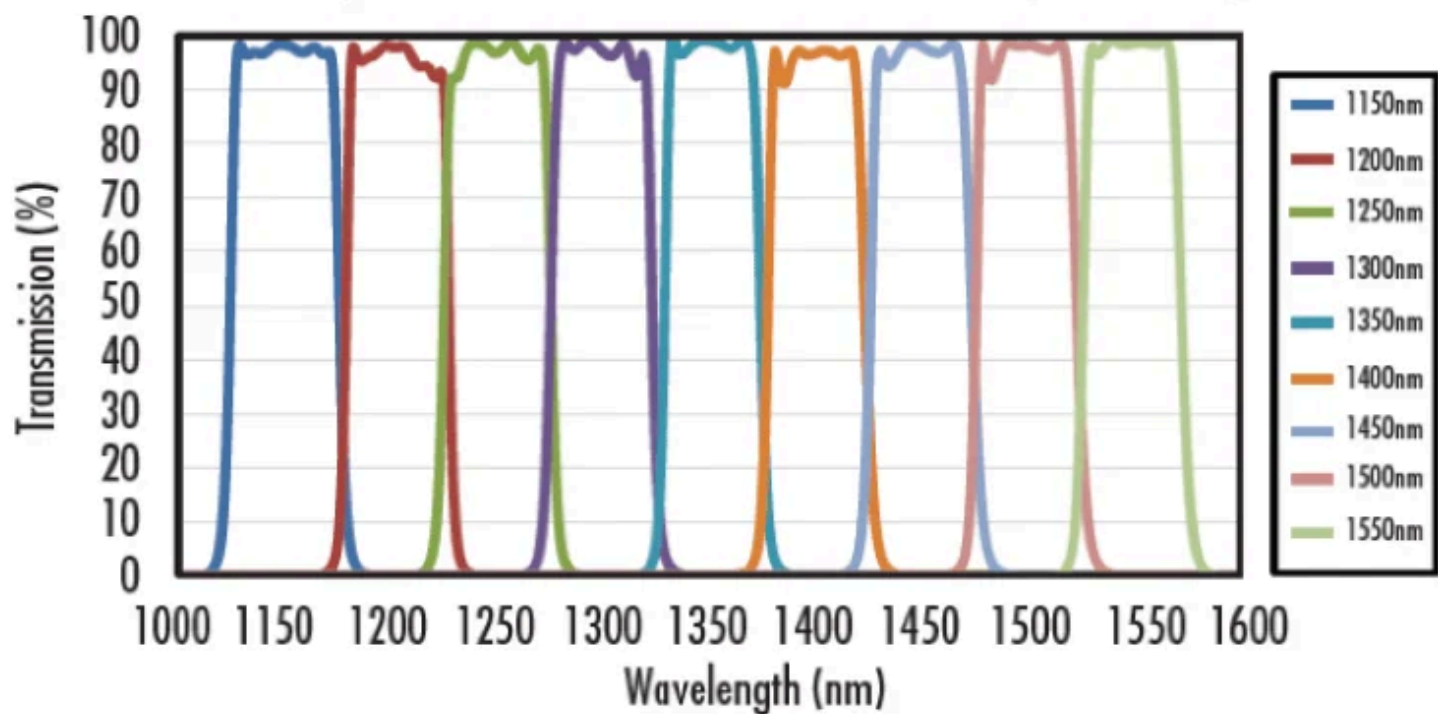

May 29, 2026

Stock No.	Description
88-301	NIR (750-1100nm) OD 4.0 25nm Bandpass Filter Kit, 25mm Dia




Edmund Optics certifies that all articles included in this shipment are in compliance with the terms and conditions of this order. The company also certifies that the articles included in this shipment are in accordance to all agreed upon specifications and quality assurance provisions. Please call 1-800-363-1992 should any questions arise from this shipment.

#88-301
Subject to technical modifications (29-05-2026)



Jeff Harvey- EVP of Operations

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

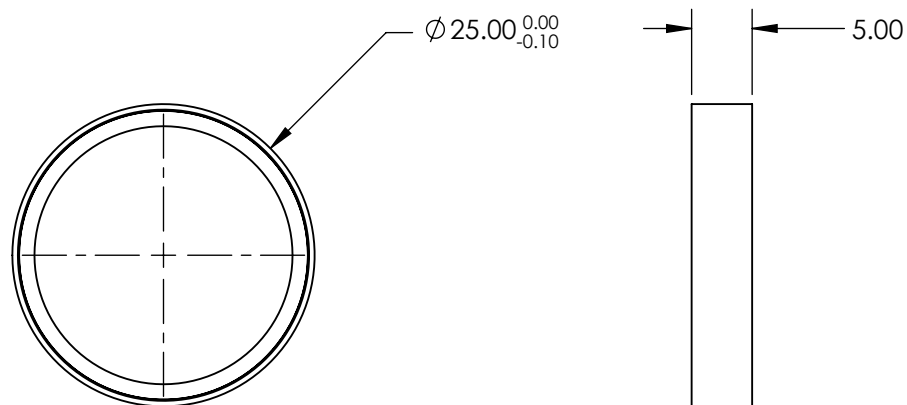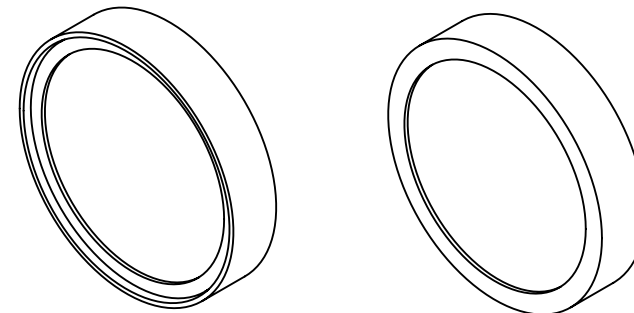

BANDPASS FILTER

REV. A	VALUE
CENTER WAVELENGTH (CWL)	750 ± 3 nm
FULL WIDTH HALF MAX (FWHM)	25 ± 3 nm
MINIMUM TRANSMISSION	≥90
BLOCKING	200 - 1200nm
SURFACE QUALITY	80-50
COATING TYPE	HARD COATED
DURABILITY	MIL-C-48497A
ENVIRONMENTAL	MIL-STD-810F

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

EO[®] Edmund Optics[®]



THIRD ANGLE
PROJECTION

TITLE

OD4, Ø25mm, 750nm x 25nm, HD BANDPASS
FILTER

ALL DIMS IN




mm

DWG NO

86659

SHEET
1 OF 1

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

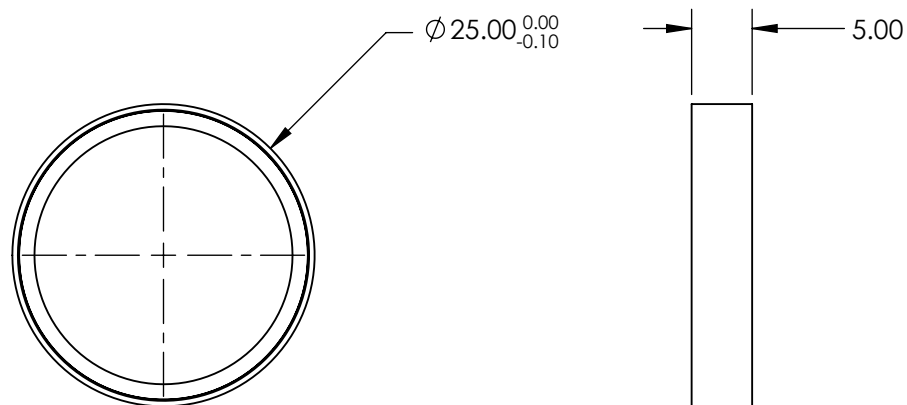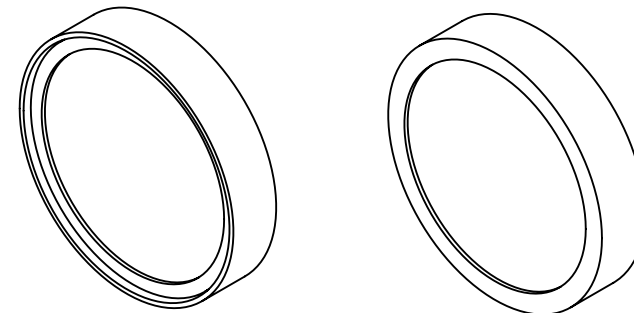

BANDPASS FILTER

REV. A	VALUE
CENTER WAVELENGTH (CWL)	800 ± 3 nm
FULL WIDTH HALF MAX (FWHM)	25 ± 3 nm
MINIMUM TRANSMISSION	≥90
BLOCKING	200 - 1200nm
SURFACE QUALITY	80-50
COATING TYPE	HARD COATED
DURABILITY	MIL-C-48497A
ENVIRONMENTAL	MIL-STD-810F

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

EO[®] Edmund Optics[®]



THIRD ANGLE
PROJECTION

TITLE

OD4, Ø25mm, 800nm x 25nm, HD BANDPASS
FILTER

ALL DIMS IN




mm

DWG NO

86660

SHEET
1 OF 1

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

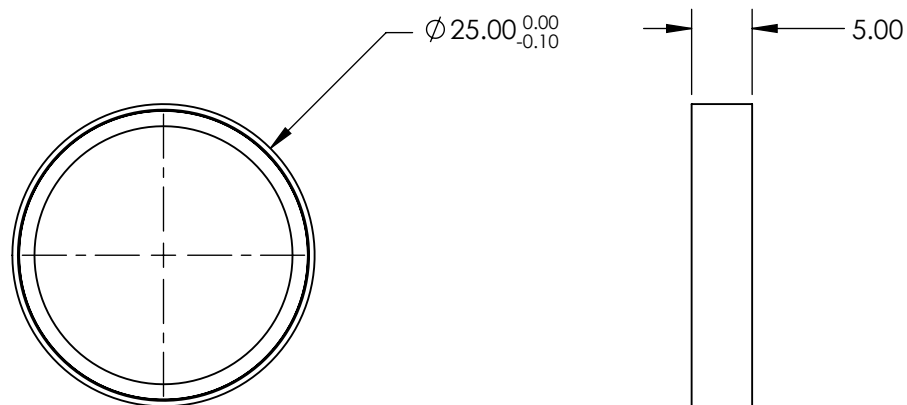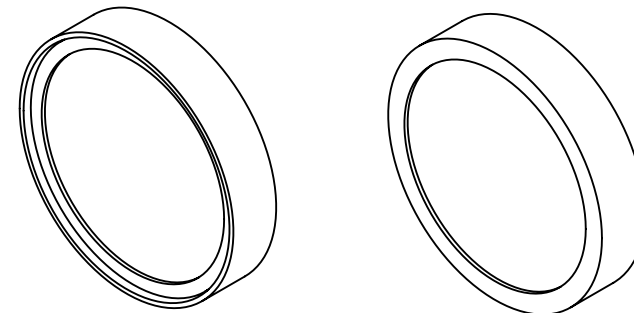

BANDPASS FILTER

REV. A	VALUE
CENTER WAVELENGTH (CWL)	850 ± 3 nm
FULL WIDTH HALF MAX (FWHM)	25 ± 3 nm
MINIMUM TRANSMISSION	≥90
BLOCKING	200 - 1200nm
SURFACE QUALITY	80-50
COATING TYPE	HARD COATED
DURABILITY	MIL-C-48497A
ENVIRONMENTAL	MIL-STD-810F

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

EO[®] Edmund Optics[®]



THIRD ANGLE
PROJECTION

TITLE

OD4, Ø25mm, 850nm x 25nm, HD BANDPASS
FILTER

ALL DIMS IN




mm

DWG NO

86661

SHEET
1 OF 1

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

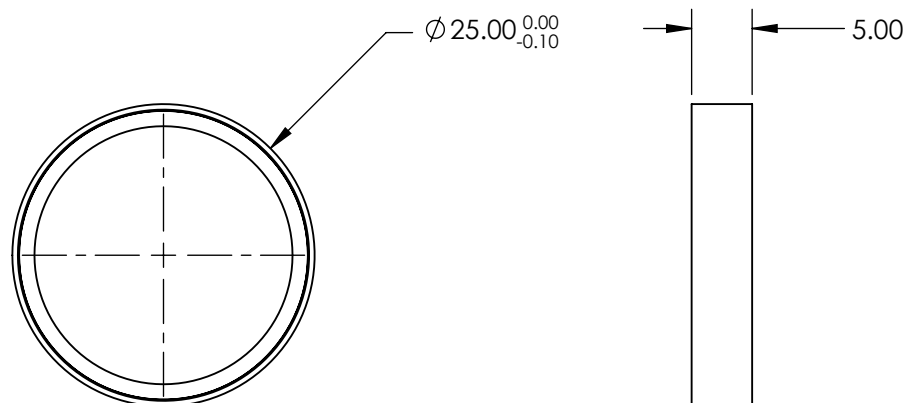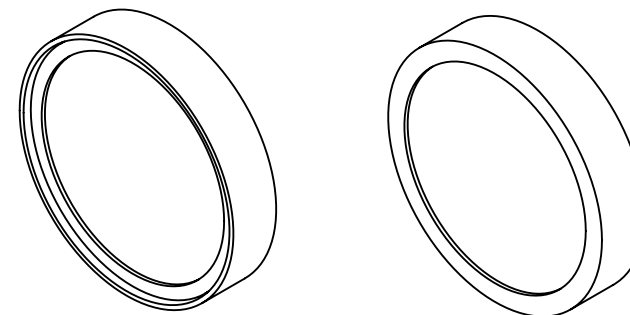

BANDPASS FILTER

REV. A	VALUE
CENTER WAVELENGTH (CWL)	900 ± 3 nm
FULL WIDTH HALF MAX (FWHM)	25 ± 3 nm
MINIMUM TRANSMISSION	≥90
BLOCKING	200 - 1200nm
SURFACE QUALITY	80-50
COATING TYPE	HARD COATED
DURABILITY	MIL-C-48497A
ENVIRONMENTAL	MIL-STD-810F

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

EO[®] Edmund Optics[®]



ALL DIMS IN mm

TITLE




OD4, Ø25mm, 900nm x 25nm, HD BANDPASS
FILTER

DWG NO

86662

SHEET
1 OF 1

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

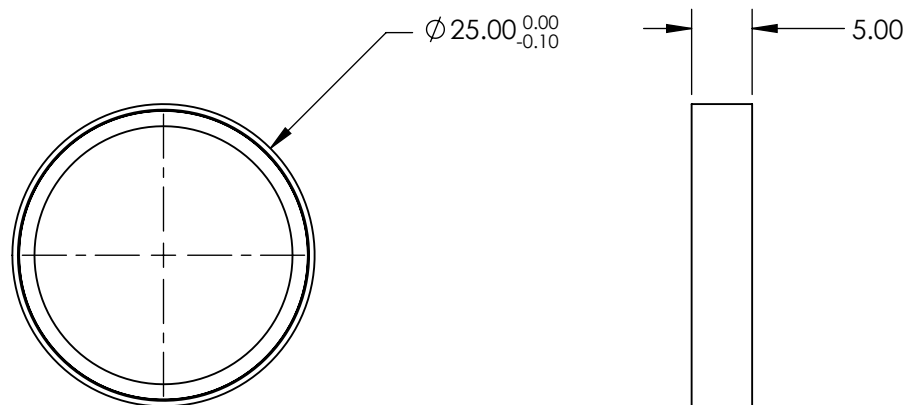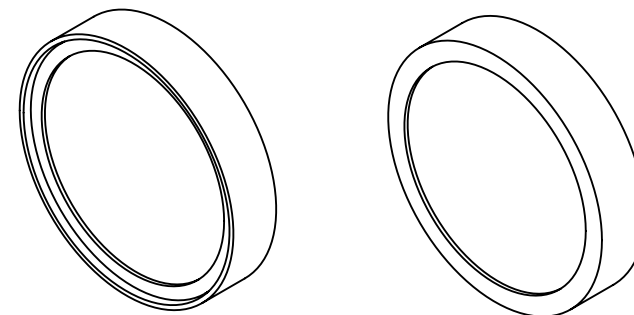

BANDPASS FILTER

REV. A	VALUE
CENTER WAVELENGTH (CWL)	950 ± 3 nm
FULL WIDTH HALF MAX (FWHM)	25 ± 3 nm
MINIMUM TRANSMISSION	≥90
BLOCKING	200 - 1200nm
SURFACE QUALITY	80-50
COATING TYPE	HARD COATED
DURABILITY	MIL-C-48497A
ENVIRONMENTAL	MIL-STD-810F

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

EO[®] Edmund Optics[®]



ALL DIMS IN

mm

TITLE




OD4, Ø25mm, 950nm x 25nm, HD BANDPASS
FILTER

DWG NO

86663

SHEET
1 OF 1

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

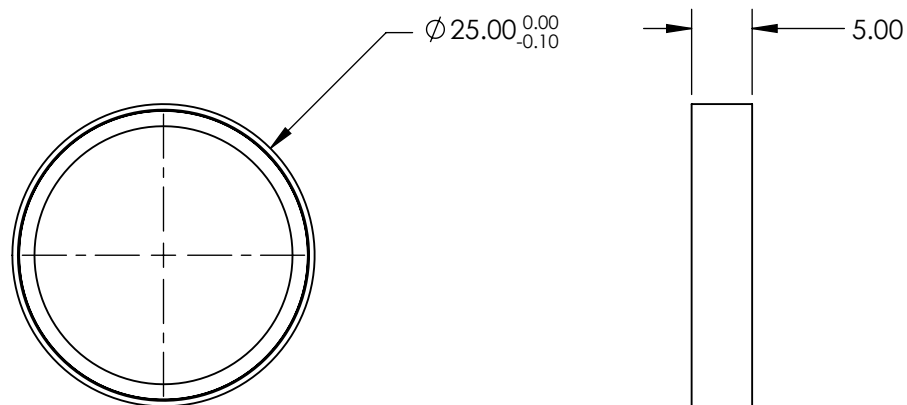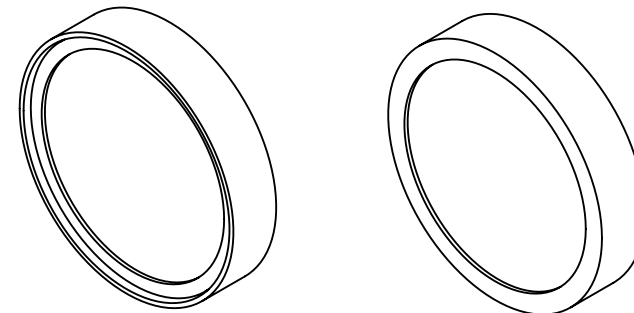

BANDPASS FILTER

REV. A	VALUE
CENTER WAVELENGTH (CWL)	1000 ± 3 nm
FULL WIDTH HALF MAX (FWHM)	25 ± 3 nm
MINIMUM TRANSMISSION	>90
BLOCKING	200 - 1500nm
SURFACE QUALITY	80-50
COATING TYPE	HARD COATED
DURABILITY	MIL-C-48497A
ENVIRONMENTAL	MIL-STD-810F

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

EO[®] Edmund Optics[®]



ALL DIMS IN mm

TITLE




OD4, Ø25mm, 1000nm x 25nm, HD BANDPASS
FILTER

DWG NO

87823

SHEET
1 OF 1

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

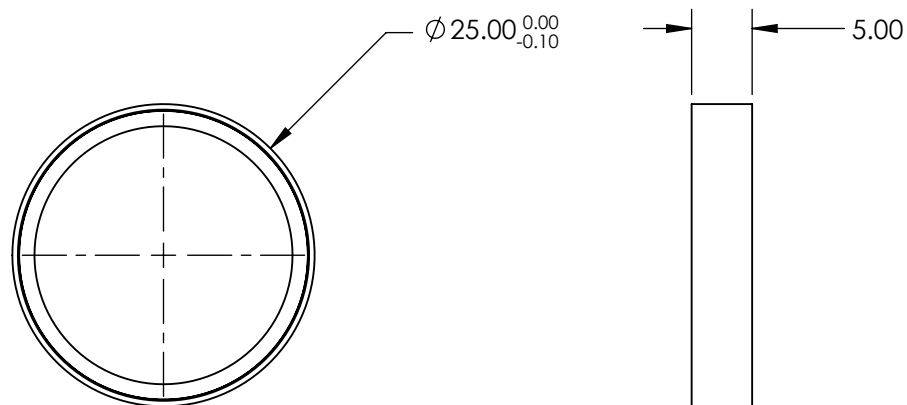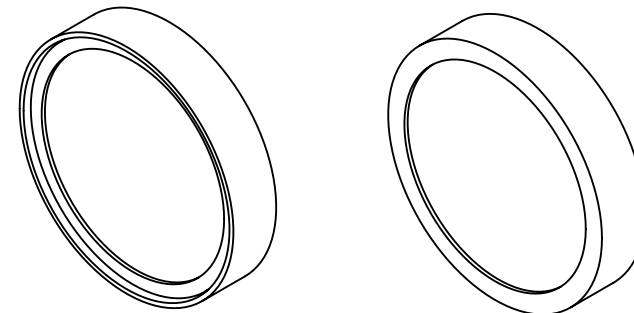

BANDPASS FILTER

REV. A	VALUE
CENTER WAVELENGTH (CWL)	1050 ± 3 nm
FULL WIDTH HALF MAX (FWHM)	25 ± 3 nm
MINIMUM TRANSMISSION	>90
BLOCKING	200 - 1500nm
SURFACE QUALITY	80-50
COATING TYPE	HARD COATED
DURABILITY	MIL-C-48497A
ENVIRONMENTAL	MIL-STD-810F

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

EO[®] Edmund Optics[®]



ALL DIMS IN

mm

TITLE




OD4, Ø25mm, 1050nm x 25nm, HD BANDPASS
FILTER

DWG NO

87824

SHEET
1 OF 1

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

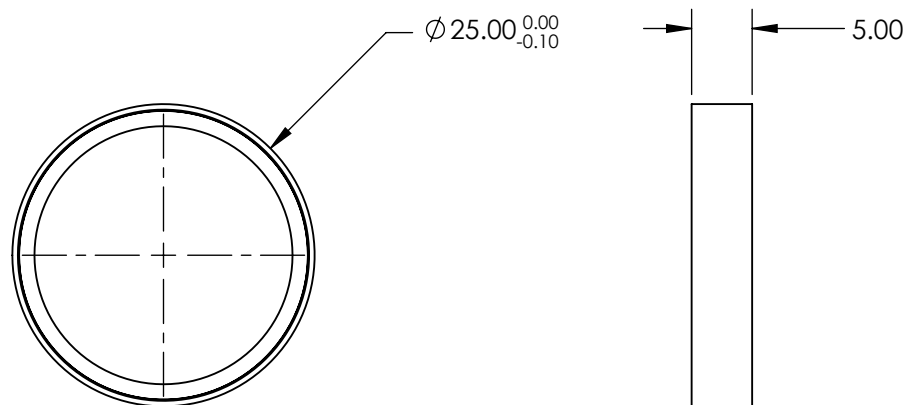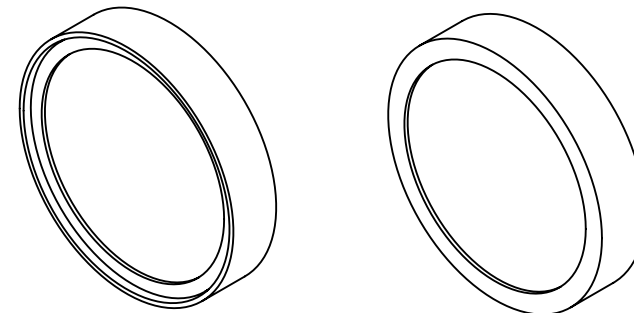

BANDPASS FILTER

REV. A	VALUE
CENTER WAVELENGTH (CWL)	1100 ± 3 nm
FULL WIDTH HALF MAX (FWHM)	25 ± 3 nm
MINIMUM TRANSMISSION	>90
BLOCKING	200 - 1500nm
SURFACE QUALITY	80-50
COATING TYPE	HARD COATED
DURABILITY	MIL-C-48497A
ENVIRONMENTAL	MIL-STD-810F

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

EO® **Edmund Optics®**



THIRD ANGLE
PROJECTION

TITLE

OD4, Ø25mm, 1100nm x 25nm, HD BANDPASS
FILTER

ALL DIMS IN

mm

DWG NO

87825

SHEET
1 OF 1