

SIEMENS

Rainproof Combination Metering

Catalog Number

MK0603S1400SCS

Enclosure

Type 3R

Device Rating: 400 Amp, Max; 120/240 Volts ~, 1 phase, 3 wire

Meter Socket Rating: 400 Amp Max, 320 Amp Continuous
Parallel Energy Source Disconnect M3: 200 Amps Max.

This panelboard is suitable for use with interconnected parallel electric power production sources and is intended for connection to utility-interactive equipment in accordance with Article 705 of the National Electrical Code®, ANSI/NFPA 70®.

M3 disconnects Parallel Energy Source but does not disconnect all power feeding this device.

Parallel Energy Source must be connected to M3 circuit breaker. M3 cannot be used as a branch breaker position for a backup (generator) power source.

For installation by Qualified Person in accordance with all local electrical codes and/or the National Electrical Code.®

Suitable Only For Use As Service Equipment.

For Overhead or Underground Service Terminals.

Suitable for 60°/75° C Copper or Aluminum Conductor.

Unused neutral branch terminals may be used to terminate equipment grounding wires in the combinations indicated for equipment ground bar terminals.

Service Disconnect Barriers may be required to cover the solar input circuit breaker lugs. Use ECLX387HD for QP type breakers or ECLTB3 for QN type breakers.

General Information

Remove twistouts from trim only where breakers will be installed.

All openings must be filled with breakers or filler plates.

Circuit breaker trip position is indicated by handle position midway between ON and OFF.

To reset, move handle to OFF position then turn ON.

Line Terminals:

Provisions for UL listed NEMA mounting terminals.

Compression terminals to #750 kcmil,

single conductor, ILSCO type 2ACL.

See lug manufacturer's instruction sheet supplied with the connector for tool, die, and number of crimps.

Tightening Torques:

5/16" Nuts(1/2" Drive).....130-140 in-lbs

3/8" Nuts(9/16" Drive).....240-260 in-lbs

1/2" Nuts(3/4" Drive)490-540 in-lbs

Manual Bypass Nut

Torque 35-40 in-lbs

Load, Neutral and Ground Terminals

Terminal	Wire Size	Torque
A, B, N		
SUK350TA	(2) #6-350 kcmil	275 lb-in
SUK600TA	#2-600 kcmil	375 lb-in
SUK1000TA	500-1000 kcmil	500 lb-in
N1	300 kcmil - #4	250 lb-in
G1	#2 - #14	50 lb-in
G2	ECLK2N	2/0 - 4 AWG 110 lb-in
	ECLK3N	300kcmil-4 AWG 250 lb-in
Branch Breaker Terminals	See Markings on Breaker	

Equipment Ground Bar


Ground Terminal Size	Wire Size	Torque
#4-#14 (ECGB5)	(1, 2 or 3) #14 CU	20 lb-in
	(1 or 2) #10-12 AL/CU	20 lb-in
	#8 AL/CU	25 lb-in
	#6 - 4 AL/CU	35 lb-in

Short Circuit Current Rating (Wattour Meter not included in short circuit rating)

This panelboard has a short circuit current rating of 22,000 Amps RMS Symmetrical, 120/240 V~. The correct Service Disconnects and Parallel Energy Source Disconnect combinations to be used for various short circuit current levels are listed in the tabulation below. Any circuit breaker installed, replaced, or added in this panelboard must be manufactured by Siemens and must be of the correct type as indicated in the tabulations below.

SERVICE DISCONNECT M1/M2 When the M1/M2 installed Service Disconnect is a Siemens Type	Then the maximum short circuit current rating in RMS Symmetrical Amperes 120/240V AC is	DISCONNECT M3 If installed, the Parallel Energy Source Disconnect must be Type
QP, QN, QNR	10,000	QP, QN
QPH, QNH, QNRH	22,000	QPH, QNH

Important: Do not allow petroleum based (hydrocarbon) sprays, chemicals, solvents or any paint to contact interior components. Petroleum based chemicals can cause degradation of electrical insulating materials.

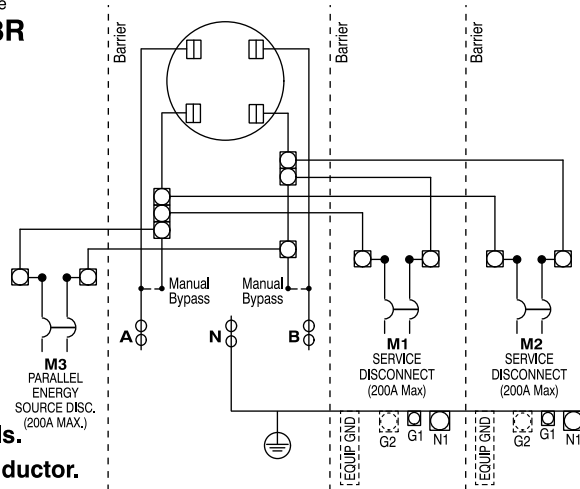

CAUTION: Circuit may be live with meter removed.

Accessories:

Filler Plate	QF3 or ECQF3
200A Main Breaker	QN2200H / QN2200RH
150A Main Breaker	QN2150H / QN2150RH
Lug #6-350 kcmil	SUK350TA
Lug #2-600 kcmil	SUK600TA
Lug 500-1000 kcmil	SUK1000TA
Flush Rail Kit	ECFRK2
Ground Bar (5 pos)	ECGB5
Lug, 2/0 AWG (G2)	ECLK2N
Lug, 300kcmil (G2)	ECLK3N
LTB KIT for QNR	ECLTB3
Main Brkr Holddown Kit	ECLX387HD

If hub is required, use Type HD catalog numbers listed below:

Trade size (in)	Catalog No.
2"	EC56854
2 1/2"	EC56855
3"	EC56856
3 1/2"	EC56857
4"	EC56858
Closure Plate	EC56933S