

SUBMITTAL – ASUH12KPAS

Job Name: _____

Date: _____

Location: _____

R32

Indoor Unit: **ASUH12KPAS**



FEATURES

INDOOR UNIT:

- Compact wall-mounted indoor unit delivering superior comfort and energy-efficient performance
- Indoor unit with ProCore™ (High Corrosion Resistant Copper) coils for long-lasting protection against corrosion
- Whisper-quiet operation with sound levels as low as 19dB
- Multiple fan speed options; Auto, High, Med-High, Med, Med-Low, Low, and Quiet.
- Special Operation modes available:
 - Economy Mode / Energy Saving Mode / Powerful Mode / Minimum Heat Mode / Automatic defrosting operation / Auto-restart function
- Enhanced controls platform for seamless, intuitive operation:
 - Backlit wireless remote controller with luminous buttons for easy visibility, included with the indoor unit
 - Wi-Fi connectivity with Airstage Mobile App monitoring via compatible USB WLAN adapter
 - Extended connectivity with support for third-party interface options
 - Compatible with BACnet and Modbus protocols for seamless integration with building management and Home Automation Systems
- Advanced scheduling and timer options offer greater control over unit operation:
 - Weekly Timer / 24-hr Timer / Sleep Function
- Dual-action Filtration: Apple-Catechin Filter & Ion Deodorizing Filter
- Additional premium features include, but are not limited to:
 - Built-in external input and output for interlocking systems with 3rd party devices (Ex: Fire Alarm, Door Switch, Humidifier, Aux. Heat & more)
 - Multiple Auxiliary Heat logic for optimized heating performance
 - Service monitoring functionality via compatible accessories (UTY-RVRU & UTY-RNRUZ-series)



7 Year Compressor, 5 Year Parts out-of-the-box Warranty.



10 Year Compressor, 10 Year Parts Warranty when registered within 60 days of installation in a residence.



12 Year Compressor, 12 Year Parts Warranty when registered within 60 days of installation in a residence and installed by a Fujitsu Elite contractor.



Due to continuous product improvements, specifications are subject to change without notice. Please log in to the Fujitsu Portal for the most up-to-date documentation <https://connect.fujitsugeneral.com>

SUBMITTAL – ASUH12KPAS

SPECIFICATIONS:

Indoor Unit					ASUH12KPAS			
Nominal Capacity				Btu/h	12,000			
Indoor Dimensions (H × W × D)		Net		in (mm)	10-5/8 × 32-13/16 × 8-3/4 (270 × 834 × 222)			
		Gross		in (mm)	10-7/8 × 36 × 13-1/16 (277 × 914 × 332)			
Indoor Weight		Net		lb (kg)	21 (9.5)			
		Gross			26 (12.0)			
Indoor Fan	Airflow rate	Cooling	High	CFM (m³/h)	412 (700)			
			Med-High		371 (630)			
			Med		330 (560)			
			Med-Low		288 (490)			
			Low		253 (430)			
			Quiet		159 (270)			
		Heating	High		453 (770)			
			Med-High		406 (690)			
			Med		377 (640)			
			Med-Low		341 (580)			
			Low		306 (520)			
			Quiet		194 (330)			
		Type × Qty				Crossflow fan x 1		
		Motor output			W	30		
Indoor Sound Pressure Level ^{*1}		Cooling	High	dB (A)	40			
			Med-High		38			
			Med		34			
			Med-Low		32			
			Low		29			
			Quiet		21			
		Heating	High		42			
			Med-High		39			
			Med		36			
			Med-Low		35			
			Low		31			
			Quiet		22			
Connection Pipe		Size	Liquid	in (mm)	Ø1/4 (Ø6.35)			
			Gas		Ø3/8 (Ø9.52)			
		Method				Flare		
Indoor Drain hose		Material			Polypropylene + High-density polyethylene			
		Tip Diameter		in (mm)	I.D.: Ø17/32 (Ø13.8), O.D.: Ø19/32 to Ø21/32 (Ø15.0 to Ø16.8)			
Indoor Operation range		Cooling		°F (°C)	64 to 90 (18 to 32)			
		Heating		%RH	80 or less			
System power supply		Voltage		V	208/230			
		Frequency		Hz	60			
		Available voltage range		V	187—253			
MCA ^{*2}				A	0.44/0.44			
Indoor Input Power		W			21.8			

NOTES:

Indoor Sound Pressure Level:

- Measured values in manufacturer's anechoic chamber.
- Because of the surrounding sound environment, the sound levels measured in actual installation conditions might be higher than the specified values here.

MCA:

- Minimum Circuit Ampacity (Calculation based on UL60335-2-40)

SUBMITTAL – ASUH12KPAS

ACCESSORIES:

Model Number	Description
UTY-RVRU ^{*1}	KAGAMI - Touch Panel Wired Controller
UTY-RNRUZ5 ^{*1}	Touch Panel Wired Remote Controller
UTY-RHRY ^{*1}	Simple Wired Remote (Without Mode Function) - Hospitality
UTY-RSRY ^{*1}	Simple Wired Remote (With Mode Function)
UTY-TWRXZ2	Communication Kit - Wall Mount
UTY-TFSXH4	Wi-Fi Adapter (WiFi Interface Module USB Type)
FJ-AC-WIFI-1	Intesis Wi-Fi Device: Wired Module
FJ-IR-WIFI-1NA	Intesis IR Wireless AC Cloud Control Interface (Intesis Home app)
BM101WA	Cielo - Breez Max IR Controller w/ WiFi (Black)
BM102WA	Cielo - Breez Max IR Controller w/ WiFi (White)
UTY-VMSX	Modbus Converter
UTY-VTGX ^{*1}	Network Converter - Convert H-Series Comm. Protocol to V/J-Series Comm.
FJ-AC-485-1	Intesis - BACnet MSTP & Modbus RTU Gateway
UTY-TERX ^{*1}	External Switch Controller
UTY-TTRXZ1 ^{*1, 2}	24V Thermostat Interface
TTRXZ1-KIT ^{*1, 2}	24V Thermostat Interface Kit (UTY-TTRXZ1, UTY-WIFI Plug & 24V Transformer)
UTY-XCSXZ2	External input and output PCB
UTY-XWZX	External Wire Kit
UTY-XWZXZ5	External Connect Kit
UTY-DSGYZ2 ^{*3}	Airstage Edge Controller

NOTES:


*1 -Requires Communication kit UTY-TWRXZ2 to connect this device to IDU.

*2 -This device may not be used with any other type of controls (central controller, wire/wireless RC, WiFi adapter, BMS interface).

*3 -Connection to AIRSTAGE Cloud requires a compatible AIRSTAGE Mobile adapter connected to the IDU.

SUBMITTAL – ASUH12KPAS

INDOOR UNIT DIMENSIONS:

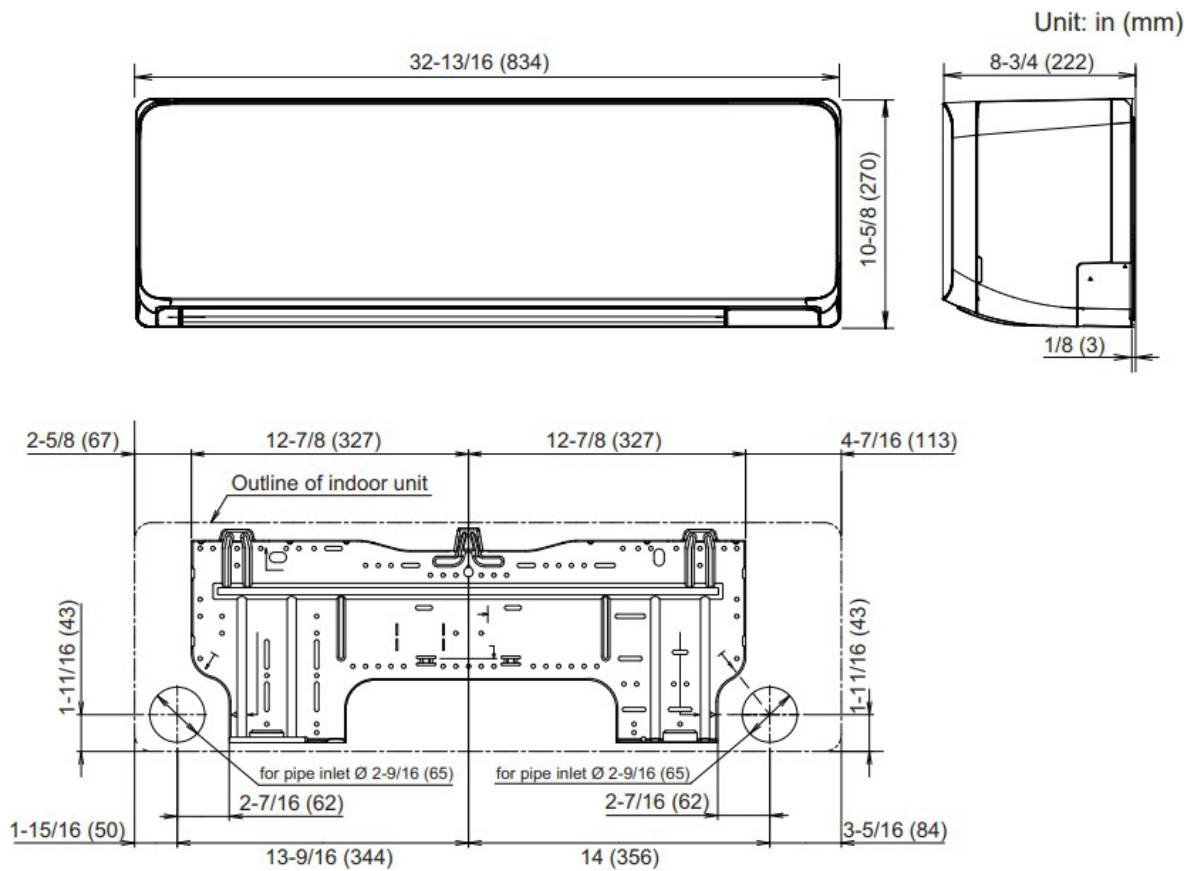

The Fujitsu logo is a worldwide trademark of Fujitsu General Limited. The Airstage logo and name is a worldwide trademark of Fujitsu General Limited and is a registered trademark in Japan, the USA and other countries or areas. Copyright 2024 Fujitsu General America, Inc. Fujitsu's products are subject to continuous improvements. Fujitsu reserves the right to modify product design, specifications and information in this brochure without notice and without incurring any obligations.

SUBMITTAL - 12KPAS1

Job Name: _____

Date: _____

Location: _____

R32

Indoor Unit: **ASUH12KPAS**

Outdoor Unit: **AOUH12KPAS1**



FEATURES

INDOOR UNIT:

- Compact wall-mounted indoor unit delivering superior comfort and energy-efficient performance
- Indoor unit with ProCore™ (High Corrosion Resistant Copper) coils for long-lasting protection against corrosion
- Whisper-quiet operation with sound levels as low as 19dB
- Multiple fan speed options; Auto, High, Med-High, Med, Med-Low, Low, and Quiet.
- Special Operation modes available:
 - Economy Mode / Energy Saving Mode / Powerful Mode / Minimum Heat Mode / Automatic defrosting operation / Auto-restart function
- Enhanced controls platform for seamless, intuitive operation:
 - Backlit wireless remote controller with luminous buttons for easy visibility, included with the indoor unit
 - Wi-Fi connectivity with Airstage Mobile App monitoring via compatible USB WLAN adapter
 - Extended connectivity with support for third-party interface options
 - Compatible with BACnet and Modbus protocols for seamless integration with building management and Home Automation Systems
- Advanced scheduling and timer options offer greater control over unit operation:
 - Weekly Timer / 24-hr Timer / Sleep Function
- Dual-action Filtration: Apple-Catechin Filter & Ion Deodorizing Filter
- Additional premium features include, but are not limited to:
 - Built-in external input and output for interlocking systems with 3rd party devices (Ex: Fire Alarm, Door Switch, Humidifier, Aux. Heat & more)
 - Multiple Auxiliary Heat logic for optimized heating performance
 - Service monitoring functionality via compatible accessories (UTY-RVRU & UTY-RNRUZ-series)

OUTDOOR UNIT FEATURES

- Low GWP R-32 systems for reduced environmental impact
- INVERTER-driven compressor that offers superior performance, comfort, and energy savings
- Compact outdoor unit with extended line set lengths up to 66ft (20m)
- Up to 16% higher rated heating capacity than nominal capacity
- Low-noise outdoor unit operation mode
- Hydro Fin-coated heat exchanger for improved corrosion resistance and coil durability



7 Year Compressor, 5 Year Parts out-of-the-box Warranty.



10 Year Compressor, 10 Year Parts Warranty when registered within 60 days of installation in a residence.



12 Year Compressor, 12 Year Parts Warranty when registered within 60 days of installation and installed by a Fujitsu Elite contractor.



Due to continuous product improvements, specifications are subject to change without notice. Please log in to the Fujitsu Portal for the most up-to-date documentation <https://connect.fujitsugeneral.com>

Version: 20250409A

-1 of 6-

SUBMITTAL - 12KPAS1

SPECIFICATIONS:

Indoor Unit				ASUH12KPAS			
Outdoor Unit				AOUH12KPAS1			
System Name				12KPAS1			
AHRI Number				215212610			
SEER2		Cooling		Btu/hW	24		
EER2					11.7		
HSPF 2 (IV) / HSPF 2 (V)		Heating		kW/kW	10.5 / 7.9		
COP2					3.8		
Outdoor Operation Range		Cooling		°F (°C)	14 to 122* ⁸ (-10 to 50* ⁸)		
		Heating			5 to 75 (-15 to 24)		
Indoor Capacity		Cooling		Btu/h	12000		
					Min.—Max.	3,100—13,600	
		Heating	47°FDB (Outdoor temp.)		Rated	14000	
					Min.—Max.	2,700—17,000	
			17°FDB (Outdoor temp.) ^{*1}		Rated	8700	
					Max.	11000	
			5°FDB (Outdoor temp.) ^{*2}		Rated	8500	
					Max.		
Outdoor Connection pipe		Liquid		in (mm)	Ø1/4 (Ø6.35)		
		Gas			Ø3/8 (Ø9.52)		
		Method		FLARE			
		Pre-charge length		ft (m)	49 (15)		
		Min. length			10 (3)		
		Max. length			66 (20)		
		Max. height difference			49 (15)		
Indoor Dimensions (H × W × D)		Net		in (mm)	10-5/8 × 32-13/16 × 8-3/4 (270 × 834 × 222)		
		Gross			10-7/8 × 36 × 13-1/16 (277 × 914 × 332)		
Indoor Weight		Net		lb (kg)	21 (9.5)		
		Gross			26 (12.0)		
Outdoor Dimensions (H × W × D)		Net		in (mm)	21-5/16 × 26-1/8 × 11-7/16 (541 × 663 × 290)		
		Gross			23-11/16 × 31-5/8 × 14-3/4 (602 × 804 × 375)		
Outdoor Weight		Net		lb (kg)	57 (26)		
		Gross			62 (28)		
Indoor Fan		Cooling		CFM (m³/h)	High	430 (730)	
					Med—High	365 (620)	
					Med	318 (540)	
					Med—Low	283 (480)	
					Low	247 (420)	
					Quiet	153 (260)	
		Heating			High	436 (740)	
					Med—High	394 (670)	
					Med	365 (620)	
					Med—Low	330 (560)	
					Low	300 (510)	
					Quiet	188 (320)	
		Type × Qty			CROSSFLOW FAN × 1		
		Motor output			W		30
Outdoor Fan		Airflow rate		CFM (m³/h)	959 (1,630)		
					Heating	818 (1,390)	
		Type × Qty		PROPELLER FAN × 1			
Indoor Sound Pressure Level ^{*4}		Motor output		dB (A)	W	23	
		Cooling			High	42	
					Med—High	38	
					Med	34	
					Med—Low	32	
					Low	29	
					Quiet	19	
		Heating			High	42	
					Med—High	39	
					Med	38	
					Med—Low	35	
					Low	33	
					Quiet	21	
		Outdoor Sound Pressure Level ^{*4}			Cooling		48
Heating							

SUBMITTAL - 12KPAS1

SPECIFICATIONS:

Outdoor Refrigerant		Type		R32	
		Charge	lb oz	1 lb 9 oz	
			g	700	
Additional Charge Calculation			oz/ft	0.22	
			g/m	20	
Outdoor Refrigerant Oil		Type		RB74AF	
		Amount	in ³ (cm ³)	14.6 (240)	
Indoor Moisture removal			pints/h (L/h)	3.40 (1.59)	
Indoor Drain hose		Material		POLYPROPYLENE + HIGH-DENSITY POLYETHYLENE	
		Tip Diameter	in (mm)	I.D.: Ø17/32 (Ø13.8), O.D.: Ø19/32 to Ø21/32 (Ø15.0 to Ø16.8)	
Indoor Operation range		Cooling	°F (°C)	64 to 90 (18 to 32)	
			%RH	80 or less	
		Heating	°F (°C)	60 to 86 (16 to 30)	
Power Supply				208/230 V~ 60 Hz	
Available Voltage Range				187—253	
System power supply		Voltage		V	
		Frequency		Hz	
		Available voltage range		V	
Indoor Current	Cooling		A	4.8	
	Heating			5	
Maximum Operating Current* ³				Cooling	6.9
				Heating	7.9
Outdoor Starting Current				5	
MCA* ⁵				9.7	
Wiring spec.* ⁶		MAX. CKT. BKR* ⁷		15	
Indoor Input Power	Cooling			Rated	1.03
			Min.—Max.	0.13—1.35	
	Heating	Rated	1.08		
		Min.—Max.	0.13—1.43		
		Rated	0.89		
		Max.	1.2		
		Rated	1.095		
		Max.			
Indoor Power Factor		Cooling		93.3	
		Heating		93.9	
Energy Star* ⁹				ES	

NOTES

- Cooling: Indoor temperature of 80°F (26.67°CDB)/67°FWB (19.44°CWB), and outdoor temperature of 95°FDB (35°CDB)/75°FWB (23.9°CWB).
- Heating: Indoor temperature of 70°FDB (21.11°CDB)/60°FWB (15.56°CWB), and outdoor temperature of 47°FDB (8.33°CDB)/43°FWB (6.11°CWB).
- 17°FDB (Outdoor temp.) —*1: Heating (17°F): Indoor temperature of 70°FDB (21.11°CDB)/60°FWB (15.56°CWB), and outdoor temperature of 17°FDB (-8.33°CDB)/15°FWB (-9.44°CWB).
- 5°FDB (Outdoor temp.) —*2: Heating (5°F): Indoor temperature of 70°FDB (21.11°CDB)/60°FWB (15.56°CWB), and outdoor temperature of 5°FDB (-15.0°CDB)/4°FWB (-15.56°CWB).
- Test conditions are based on AHRI 210/240 2023.
- *4:
- Indoor Sound Pressure Level —Measured values in manufacturer's anechoic chamber.
- Outdoor Sound Pressure Level —Because of the surrounding sound environment, the sound levels measured in actual installation conditions might be higher than the specified values here.
- *3:
- Maximum Operating Current —Maximum current is maximum value when operated within the operation range.
- The total current of indoor unit and outdoor unit.
- MCA —*5: Minimum Circuit Ampacity (Calculation based on UL60335-2-40)
- Wiring spec. —*6: Selected sample based on Japan Electrotechnical Standards and Codes Committee E0005.
- As the regulations of wire size and circuit breaker differ in each country or region, select appropriate devices complied to the regional standard.
- MAX. CKT. BKR —*7: Maximum Circuit Breaker
- Operation Range —*8: Suction temperature of the outdoor unit.
- System continues to operate below rated outdoor operation temperature range, subject to varying conditions. System has no low temperature cut out. Capacity is not tested outside of the rated temperature range.
- MAX. CKT. BKR —*7: Maximum Circuit Breaker
- Operation Range —*8: Suction temperature of the outdoor unit.
- Energy Star —*9: ES = Energy Star, ESCC = Energy Star Cold Climate, ESME = Energy Star Most Efficient.
- System continues to operate below rated outdoor operation temperature range, subject to varying conditions. System has no low temperature cut out. Capacity is not tested outside of the rated temperature range.

SUBMITTAL - 12KPAS1

ACCESSORIES:

Model Number	Description
UTY-RVRU ^{*1}	KAGAMI - Touch Panel Wired Controller
UTY-RNRUZ5 ^{*1}	Touch Panel Wired Remote Controller
UTY-RHRY ^{*1}	Simple Wired Remote (Without Mode Function) - Hospitality
UTY-RSRY ^{*1}	Simple Wired Remote (With Mode Function)
UTY-TWRXZ2	Communication Kit - Wall Mount
UTY-TFSXH4	Wi-Fi Adapter (WiFi Interface Module USB Type)
FJ-AC-WIFI-1	Intesis Wi-Fi Device: Wired Module
FJ-IR-WIFI-1NA	Intesis IR Wireless AC Cloud Control Interface (Intesis Home app)
BM101WA	Cielo - Breez Max IR Controller w/ WiFi (Black)
BM102WA	Cielo - Breez Max IR Controller w/ WiFi (White)
UTY-VMSX	Modbus Converter
UTY-VTGX ^{*1}	Network Converter - Convert H-Series Comm. Protocol to V/J-Series Comm.
FJ-AC-485-1	Intesis - BACnet MSTP & Modbus RTU Gateway
UTY-TERX ^{*1}	External Switch Controller
UTY-TTRXZ1 ^{*1, 2}	24V Thermostat Interface
TTRXZ1-KIT ^{*1, 2}	24V Thermostat Interface Kit (UTY-TTRXZ1, UTY-WIFI Plug & 24V Transformer)
UTY-XCSXZ2	External input and output PCB
UTY-XWZX	External Wire Kit
UTY-XWZXZ5	External Connect Kit
UTY-DSGYZ2 ^{*3}	Airstage Edge Controller

NOTES:


*1 -Requires Communication kit UTY-TWRXZ2 to connect this device to IDU.

*2 -This device may not be used with any other type of controls (central controller, wire/wireless RC, WiFi adapter, BMS interface).

*3 -Connection to AIRSTAGE Cloud requires a compatible AIRSTAGE Mobile adapter connected to the IDU.

SUBMITTAL - 12KPAS1



INDOOR UNIT DIMENSIONS:

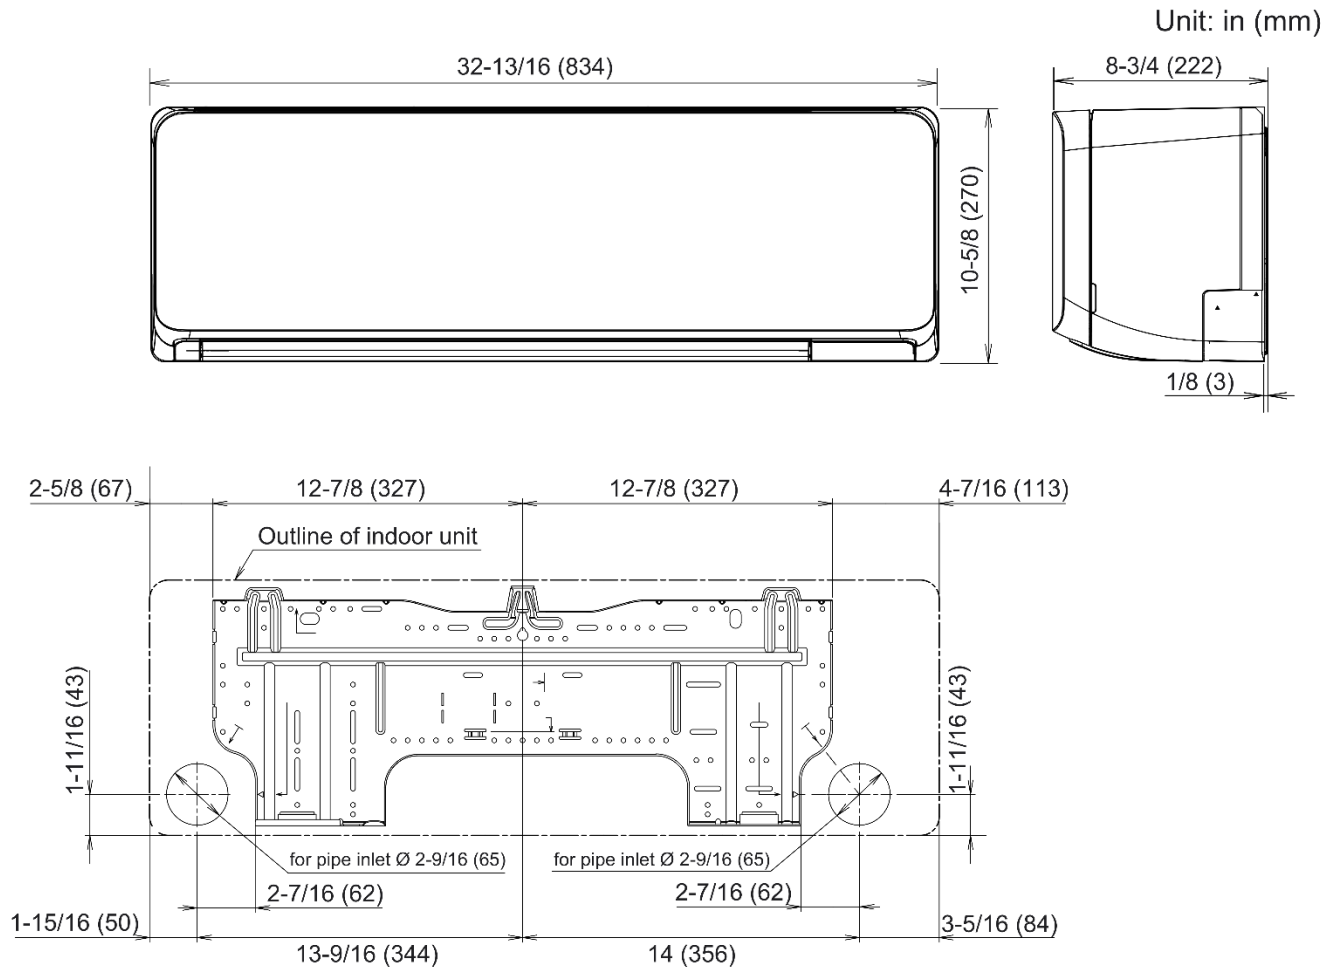

SUBMITTAL - 12KPAS1

OUTDOOR UNIT DIMENSIONS:

Unit: in (mm)

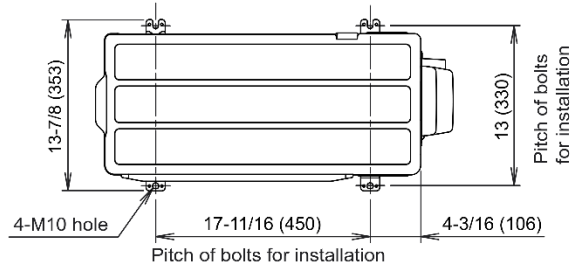

Side view

