ical Config CLI Attributes

IOS Command Line Interface

```
uter>en
uter#conf t
ter configuration commands, one per line.  End with CNTL/Z.
uter(config)#hostname ISP
SP(config)#username habiba secret 123
SP(config)#enable secret 222
SP(config)#line console 0
SP(config-line)#login local
SP(config-line)#do wr
uilding configuration...
OK]
SP(config-line)#ex
% Ambiguous command: "ex"
ISP(config-line)#do wr
Building configuration...
[OK]
ISP(config-line)#exit
ISP(config)#do wr
Building configuration...
[OK]
ISP(config)#ip domain name habiba.com
ISP(config)#crypto key generate rsa
The name for the keys will be: ISP.habiba.com
Choose the size of the key modulus in the range of 360 to 2048 for your
  General Purpose Keys. Choosing a key modulus greater than 512 may take
  a few minutes.

How many bits in the modulus [512]:
% Generating 512 bit RSA keys, keys will be non-exportable...[OK]

ISP(config)#line vty 0 4
*Mar 1 0:5:10.268: RSA key size needs to be at least 768 bits for ssh version 2
*Mar 1 0:5:10.268: %SSH-5-ENABLED: SSH 1.5 has been enabled
ISP(config-line)#transport input ssh
ISP(config-line)#login local
```

Ctrl+F6 to exit CLI focus

Copy Paste

Top

Physical Config CLI Attributes

IOS Command Line Interface

```
The name for the keys will be: ISP.habiba.com
Choose the size of the key modulus in the range of 360 to 2048 for your
  General Purpose Keys. Choosing a key modulus greater than 512 may take
  a few minutes.

How many bits in the modulus [512]:
% Generating 512 bit RSA keys, keys will be non-exportable...[OK]

ISP(config)#line vty 0 4
*Mar 1 0:5:10.268: RSA key size needs to be at least 768 bits for ssh version 2
*Mar 1 0:5:10.268: %SSH-5-ENABLED: SSH 1.5 has been enabled
ISP(config-line)#transport input ssh
ISP(config-line)#login local
ISP(config-line)#exit
ISP(config)#do wr
Building configuration...
[OK]
ISP(config)#int g0/0
ISP(config-if)#ip add 182.0.0.1 255.255.255.0
ISP(config-if)#no sh

ISP(config-if)#
%LINK-5-CHANGED: Interface GigabitEthernet0/0, changed state to up

ISP(config-if)#ex
ISP(config)#int g0/1
ISP(config-if)#ip add 162.0.0.1 255.255.255.0
ISP(config-if)#no sh

ISP(config-if)#
%LINK-5-CHANGED: Interface GigabitEthernet0/1, changed state to up

ISP(config-if)#ex
ISP(config)#
ISP(config)#
```

Ctrl+F6 to exit CLI focus

Copy Paste

Top

Router0

Physical Config CLI Attributes

IOS Command Line Interface

```
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/1, changed state to up


User Access Verification

Username: habiba
Password:

ISP>en
Password:
ISP#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
ISP(config)#route ospf 1
ISP(config-router)#network 182.0.0.0 0.0.0.255 area 0
ISP(config-router)#network 162.0.0.0 0.0.0.255 area 0
ISP(config-router)#
01:40:26: %OSPF-5-ADJCHG: Process 1, Nbr 192.168.1.1 on GigabitEthernet0/0 from LOADING to FULL,
Loading Done

01:40:30: %OSPF-5-ADJCHG: Process 1, Nbr 172.0.0.1 on GigabitEthernet0/1 from LOADING to FULL,
Loading Done

ISP(config-router)#do wr
Building configuration...
[OK]
ISP(config-router)#exit
ISP(config)#do wr
Building configuration...
[OK]
ISP(config)#
ISP(config)#
```

Ctrl+F6 to exit CLI focus

Copy Paste

Config CLI Attributes

IOS Command Line Interface

```
>en
#conf t
configuration commands, one per line.  End with CNTL/Z.
(config)#hostname cairo
(config)#username habiba secret 123
(config)#enable secret 222
(config)#line console 0
(config-line)#login local
(config-line)#do wr
ding configuration...

o(config-line)#ex
biguous command: "ex"
o(config-line)#do wr
ding configuration...
]
ro(config-line)#exit
ro(config)#do wr
lding configuration...
]
iro(config)#ip domain name habiba.com
iro(config)#crypto key generate rsa
e name for the keys will be: cairo.habiba.com
oose the size of the key modulus in the range of 360 to 2048 for your
General Purpose Keys. Choosing a key modulus greater than 512 may take
a few minutes.

ow many bits in the modulus [512]:
Generating 512 bit RSA keys, keys will be non-exportable...[OK]

cairo(config)#line vty 0 4
*Mar 1 0:13:13.540: RSA key size needs to be at least 768 bits for ssh version 2
*Mar 1 0:13:13.540: %SSH-5-ENABLED: SSH 1.5 has been enabled
cairo(config-line)#transport input ssh
```

trl+F6 to exit CLI focus

Copy Paste

Top

Config CLI Attributes

IOS Command Line Interface

```
many bits in the modulus [512]:
nerating 512 bit RSA keys, keys will be non-exportable...[OK]

ro(config)#line vty 0 4
r 1 0:13:13.540: RSA key size needs to be at least 768 bits for ssh version 2
r 1 0:13:13.540: %SSH-5-ENABLED: SSH 1.5 has been enabled
ro(config-line)#transport input ssh
ro(config-line)#login local
ro(config-line)#ex
mbiguous command: "ex"
ro(config-line)#exit
iro(config)#do wr
ilding configuration...
K]
iro(config)#int g0/0
iro(config-if)#ip add 182.0.0.2 255.255.255.0
iro(config-if)#no sh

airo(config-if)#
LINK-5-CHANGED: Interface GigabitEthernet0/0, changed state to up

airo(config-if)#exit
airo(config)#int g0/1
airo(config-if)#ip add 192.168.1.1 255.255.255.0
airo(config-if)#no sh

cairo(config-if)#
%LINK-5-CHANGED: Interface GigabitEthernet0/1, changed state to up

cairo(config-if)#ex
cairo(config)#
cairo(config)#do wr
Building configuration...
[OK]
cairo(config)#
```

Ctrl+F6 to exit CLI focus

Copy Paste

Top

Config CLI Attributes

IOS Command Line Interface

```
>en
:#conf t
 configuration commands, one per line.  End with CNTL/Z.
:(config)#hostname cairo
(config)#username habiba secret 123
(config)#enable secret 222
(config)#line console 0
(config-line)#login local
(config-line)#do wr
ding configuration...

o(config-line)#ex
biguous command: "ex"
o(config-line)#do wr
ding configuration...
]
ro(config-line)#exit
ro(config)#do wr
lding configuration...
]
iro(config)#ip domain name habiba.com
iro(config)#crypto key generate rsa
e name for the keys will be: cairo.habiba.com
oose the size of the key modulus in the range of 360 to 2048 for your
 General Purpose Keys. Choosing a key modulus greater than 512 may take
 a few minutes.

ow many bits in the modulus [512]:
 Generating 512 bit RSA keys, keys will be non-exportable...[OK]

:airo(config)#line vty 0 4
*Mar 1 0:13:13.540: RSA key size needs to be at least 768 bits for ssh version 2
*Mar 1 0:13:13.540: %SSH-5-ENABLED: SSH 1.5 has been enabled
cairo(config-line)#transport input ssh
```

Ctrl+F6 to exit CLI focus

Copy Paste

Top

Config CLI Attributes

IOS Command Line Interface

```
many bits in the modulus [512]:
nerating 512 bit RSA keys, keys will be non-exportable...[OK]

ro(config)#line vty 0 4
: 1 0:13:13.540: RSA key size needs to be at least 768 bits for ssh version 2
r 1 0:13:13.540: %SSH-5-ENABLED: SSH 1.5 has been enabled
ro(config-line)#transport input ssh
ro(config-line)#login local
ro(config-line)#ex
mbiguous command: "ex"
ro(config-line)#exit
iro(config)#do wr
ilding configuration...
K]
iro(config)#int g0/0
iro(config-if)#ip add 182.0.0.2 255.255.255.0
iro(config-if)#no sh

airo(config-if)#
LINK-5-CHANGED: Interface GigabitEthernet0/0, changed state to up

airo(config-if)#exit
airo(config)#int g0/1
airo(config-if)#ip add 192.168.1.1 255.255.255.0
airo(config-if)#no sh

cairo(config-if)#
%LINK-5-CHANGED: Interface GigabitEthernet0/1, changed state to up

cairo(config-if)#ex
cairo(config)#
cairo(config)#do wr
Building configuration...
[OK]
cairo(config)#
```

Ctrl+F6 to exit CLI focus

Copy Paste

Top

Config CLI Attributes

IOS Command Line Interface

```
config-line)#exit
(config)#do wr
ing configuration...

(config)#int g0/0
(config-if)#ip add 182.0.0.2 255.255.255.0
(config-if)#no sh

(config-if)#
K-5-CHANGED: Interface GigabitEthernet0/0, changed state to up

o(config-if)#exit
o(config)#int g0/1
o(config-if)#ip add 192.168.1.1 255.255.255.0
ro(config-if)#no sh

ro(config-if)#
NK-5-CHANGED: Interface GigabitEthernet0/1, changed state to up

iro(config-if)#ex
iro(config)#
iro(config)#do wr
ilding configuration...
OK]
airo(config)#ip dhcp pool cairo
airo(dhcp-config)#network 192.168.1.0 255.255.255.0
airo(dhcp-config)#dns
airo(dhcp-config)#dns-server 1.1.1.1
airo(dhcp-config)#de
cairo(dhcp-config)#default-router 192.168.1.1
cairo(dhcp-config)#ip dhcp ex
cairo(dhcp-config)#ip dhcp excluded-address 192.168.1.1 192.168.1.200
cairo(config)#do wr
Building configuration...
[OK]
```

Ctrl+F6 to exit CLI focus

Copy Pa

Copy to

Top

cal Config CLI Attributes

IOS Command Line Interface

```
ro>en
ssword:
iro#conf t
ter configuration commands, one per line.  End with CNTL/Z.
iro(config)#ip route 0.0.0.0 0.0.0.0 182.0.0.1
iro(config)#interface tunnel 1

iro(config-if)#
INK-5-CHANGED: Interface Tunnel1, changed state to up

airo(config-if)#ip add 100.0.0.1 255.255.255.0
airo(config-if)#tunnel source g0/0
airo(config-if)#tunnel destenation 162.0.0.2
                                  ^
 Invalid input detected at '^' marker.

cairo(config-if)#tunnel des
cairo(config-if)#tunnel destination 162.0.0.2
cairo(config-if)#
%LINEPROTO-5-UPDOWN: Line protocol on Interface Tunnel1, changed state to up

cairo(config-if)#router ospf 1
cairo(config-router)#network 100.0.0.0 0.0.0.255 area 0
cairo(config-router)#network 192.168.1.0 0.0.0.255 area 0
cairo(config-router)#do wr
Building configuration...
[OK]
cairo(config-router)#
cairo(config-router)#ex
cairo(config)#do wr
Building configuration...
[OK]
cairo(config)#
cairo(config)#
```

Ctrl+F6 to exit CLI focus

Copy Paste

Top

Config CLI Attributes

IOS Command Line Interface

```
conf t
configuration commands, one per line.  End with CNTL/Z.
(config)#rou
(config)#router ospf 1
(config-router)#net
(config-router)#network 182.0.0.0 0.0.0.255 area 0
(config-router)#network 100.0.0.0 0.0.0.255 area 0
(config-router)#network 192.168.1.0 0.0.0.255 area 0
(config-router)#do wr
ding configuration...

o(config-router)#
7:42: %OSPF-5-ADJCHG: Process 1, Nbr 172.0.0.1 on Tunnel1 from FULL to DOWN, Neighbor Down: Dead
er expired

37:42: %OSPF-5-ADJCHG: Process 1, Nbr 172.0.0.1 on Tunnel1 from FULL to DOWN, Neighbor Down:
erface down or detached

ro(config-router)#exit
iro(config)#do wr
ilding configuration...
K]
iro(config)#
:38:16: %OSPF-5-ADJCHG: Process 1, Nbr 172.0.0.1 on Tunnel1 from LOADING to FULL, Loading Done

1:38:59: %OSPF-5-ADJCHG: Process 1, Nbr 172.0.0.1 on Tunnel1 from FULL to DOWN, Neighbor Down: Dead
imer expired

01:38:59: %OSPF-5-ADJCHG: Process 1, Nbr 172.0.0.1 on Tunnel1 from FULL to DOWN, Neighbor Down:
Interface down or detached

01:39:26: %OSPF-5-ADJCHG: Process 1, Nbr 172.0.0.1 on Tunnel1 from LOADING to FULL, Loading Done
 %ADJ-5-PARENT: Midchain parent maintenance for IP midchain out of 1 65E900C0 - looped chain
attempting to stack
```

Ctrl+F6 to exit CLI focus

Copy Paste

Top Search

Physical Config CLI Attributes

IOS Command Line Interface

```
Router>en
Router#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#hostname Alex
Alex(config)#username habiba secret 123
Alex(config)#enable secret 222
Alex(config)#line console 0
Alex(config-line)#login local
Alex(config-line)#do wr
Building configuration...
[OK]
Alex(config-line)#exit
Alex(config)#do wr
Building configuration...
[OK]
Alex(config)#ip domain name habiba.com
Alex(config)#crypto key generate rsa
The name for the keys will be: Alex.habiba.com
Choose the size of the key modulus in the range of 360 to 2048 for your
  General Purpose Keys. Choosing a key modulus greater than 512 may take
  a few minutes.

How many bits in the modulus [512]:
% Generating 512 bit RSA keys, keys will be non-exportable...[OK]

Alex(config)#line vty 0 4
*Mar 1 0:19:23.349: RSA key size needs to be at least 768 bits for ssh version 2
*Mar 1 0:19:23.349: %SSH-5-ENABLED: SSH 1.5 has been enabled
Alex(config-line)#transport input ssh
Alex(config-line)#login local
Alex(config-line)#exit
Alex(config)#do wr
Building configuration
```

Ctrl+F6 to exit CLI focus

Copy Paste

Top

al Config CLI Attributes

IOS Command Line Interface

```
(config-line)#login local
(config-line)#exit
(config)#do wr
ding configuration...

(config)#
(config)#int g0/0
(config-if)#ip add 172.0.0.1 255.255.255.0
(config-if)#no sh

(config-if)#
NK-5-CHANGED: Interface GigabitEthernet0/0, changed state to up

(config-if)#ex
(config)#int g0/1
(config-if)#ip add 162.0.0.2 255.255.255.0
(config-if)#no sh

(config-if)#
INK-5-CHANGED: Interface GigabitEthernet0/1, changed state to up

(config-if)#ex
(config)#
(config)#ip dhcp pool Alex
(dhcp-config)#network 172.0.0.0 255.255.255.0
(dhcp-config)#dns
(dhcp-config)#dns-server 2.2.2.2
(dhcp-config)#def
(dhcp-config)#default-router 172.0.0.1
(dhcp-config)#do wr
(dhcp-config)#ex
(config)#do wr
uilding configuration...
[OK]
Alex(config)#
```

rl+F6 to exit CLI focus

Copy Paste

op

Physical Config CLI Attributes

IOS Command Line Interface

```
Alex>en
Password:
Alex#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
Alex(config)#ip route 0.0.0.0 0.0.0.0 162.0.0.1
Alex(config)#interface tunnel 1

Alex(config-if)#
%LINK-5-CHANGED: Interface Tunnel1, changed state to up

Alex(config-if)#ip add 100.0.0.2 255.255.255.0
Alex(config-if)#tunnel source g0/1
Alex(config-if)#tunnel des
Alex(config-if)#tunnel destination 182.0.0.2
Alex(config-if)#
%LINEPROTO-5-UPDOWN: Line protocol on Interface Tunnel1, changed state to up

Alex(config-if)#router ospf 1
Alex(config-router)#network 100.0.0.0 0.0.0.255 area 0
Alex(config-router)#network 100.0.0.0 0.0.0.255 area
00:43:07: %OSPF-5-ADJCHG: Process 1, Nbr 192.168.1.1 on Tunnel1 from LOADING to FULL, Loading Done

% Incomplete command.
Alex(config-router)#network 172.0.0.0 0.0.0.255 area
% Incomplete command.
Alex(config-router)#network 172.0.0.0 0.0.0.255 area 0
Alex(config-router)#do wr
Building configuration...
[OK]
Alex(config-router)#ex
Alex(config)#do wr
Building configuration...
[OK]
Alex(config)#
```

Ctrl+F6 to exit CLI focus

Copy Paste

Top

Physical Config CLI Attributes

IOS Command Line Interface

```
 %ADJ-5-PARENT: Midchain parent maintenance for IP midchain out of 1 65E900C0 - looped chain
attempting to stack
 %TUN-5-RECURDOWN: 1 temporarily disabled due to recursive routing

01:38:21: %OSPF-5-ADJCHG: Process 1, Nbr 192.168.1.1 on Tunnel1 from FULL to DOWN, Neighbor Down:
Interface down or detached

Alex(config)#route ospf 1
Alex(config-router)#network 100.0.0.0 0.0.0.255 area 0
Alex(config-router)#network 172.0.0.0 0.0.0.255 area 0
Alex(config-router)#network 162.0.0.0 0.0.0.255 area 0
Alex(config-router)#do wr
Building configuration...
[OK]
Alex(config-router)#exit
Alex(config)#d
%LINEPROTO-5-UPDOWN: Line protocol on Interface Tunnel1, changed state to up
o wr
Building configuration...
[OK]
Alex(config)#
Alex(config)#
01:39:24: %OSPF-5-ADJCHG: Process 1, Nbr 192.168.1.1 on Tunnel1 from LOADING to FULL, Loading Done
 %ADJ-5-PARENT: Midchain parent maintenance for IP midchain out of 1 65E900C0 - looped chain
attempting to stack
 %TUN-5-RECURDOWN: 1 temporarily disabled due to recursive routing

%LINEPROTO-5-UPDOWN: Line protocol on Interface Tunnel1, changed state to down
 %ADJ-5-PARENT: Midchain parent maintenance for IP midchain out of 1 65E900C0 - looped chain
attempting to stack
 %TUN-5-RECURDOWN: 1 temporarily disabled due to recursive routing

01:39:30: %OSPF-5-ADJCHG: Process 1, Nbr 192.168.1.1 on Tunnel1 from FULL to DOWN, Neighbor Down:
Interface down or detached
```

+F6 to exit CLI focus

Copy Paste

Physical Config CLI Attributes

IOS Command Line Interface

```
Router>en
Router#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#hostname Attacker
Attacker(config)#username attacker secret 321
Attacker(config)#enable secret 333
Attacker(config)#line console 0
Attacker(config-line)#login local
Attacker(config-line)#do wr
Building configuration...
[OK]
Attacker(config-line)#exit
Attacker(config)#ip domain name attacker.com
Attacker(config)#crypto key generate rsa
The name for the keys will be: Attacker.attacker.com
Choose the size of the key modulus in the range of 360 to 2048 for your
  General Purpose Keys. Choosing a key modulus greater than 512 may take
  a few minutes.

How many bits in the modulus [512]:
% Generating 512 bit RSA keys, keys will be non-exportable...[OK]

Attacker(config)#line vty 0 4
*Mar 1 0:1:56.567: RSA key size needs to be at least 768 bits for ssh version 2
*Mar 1 0:1:56.567: %SSH-5-ENABLED: SSH 1.5 has been enabled
Attacker(config-line)#transport input ssh
Attacker(config-line)#login local
Attacker(config-line)#exit
Attacker(config)#do wr
Building configuration...
[OK]
Attacker(config)#int g0/0
Attacker(config-if)#ip add 152.0.0.1 255.255.255.0
```

Ctrl+F6 to exit CLI focus

Copy Paste

Top

Physical Config CLI Attributes

IOS Command Line Interface

```
*Mar 1 0:1:56.567: RSA key size needs to be at least 768 bits for ssh version 2
*Mar 1 0:1:56.567: %SSH-5-ENABLED: SSH 1.5 has been enabled
Attacker(config-line)#transport input ssh
Attacker(config-line)#login local
Attacker(config-line)#exit
Attacker(config)#do wr
Building configuration...
[OK]
Attacker(config)#int g0/0
Attacker(config-if)#ip add 152.0.0.1 255.255.255.0
Attacker(config-if)#no sh

Attacker(config-if)#
%LINK-5-CHANGED: Interface GigabitEthernet0/0, changed state to up

Attacker(config-if)#exit
Attacker(config)#do wr
Building configuration...
[OK]
Attacker(config)#ip dhcp pool attacker
Attacker(dhcp-config)#network 152.0.0.0 255.255.255.0
Attacker(dhcp-config)#3.3.3.3
                     ^
% Invalid input detected at '^' marker.

Attacker(dhcp-config)#dns
Attacker(dhcp-config)#dns-server 3.3.3.3
Attacker(dhcp-config)#def
Attacker(dhcp-config)#default-router 152.0.0.1
Attacker(dhcp-config)#do wr
Attacker(dhcp-config)#ex
Attacker(config)#do wr
Building configuration...
[OK]
Attacker(config)#
```

Ctrl+F6 to exit CLI focus

Copy Past

Top

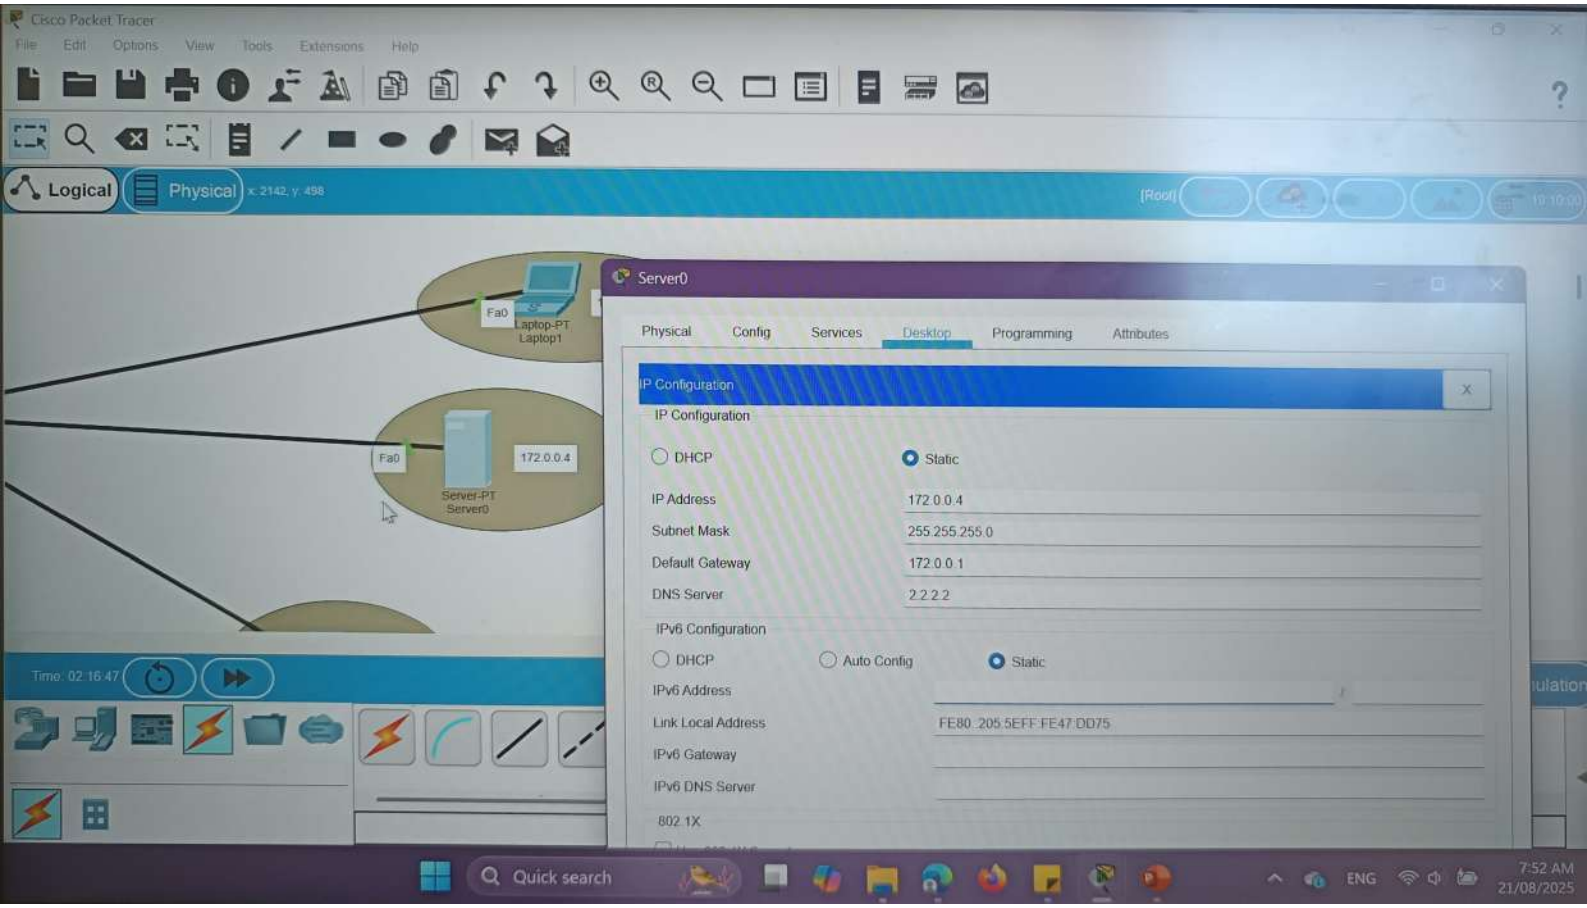
Cisco Packet Tracer
File Edit Options View Tools Extensions Help
Logical
Physical
x: 2142, y: 458
[Root]
Fa0
Laptop-PT
Laptop1
Fa0
172.0.0.4
Server-PT
Server0
Time: 02:16:47
Server0
Physical Config Services Desktop Programming Attributes
IP Configuration
IP Configuration
DHCP
Static
IP Address 172.0.0.4
Subnet Mask 255.255.255.0
Default Gateway 172.0.0.1
DNS Server 2.2.2.2
IPv6 Configuration
DHCP
Auto Config
Static
IPv6 Address
Link Local Address FE80::205:5EFF:FE47:DD75
IPv6 Gateway
IPv6 DNS Server
802.1X
Quick search
ENG
7:52 AM
21/08/2025

Cisco Packet Tracer

File Edit Options View Tools Extensions Help

Logical Physical x: 2303, y: 699 [Root]

Server-PT
Server1
172.0.0.5

Server1

Physical Config Services Desktop Programming Attributes

IP Configuration

IP Configuration

DHCP Static

IP Address 172.0.0.5

Subnet Mask 255.255.255.0

Default Gateway 172.0.0.1

DNS Server 2.2.2.2

IPv6 Configuration

DHCP Auto Config Static

IPv6 Address

Link Local Address FE80::20C:CFFF:FEB6:4E31

IPv6 Gateway

IPv6 DNS Server

802.1X

Use 802.1X Security

Time: 02:18:05

Realtime Simulation

Quick search

ENG 7:53 AM 21/08/2025

ysical Config CLI Attributes

IOS Command Line Interface

```
Switch#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
Switch(config)#hostname switch1
switch1(config)#username habiba secret 123
switch1(config)#enable secret 222
switch1(config)#line console 0
switch1(config-line)#login local
switch1(config-line)#ex
% Ambiguous command: "ex"
switch1(config-line)#exit
switch1(config)#int vlan 1
switch1(config-if)#ip add 192.168.1.201 255.255.255.0
switch1(config-if)#no sh

switch1(config-if)#
%LINK-5-CHANGED: Interface Vlan1, changed state to up

switch1(config-if)#exit
switch1(config)#ip domain name habiba.com
switch1(config)#crypto key generate rsa
The name for the keys will be: switch1.habiba.com
Choose the size of the key modulus in the range of 360 to 2048 for your
  General Purpose Keys. Choosing a key modulus greater than 512 may take
  a few minutes.

How many bits in the modulus [512]:
% Generating 512 bit RSA keys, keys will be non-exportable...[OK]

switch1(config)#line vty 0 4
*Mar 1 0:3:1.174: RSA key size needs to be at least 768 bits for ssh version 2
*Mar 1 0:3:1.174: %SSH-5-ENABLED: SSH 1.5 has been enabled
switch1(config-line)#transport input ssh
switch1(config-line)#login local
switch1(config-line)#exit
switch1(config)#do wr
```

Ctrl+F6 to exit CLI focus

Copy Paste

Top

Physical Config CLI Attributes

IOS Command Line Interface

```
switch1#
switch1#
switch1#
switch1#
switch1#
switch1#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
switch1(config)#int range f0/1-20
switch1(config-if-range)#sw
switch1(config-if-range)#switchport mode access
switch1(config-if-range)#sw
switch1(config-if-range)#switchport po
switch1(config-if-range)#switchport port-security
switch1(config-if-range)#switchport port-security mac
switch1(config-if-range)#switchport port-security mac-address st
switch1(config-if-range)#switchport port-security mac-address sticky
switch1(config-if-range)#sw
switch1(config-if-range)#switchport po
switch1(config-if-range)#switchport port-security vio
switch1(config-if-range)#switchport port-security violation sh
switch1(config-if-range)#switchport port-security violation shutdown
switch1(config-if-range)#sw
switch1(config-if-range)#do wr
Building configuration...
[OK]
switch1(config-if-range)#exit
switch1(config)#do wr
Building configuration...
[OK]
switch1(config)#ex
switch1#
%SYS-5-CONFIG_I: Configured from console by console

switch1#show ?
  access-lists       List access lists
```

Ctrl+F6 to exit CLI focus

Copy Paste

Top

al Config CLI Attributes

IOS Command Line Interface

```
osts                IP domain-name, lookup style, nameservers, and host table
nterfaces           Interface status and configuration
p                   IP information
ldp                 LLDP information
ogging              Show the contents of logging buffers
ac                  MAC configuration
ac-address-table    MAC forwarding table
ls                  Show MultiLayer Switching information
onitor              SPAN information and configuration
ntp                 Network time protocol
port-security       Show secure port information

itch1#show hi
itch1#show history
en
conf t
show ssh
show startup-config
conf t
show history
witch1#
witch1#
witch1#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
switch1(config)#ip dhcp snooping vlan 1
switch1(config)#int f0/24
switch1(config-if)#ip dhcp snooping trust
switch1(config-if)#do wr
Building configuration...
[OK]
switch1(config-if)#exit
switch1(config)#do wr
Building configuration...
[OK]
switch1(config)#
```

Ctrl+F6 to exit CLI focus

Copy Paste

Top

Physical Config CLI Attributes

IOS Command Line Interface

```
Switch>en
Switch#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
Switch(config)#hostname switch2
switch2(config)#username habiba secret 123
switch2(config)#enable secret 222
switch2(config)#line console 0
switch2(config-line)#login local
switch2(config-line)#do wr
Building configuration...
[OK]
switch2(config-line)#exit
switch2(config)#do wr
Building configuration...
[OK]
switch2(config)#int vlan 1
switch2(config-if)#ip add 172.0.0.2 255.255.255.0
switch2(config-if)#no sh

switch2(config-if)#
%LINK-5-CHANGED: Interface Vlan1, changed state to up
 exit
switch2(config)#exit
switch2#
%SYS-5-CONFIG_I: Configured from console by console

switch2#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
switch2(config)#ip domain name habiba.com
switch2(config)#cry
switch2(config)#crypto kkey gen
switch2(config)#crypto kkey gene
switch2(config)#crypto key gne
switch2(config)#crypto key gene
switch2(config)#crypto key generate rsa
```

Ctrl+F6 to exit CLI focus

Copy Paste

Top

Physical Config CLI Attributes

IOS Command Line Interface

```
switch2(config)#crypto key gene
switch2(config)#crypto key generate rsa
The name for the keys will be: switch2.habiba.com
Choose the size of the key modulus in the range of 360 to 2048 for your
  General Purpose Keys. Choosing a key modulus greater than 512 may take
  a few minutes.

How many bits in the modulus [512]:
% Generating 512 bit RSA keys, keys will be non-exportable...[OK]

switch2(config)#line vty 0 4
*Mar 1 1:0:27.452: RSA key size needs to be at least 768 bits for ssh version 2
*Mar 1 1:0:27.452: %SSH-5-ENABLED: SSH 1.5 has been enabled
switch2(config-line)#transpo
switch2(config-line)#transport input ssh
switch2(config-line)#login local
switch2(config-line)#exit
switch2(config)#do wr
Building configuration...
[OK]
switch2(config)#int range f0/1-20
switch2(config-if-range)#sw
switch2(config-if-range)#switchport mode acc
switch2(config-if-range)#switchport mode access
switch2(config-if-range)#sw
switch2(config-if-range)#switchport po
switch2(config-if-range)#switchport port-security
switch2(config-if-range)#switchport port-security mac
switch2(config-if-range)#switchport port-security mac-address st
switch2(config-if-range)#switchport port-security mac-address sticky
switch2(config-if-range)#switchport port-security vio
switch2(config-if-range)#switchport port-security violation sh
switch2(config-if-range)#switchport port-security violation shutdown
switch2(config-if-range)#exit
switch2(config)#
```

Ctrl+F6 to exit CLI focus

Copy Pas

sical Config CLI Attributes

IOS Command Line Interface

```
al 1 1:0:27.452: %SSH-5-ENABLED: SSH 1.5 has been enabled
witch2(config-line)#transpo
witch2(config-line)#transport input ssh
witch2(config-line)#login local
witch2(config-line)#exit
witch2(config)#do wr
uilding configuration...
OK]
witch2(config)#int range f0/1-20
witch2(config-if-range)#sw
switch2(config-if-range)#switchport mode acc
switch2(config-if-range)#switchport mode access
switch2(config-if-range)#sw
switch2(config-if-range)#switchport po
switch2(config-if-range)#switchport port-security
switch2(config-if-range)#switchport port-security mac
switch2(config-if-range)#switchport port-security mac-address st
switch2(config-if-range)#switchport port-security mac-address sticky
switch2(config-if-range)#switchport port-security vio
switch2(config-if-range)#switchport port-security violation sh
switch2(config-if-range)#switchport port-security violation shutdown
switch2(config-if-range)#exit
switch2(config)#
switch2(config)#ip dhcp snooping vlan 1
switch2(config)#int f0/24
switch2(config-if)#ip dhcp snooping trust
switch2(config-if)#ip dhcp snooping trust
switch2(config-if)#do wr
Building configuration...
[OK]
switch2(config-if)#exit
switch2(config)#do wr
Building configuration...
[OK]
switch2(config)#
```

Ctrl+F6 to exit CLI focus

Copy

Top

Search

Physical Config CLI Attributes

IOS Command Line Interface

```
Switch>en
Switch#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
Switch(config)#hostname switch3
switch3(config)#username habiba secret 123
switch3(config)#enable secert 222
                             ^
% Invalid input detected at '^' marker.

switch3(config)#ena
switch3(config)#enable sec
switch3(config)#enable secret 222
switch3(config)#line console 0
switch3(config-line)#login local
switch3(config-line)#do wr
Building configuration...
[OK]
switch3(config-line)#exit
switch3(config)#do wr
Building configuration...
[OK]
switch3(config)#int vlan 1
switch3(config-if)#ip add 192.168.1.202 255.255.255.0
switch3(config-if)#no sh

switch3(config-if)#
%LINK-5-CHANGED: Interface Vlan1, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface Vlan1, changed state to up
%IP-4-DUPADDR: Duplicate address 192.168.1.202 on Vlan1, sourced by 00E0.F7CC.6483

switch3(config-if)#do wr
Building configuration...
```

Ctrl+F6 to exit CLI focus

Copy Paste

Top

Physical Config CLI Attributes

IOS Command Line Interface

```
switch3(config-if)#do wr
Building configuration...
[OK]
switch3(config-if)#exit
switch3(config)#do wr
Building configuration...
[OK]
switch3(config)#ip domain name habiba.com
switch3(config)#crypto key generate rsa
The name for the keys will be: switch3.habiba.com
Choose the size of the key modulus in the range of 360 to 2048 for your
  General Purpose Keys. Choosing a key modulus greater than 512 may take
  a few minutes.

How many bits in the modulus [512]:
% Generating 512 bit RSA keys, keys will be non-exportable...[OK]

switch3(config)#line vty 0 4
*Mar 1 1:34:55.740: RSA key size needs to be at least 768 bits for ssh version 2
*Mar 1 1:34:55.740: %SSH-5-ENABLED: SSH 1.5 has been enabled
switch3(config-line)#transport input ssh
switch3(config-line)#login local
switch3(config-line)#exit
switch3(config)#do wr
Building configuration...
[OK]
switch3(config)#
switch3(config)#int range f0/1-20
switch3(config-if-range)#sw
switch3(config-if-range)#switchport mode access
switch3(config-if-range)#sw
switch3(config-if-range)#switchport po
switch3(config-if-range)#switchport port-security
switch3(config-if-range)#switchport port-security mac
switch3(config-if-range)#switchport port-security mac-address st
```

Ctrl+F6 to exit CLI focus

Copy Paste

Top

Physical Config CLI Attributes

IOS Command Line Interface

```
switch3(config-line)#exit
switch3(config)#do wr
Building configuration...
[OK]
switch3(config)#
switch3(config)#int range f0/1-20
switch3(config-if-range)#sw
switch3(config-if-range)#switchport mode access
switch3(config-if-range)#sw
switch3(config-if-range)#switchport po
switch3(config-if-range)#switchport port-security
switch3(config-if-range)#switchport port-security mac
switch3(config-if-range)#switchport port-security mac-address st
switch3(config-if-range)#switchport port-security mac-address sticky
switch3(config-if-range)#switchport port-security vio
switch3(config-if-range)#switchport port-security violation sh
switch3(config-if-range)#switchport port-security violation shutdown
switch3(config-if-range)#do wr
Building configuration...
[OK]
switch3(config-if-range)#exit
switch3(config)#do wr
Building configuration...
[OK]
switch3(config)#ip dhcp snooping vlan 1
switch3(config)#int f0/22
switch3(config-if)#ip dhcp snooping trust
switch3(config-if)#do wr
Building configuration...
[OK]
switch3(config-if)#exit
switch3(config)#do wr
Building configuration...
[OK]
switch3(config)#
```

Ctrl+F6 to exit CLI focus

Copy Paste

Top

Physical Config CLI Attributes

IOS Command Line Interface

```
Switch>en
Switch#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
Switch(config)#hostname switch4
switch4(config)#username habiba secret 123
switch4(config)#enable secret 222
switch4(config)#line console 0
switch4(config-line)#login local
switch4(config-line)#do wr
Building configuration...
[OK]
switch4(config-line)#exit
switch4(config)#do wr
Building configuration...
[OK]
switch4(config)#int vlan 1
switch4(config-if)#ip add 192.168.1.203 255.255.255.0
switch4(config-if)#no sh

switch4(config-if)#
%LINK-5-CHANGED: Interface Vlan1, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface Vlan1, changed state to up

switch4(config-if)#do wr
Building configuration...
[OK]
switch4(config-if)#exit
switch4(config)#do wr
Building configuration...
[OK]
switch4(config)#ip domain name habiba.com
switch4(config)#crypto key generate rsa
The name for the keys will be: switch4.habiba.com
```

Ctrl+F6 to exit CLI focus

Copy Paste

Top

Physical Config CLI Attributes

IOS Command Line Interface

```
[OK]
switch4(config)#ip domain name habiba.com
switch4(config)#crypto key generate rsa
The name for the keys will be: switch4.habiba.com
Choose the size of the key modulus in the range of 360 to 2048 for your
  General Purpose Keys. Choosing a key modulus greater than 512 may take
  a few minutes.

How many bits in the modulus [512]:
% Generating 512 bit RSA keys, keys will be non-exportable...[OK]

switch4(config)#line vty 0 4
*Mar 1 1:49:30.988: RSA key size needs to be at least 768 bits for ssh version 2
*Mar 1 1:49:30.988: %SSH-5-ENABLED: SSH 1.5 has been enabled
switch4(config-line)#transport input ssh
switch4(config-line)#login local
switch4(config-line)#do wr
Building configuration...
[OK]
switch4(config-line)#exit
switch4(config)#do wr
Building configuration...
[OK]
switch4(config)#int f0/1-20
                       ^
% Invalid input detected at '^' marker.

switch4(config)#int range f0/1-20
switch4(config-if-range)#sw
switch4(config-if-range)#switchport mode access
switch4(config-if-range)#sw
switch4(config-if-range)#switchport po
switch4(config-if-range)#switchport port-security
switch4(config-if-range)#switchport port-security mac
switch4(config-if-range)#switchport port-security mac-address st
```

trl+F6 to exit CLI focus

Copy Paste

Search

ysical Config CLI Attributes

IOS Command Line Interface

```
switch4(config)#int range f0/1-20
switch4(config-if-range)#sw
switch4(config-if-range)#switchport mode access
switch4(config-if-range)#sw
switch4(config-if-range)#switchport po
switch4(config-if-range)#switchport port-security
switch4(config-if-range)#switchport port-security mac
switch4(config-if-range)#switchport port-security mac-address st
switch4(config-if-range)#switchport port-security mac-address sticky
switch4(config-if-range)#switchport port-security vio
switch4(config-if-range)#switchport port-security violation sh
switch4(config-if-range)#switchport port-security violation shutdown
switch4(config-if-range)#do wr
Building configuration...
[OK]
switch4(config-if-range)#exit
switch4(config)#do wr
Building configuration...
[OK]
switch4(config)#ip dhcp snooping vlan 1
switch4(config)#int f0/23
switch4(config-if)#ip dhcp snooping trust
switch4(config-if)#do wr
Building configuration...
[OK]
switch4(config-if)#exit
switch4(config)#do wr
Building configuration...
[OK]
switch4(config)#ip dhcp sn
switch4(config)#ip dhcp snooping vlan 1
switch4(config)#int f0/23
switch4(config-if)#ip dhcp sn
switch4(config-if)#ip dhcp snooping trust
```

Ctrl+F6 to exit CLI focus

Copy Paste

Top Search

ysical Config CLI Attributes

IOS Command Line Interface

```
switch4(config-if-range)#exit
switch4(config)#do wr
Building configuration...
[OK]
switch4(config)#ip dhcp snooping vlan 1
switch4(config)#int f0/23
switch4(config-if)#ip dhcp snooping trust
switch4(config-if)#do wr
Building configuration...
[OK]
switch4(config-if)#exit
switch4(config)#do wr
Building configuration...
[OK]
switch4(config)#ip dhcp sn
switch4(config)#ip dhcp snooping vlan 1
switch4(config)#int f0/23
switch4(config-if)#ip dhcp sn
switch4(config-if)#ip dhcp snooping trust
switch4(config-if)#do wr
Building configuration...
[OK]
switch4(config-if)#exit
switch4(config)#do wr
Building configuration...
[OK]
switch4(config)#
%LINK-5-CHANGED: Interface FastEthernet0/1, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up

%LINK-5-CHANGED: Interface FastEthernet0/2, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/2, changed state to up
```

Ctrl+F6 to exit CLI focus

Top

Copy

Physical Config CLI Attributes

IOS Command Line Interface

```
Switch>en
Switch#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
Switch(config)#hostname switch5
switch5(config)#username habiba secret 123
switch5(config)#enable secret 222
switch5(config)#line console 0
switch5(config-line)#login local
switch5(config-line)#do wr
Building configuration...
[OK]
switch5(config-line)#exit
switch5(config)#do wr
Building configuration...
[OK]
switch5(config)#int vlan 1
switch5(config-if)#ip add 192.168.1.204 255.255.255.0
switch5(config-if)#no sh

switch5(config-if)#
%LINK-5-CHANGED: Interface Vlan1, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface Vlan1, changed state to up

switch5(config-if)#exit
switch5(config)#ip domain name habiba.com
switch5(config)#crypto key ge
switch5(config)#crypto key generate rsa
The name for the keys will be: switch5.habiba.com
Choose the size of the key modulus in the range of 360 to 2048 for your
  General Purpose Keys. Choosing a key modulus greater than 512 may take
  a few minutes.
```

Ctrl+F6 to exit CLI focus

Copy Paste

Top

l Config CLI Attributes

IOS Command Line Interface

```
many bits in the modulus [512]:
enerating 512 bit RSA keys, keys will be non-exportable...[OK]

tch5(config)#line vty 0 4
r 1 2:4:40.274: RSA key size needs to be at least 768 bits for ssh version 2
r 1 2:4:40.274: %SSH-5-ENABLED: SSH 1.5 has been enabled
itch5(config-line)#tr
itch5(config-line)#transport input ssh
itch5(config-line)#login local
itch5(config-line)#do wr
ilding configuration...
OK]
witch5(config-line)#exit
witch5(config)#do wr
uilding configuration...
[OK]
switch5(config)#int range f0/1-20
switch5(config-if-range)#sw
switch5(config-if-range)#switchport mode access
switch5(config-if-range)#sw
switch5(config-if-range)#switchport po
switch5(config-if-range)#switchport port-security
switch5(config-if-range)#switchport port-security mac
switch5(config-if-range)#switchport port-security mac-address st
switch5(config-if-range)#switchport port-security mac-address sticky
switch5(config-if-range)#switchport port-security vio
switch5(config-if-range)#switchport port-security violation sh
switch5(config-if-range)#switchport port-security violation shutdown
switch5(config-if-range)#do wr
Building configuration...
[OK]
switch5(config-if-range)#exit
switch5(config)#do wr
Building configuration...
[OK]
```

Ctrl+F6 to exit CLI focus

Copy Paste

Top

Physical Config CLI Attributes

IOS Command Line Interface

```
[OK]
switch5(config-line)#exit
switch5(config)#do wr
Building configuration...
[OK]
switch5(config)#int range f0/1-20
switch5(config-if-range)#sw
switch5(config-if-range)#switchport mode access
switch5(config-if-range)#sw
switch5(config-if-range)#switchport po
switch5(config-if-range)#switchport port-security
switch5(config-if-range)#switchport port-security mac
switch5(config-if-range)#switchport port-security mac-address st
switch5(config-if-range)#switchport port-security mac-address sticky
switch5(config-if-range)#switchport port-security vio
switch5(config-if-range)#switchport port-security violation sh
switch5(config-if-range)#switchport port-security violation shutdown
switch5(config-if-range)#do wr
Building configuration...
[OK]
switch5(config-if-range)#exit
switch5(config)#do wr
Building configuration...
[OK]
switch5(config)#ip dhcp snooping vlan 1
switch5(config)#int f0/21
switch5(config-if)#ip dhcp snooping trust
switch5(config-if)#do wr
Building configuration...
[OK]
switch5(config-if)#exit
switch5(config)#do wr
Building configuration...
[OK]
switch5(config)#
```

Ctrl+F6 to exit CLI focus

Copy Paste

Top Search

Physical Config Desktop Programming Attributes

Command Prompt

```
C:\>ping 192.168.1.202

Pinging 192.168.1.202 with 32 bytes of data:

Reply from 192.168.1.202: bytes=32 time=3ms TTL=255
Reply from 192.168.1.202: bytes=32 time<1ms TTL=255
Reply from 192.168.1.202: bytes=32 time<1ms TTL=255
Reply from 192.168.1.202: bytes=32 time<1ms TTL=255

Ping statistics for 192.168.1.202:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 3ms, Average = 0ms

C:\>ping 192.168.1.208

Pinging 192.168.1.208 with 32 bytes of data:

Reply from 192.168.1.208: bytes=32 time=6ms TTL=128
Reply from 192.168.1.208: bytes=32 time<1ms TTL=128
Reply from 192.168.1.208: bytes=32 time<1ms TTL=128
Reply from 192.168.1.208: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.208:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 6ms, Average = 1ms

C:\>ping 192.168.1.211

Pinging 192.168.1.211 with 32 bytes of data:

Reply from 192.168.1.211: bytes=32 time<1ms TTL=128
Reply from 192.168.1.211: bytes=32 time<1ms TTL=128
Reply from 192.168.1.211: bytes=32 time<1ms TTL=128
Reply from 192.168.1.211: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.211:
```

Physical Config Desktop Programming Attributes

Command Prompt

```
C:\>ping 192.168.1.212

Pinging 192.168.1.212 with 32 bytes of data:

Reply from 192.168.1.212: bytes=32 time=2ms TTL=128
Reply from 192.168.1.212: bytes=32 time<1ms TTL=128
Reply from 192.168.1.212: bytes=32 time<1ms TTL=128
Reply from 192.168.1.212: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.212:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 2ms, Average = 0ms

C:\>ping 192.168.1.215

Pinging 192.168.1.215 with 32 bytes of data:

Reply from 192.168.1.215: bytes=32 time<1ms TTL=128
Reply from 192.168.1.215: bytes=32 time=1ms TTL=128
Reply from 192.168.1.215: bytes=32 time<1ms TTL=128
Reply from 192.168.1.215: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.215:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>ping 192.168.1.216

Pinging 192.168.1.216 with 32 bytes of data:

Reply from 192.168.1.216: bytes=32 time=1ms TTL=128
Reply from 192.168.1.216: bytes=32 time<1ms TTL=128
Reply from 192.168.1.216: bytes=32 time=1ms TTL=128
Reply from 192.168.1.216: bytes=32 time<1ms TTL=128
```

Physical Config Desktop Programming Attributes

Command Prompt

```
C:\>ping 192.168.1.203

Pinging 192.168.1.203 with 32 bytes of data:

Request timed out.
Reply from 192.168.1.203: bytes=32 time<1ms TTL=255
Reply from 192.168.1.203: bytes=32 time=2ms TTL=255
Reply from 192.168.1.203: bytes=32 time=1ms TTL=255

Ping statistics for 192.168.1.203:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 2ms, Average = 1ms

C:\>ping 192.168.1.204

Pinging 192.168.1.204 with 32 bytes of data:

Request timed out.
Reply from 192.168.1.204: bytes=32 time<1ms TTL=255
Reply from 192.168.1.204: bytes=32 time<1ms TTL=255
Reply from 192.168.1.204: bytes=32 time<1ms TTL=255

Ping statistics for 192.168.1.204:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 192.168.1.201

Pinging 192.168.1.201 with 32 bytes of data:

Request timed out.
Reply from 192.168.1.201: bytes=32 time<1ms TTL=255
Reply from 192.168.1.201: bytes=32 time<1ms TTL=255
Reply from 192.168.1.201: bytes=32 time<1ms TTL=255

Ping statistics for 192.168.1.201:
```

Physical Config Desktop Programming Attributes

Command Prompt

```
C:\>ping 192.168.1.1

Pinging 192.168.1.1 with 32 bytes of data:

Reply from 192.168.1.1: bytes=32 time<1ms TTL=255
Reply from 192.168.1.1: bytes=32 time<1ms TTL=255
Reply from 192.168.1.1: bytes=32 time<1ms TTL=255
Reply from 192.168.1.1: bytes=32 time<1ms TTL=255

Ping statistics for 192.168.1.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 100.0.0.1

Pinging 100.0.0.1 with 32 bytes of data:

Reply from 100.0.0.1: bytes=32 time<1ms TTL=255
Reply from 100.0.0.1: bytes=32 time=1ms TTL=255
Reply from 100.0.0.1: bytes=32 time<1ms TTL=255
Reply from 100.0.0.1: bytes=32 time<1ms TTL=255

Ping statistics for 100.0.0.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>ping 100.0.0.2

Pinging 100.0.0.2 with 32 bytes of data:

Reply from 100.0.0.2: bytes=32 time=1ms TTL=253
Reply from 100.0.0.2: bytes=32 time<1ms TTL=253
Reply from 100.0.0.2: bytes=32 time=1ms TTL=253
Reply from 100.0.0.2: bytes=32 time=1ms TTL=253
```

Physical Config Desktop Programming Attributes

Command Prompt

```
Reply from 100.0.0.2: bytes=32 time<1ms TTL=253
Reply from 100.0.0.2: bytes=32 time=1ms TTL=253
Reply from 100.0.0.2: bytes=32 time=1ms TTL=253

Ping statistics for 100.0.0.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>ping 182.0.0.1

Pinging 182.0.0.1 with 32 bytes of data:

Reply from 182.0.0.1: bytes=32 time<1ms TTL=254
Reply from 182.0.0.1: bytes=32 time<1ms TTL=254
Reply from 182.0.0.1: bytes=32 time<1ms TTL=254
Reply from 182.0.0.1: bytes=32 time<1ms TTL=254

Ping statistics for 182.0.0.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 182.0.0.2

Pinging 182.0.0.2 with 32 bytes of data:

Reply from 182.0.0.2: bytes=32 time=1ms TTL=255
Reply from 182.0.0.2: bytes=32 time<1ms TTL=255
Reply from 182.0.0.2: bytes=32 time<1ms TTL=255
Reply from 182.0.0.2: bytes=32 time<1ms TTL=255

Ping statistics for 182.0.0.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>
```

Physical Config Desktop Programming Attributes

Command Prompt

```
Reply from 182.0.0.2: bytes=32 time<1ms TTL=255
Reply from 182.0.0.2: bytes=32 time<1ms TTL=255
Reply from 182.0.0.2: bytes=32 time<1ms TTL=255

Ping statistics for 182.0.0.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss)
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>ping 162.0.0.1

Pinging 162.0.0.1 with 32 bytes of data:

Reply from 162.0.0.1: bytes=32 time<1ms TTL=254
Reply from 162.0.0.1: bytes=32 time=1ms TTL=254
Reply from 162.0.0.1: bytes=32 time=3ms TTL=254
Reply from 162.0.0.1: bytes=32 time<1ms TTL=254

Ping statistics for 162.0.0.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 3ms, Average = 1ms

C:\>ping 162.0.0.2

Pinging 162.0.0.2 with 32 bytes of data:

Reply from 162.0.0.2: bytes=32 time<1ms TTL=253
Reply from 162.0.0.2: bytes=32 time<1ms TTL=253
Reply from 162.0.0.2: bytes=32 time<1ms TTL=253
Reply from 162.0.0.2: bytes=32 time<1ms TTL=253

Ping statistics for 162.0.0.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```

Physical Config Desktop Programming Attributes

Command Prompt

```
C:\>ping 172.0.0.5

Pinging 172.0.0.5 with 32 bytes of data:

Reply from 172.0.0.5: bytes=32 time=1ms TTL=125
Reply from 172.0.0.5: bytes=32 time=1ms TTL=125
Reply from 172.0.0.5: bytes=32 time<1ms TTL=125
Reply from 172.0.0.5: bytes=32 time=4ms TTL=125

Ping statistics for 172.0.0.5:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 4ms, Average = 1ms

C:\>ping 172.0.0.6

Pinging 172.0.0.6 with 32 bytes of data:

Reply from 172.0.0.6: bytes=32 time=1ms TTL=125
Reply from 172.0.0.6: bytes=32 time<1ms TTL=125
Reply from 172.0.0.6: bytes=32 time<1ms TTL=125
Reply from 172.0.0.6: bytes=32 time<1ms TTL=125

Ping statistics for 172.0.0.6:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>ping 172.0.0.7

Pinging 172.0.0.7 with 32 bytes of data:

Request timed out.
Reply from 172.0.0.7: bytes=32 time<1ms TTL=125
Reply from 172.0.0.7: bytes=32 time<1ms TTL=125
Reply from 172.0.0.7: bytes=32 time<1ms TTL=125

Ping statistics for 172.0.0.7:
```