
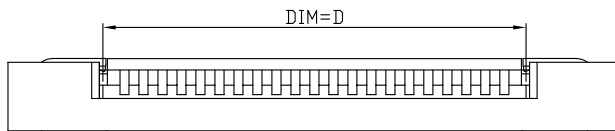
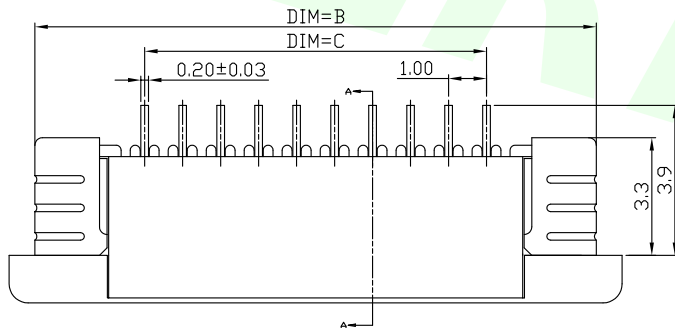



PCB Layout

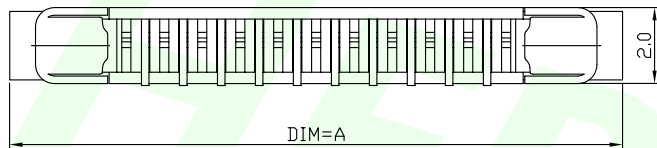

Electrical Characteristics:
 Current rating: 0.5A AC/DC
 Voltage rating: 50V AC/DC
 Temperature range: -25°C~+85°C
 Withstand Voltage: 500V AC/Minute
 Contact Resistance: 20m Ω Max.
 Insulation resistance: 800M Ω Min.
 Relative Humidity: 93%+40°C

Material Description:
 Terminal: Phosphor Bronze Tin-plated
 Fitting Nail: Brass Tin-plated
 Housing: LCP UL94V-0, Color: Natural
 Slider: LCP UL94V-0, Color: Black


所有材料為
 "環保材料"
 2013.11.07
 RoHS

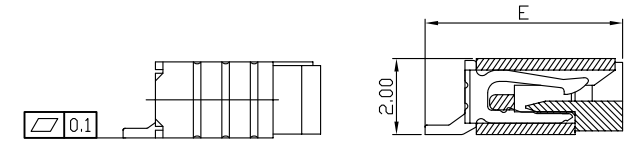

Upper Contact

SECTION A-A

| PIN NO. | A | B | C | D | E |
|---------|------|------|------|------|-----|
| 30P | 36.1 | 35.1 | 29.0 | 31.1 | 5.8 |
| 29P | 35.1 | 34.1 | 28.0 | 30.1 | |
| 28P | 34.1 | 33.1 | 27.0 | 29.1 | |
| 27P | 33.1 | 32.1 | 26.0 | 28.1 | |
| 26P | 32.1 | 31.1 | 25.0 | 27.1 | |
| 25P | 31.1 | 30.1 | 24.0 | 26.1 | |
| 24P | 30.1 | 29.1 | 23.0 | 25.1 | |
| 23P | 29.1 | 28.1 | 22.0 | 24.1 | |
| 22P | 28.1 | 27.1 | 21.0 | 23.1 | |
| 21P | 27.1 | 26.1 | 20.0 | 22.1 | |
| 20P | 26.1 | 25.1 | 19.0 | 21.1 | 5.2 |
| 19P | 25.5 | 24.1 | 18.0 | 20.1 | |
| 18P | 24.1 | 23.1 | 17.0 | 19.1 | |
| 17P | 23.1 | 22.1 | 16.0 | 18.1 | |
| 16P | 22.1 | 21.1 | 15.0 | 17.1 | |
| 15P | 21.1 | 20.1 | 14.0 | 16.1 | |
| 14P | 20.1 | 19.1 | 13.0 | 15.1 | |
| 13P | 19.1 | 18.1 | 12.0 | 14.1 | |
| 12P | 18.1 | 17.1 | 11.0 | 13.1 | |
| 11P | 17.1 | 16.1 | 10.0 | 12.1 | |
| 10P | 16.1 | 15.1 | 9.0 | 11.1 | 5.0 |
| 9P | 15.1 | 14.1 | 8.0 | 10.1 | |
| 8P | 14.1 | 13.1 | 7.0 | 9.1 | |
| 7P | 13.1 | 12.1 | 6.0 | 8.1 | |
| 6P | 12.1 | 11.1 | 5.0 | 7.1 | 4.8 |
| 5P | 11.1 | 10.1 | 4.0 | 6.1 | |
| 4P | 10.1 | 9.1 | 3.0 | 5.1 | |

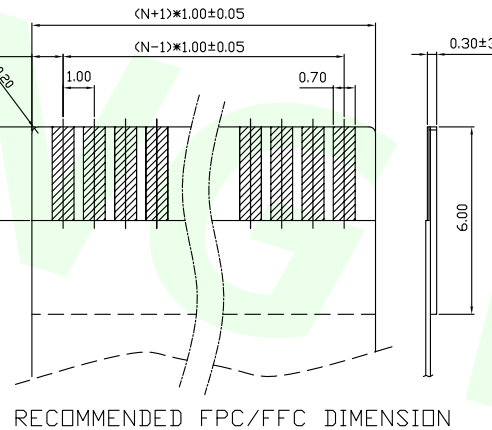

RECOMMENDED FPC/FFC DIMENSION

Part No:
FPC220U0 XX - CT X

T: Tube Packing
 R: Tape/Reel Packing

04~30 PIN