


On produced PCBs (fev 2022),  
pin 1 and 2 (RJ12) should be inverted !!!  
TX/RX... pin 3 and 4 (RJ12) are inverted !!!

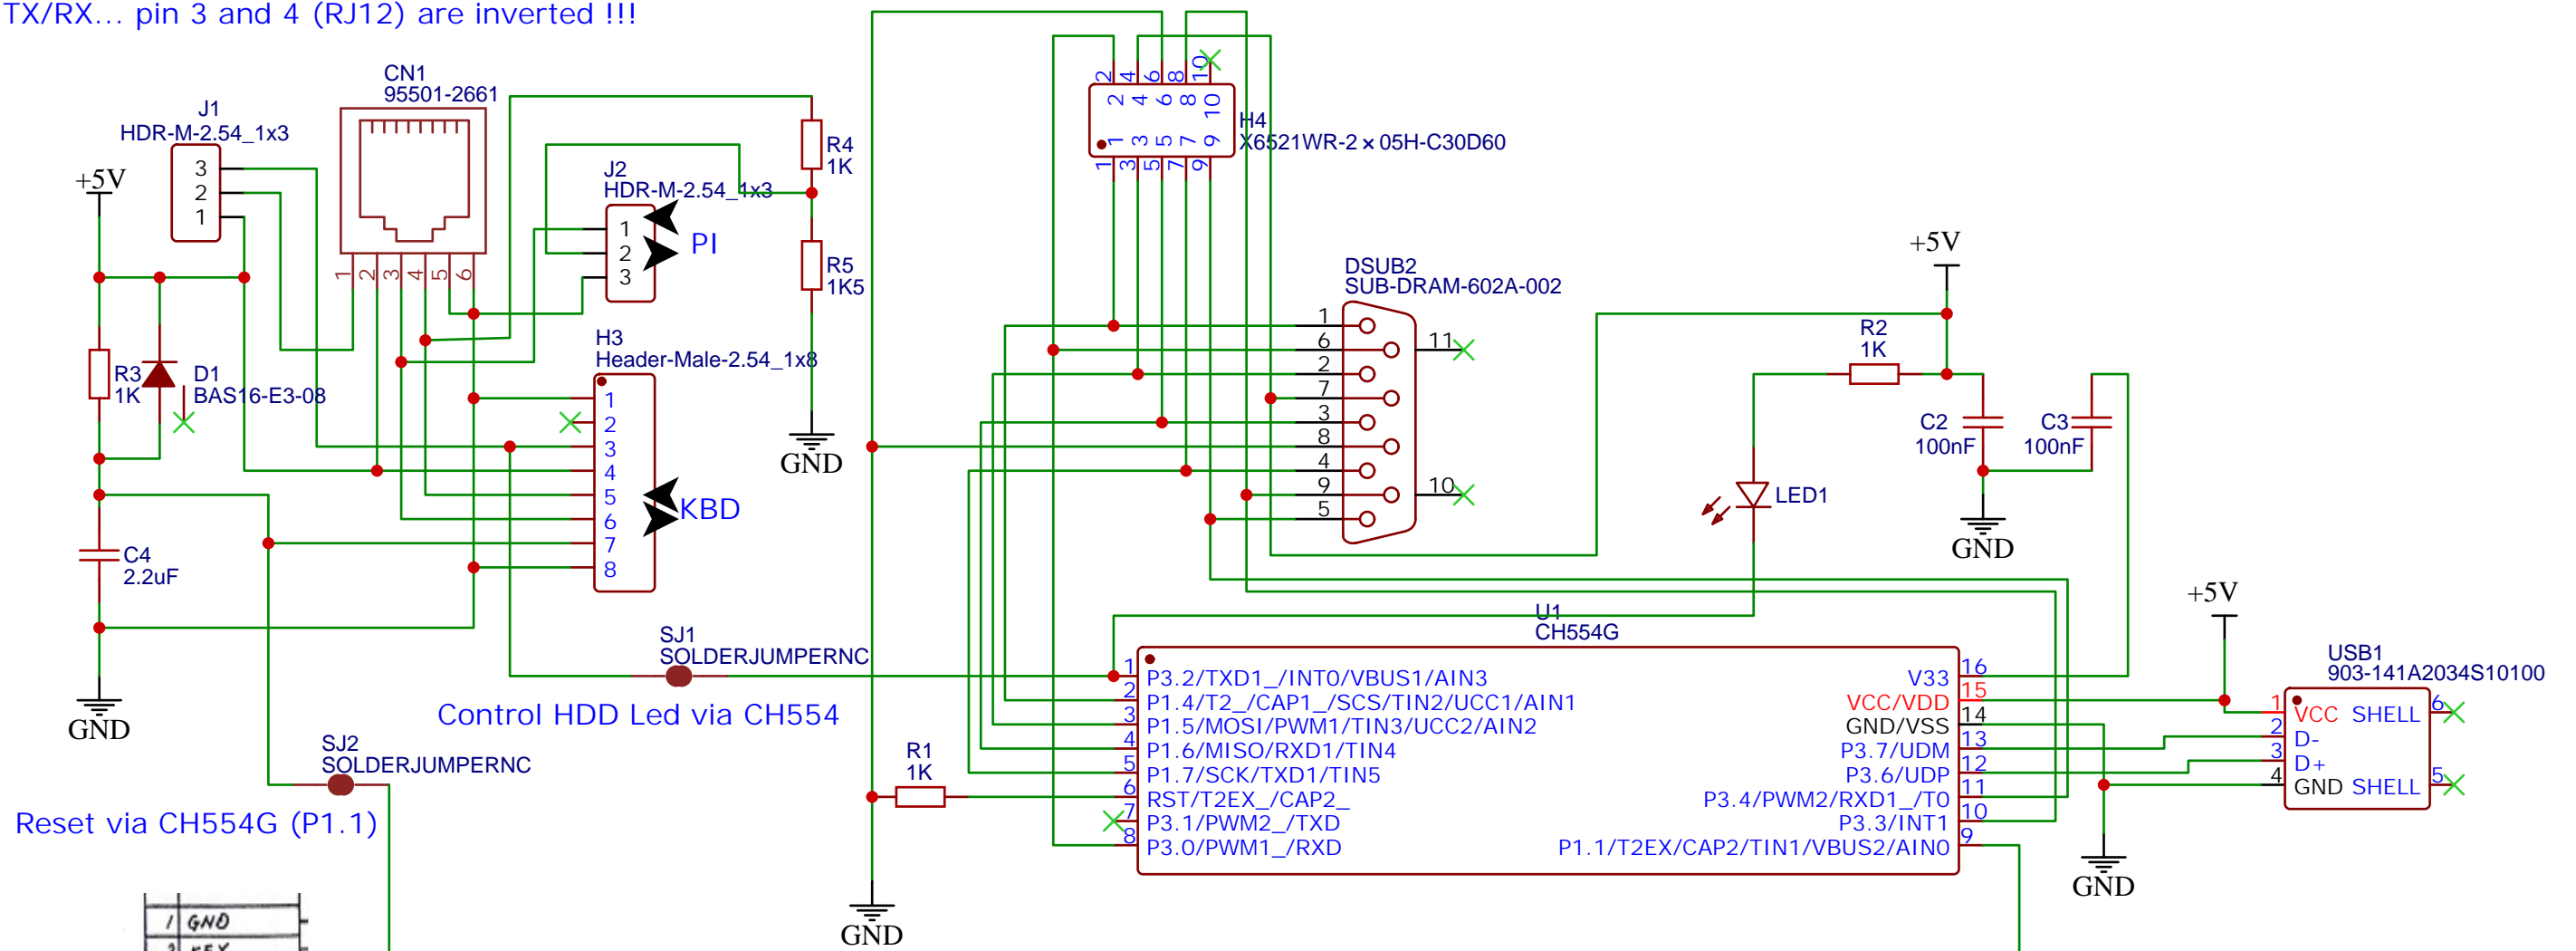

1	GND
2	KEY
3	LED
4	VCC
5	SD TO CPU
6	SD FROM CPU
7	RESET
8	GND