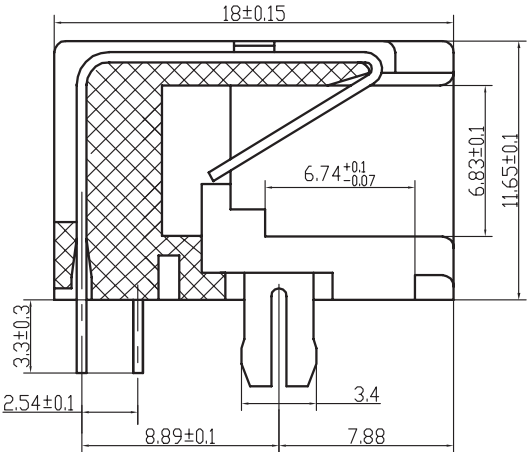
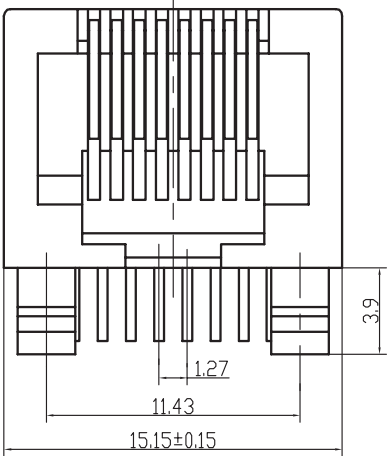


PCB LAYOUT - COMPONENT VIEW



TECHNICAL CHARACTERISTICS

MATERIAL
INSULATOR MATERIAL: PBT
FLAMMABILITY RATING: UL94-V0
COLOR: BLACK
CONTACT MATERIAL: COPPER ALLOY
CONTACT TYPE: STAMPED
CONTACT PLATING: GOLD
QUALITY CLASS: 500 MATING CYCLES



ENVIRONMENTAL
OPERATING TEMPERATURE: -40 °C UP TO 85 °C
COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL
CURRENT RATING: 1.5 A
WORKING VOLTAGE: 120 VAC
INSULATION RESISTANCE: >500 MΩ
DIELECTRIC WITHSTANDING VOLTAGE: 1 000 VAC/MIN
CONTACT RESISTANCE: 20 mΩ MAX

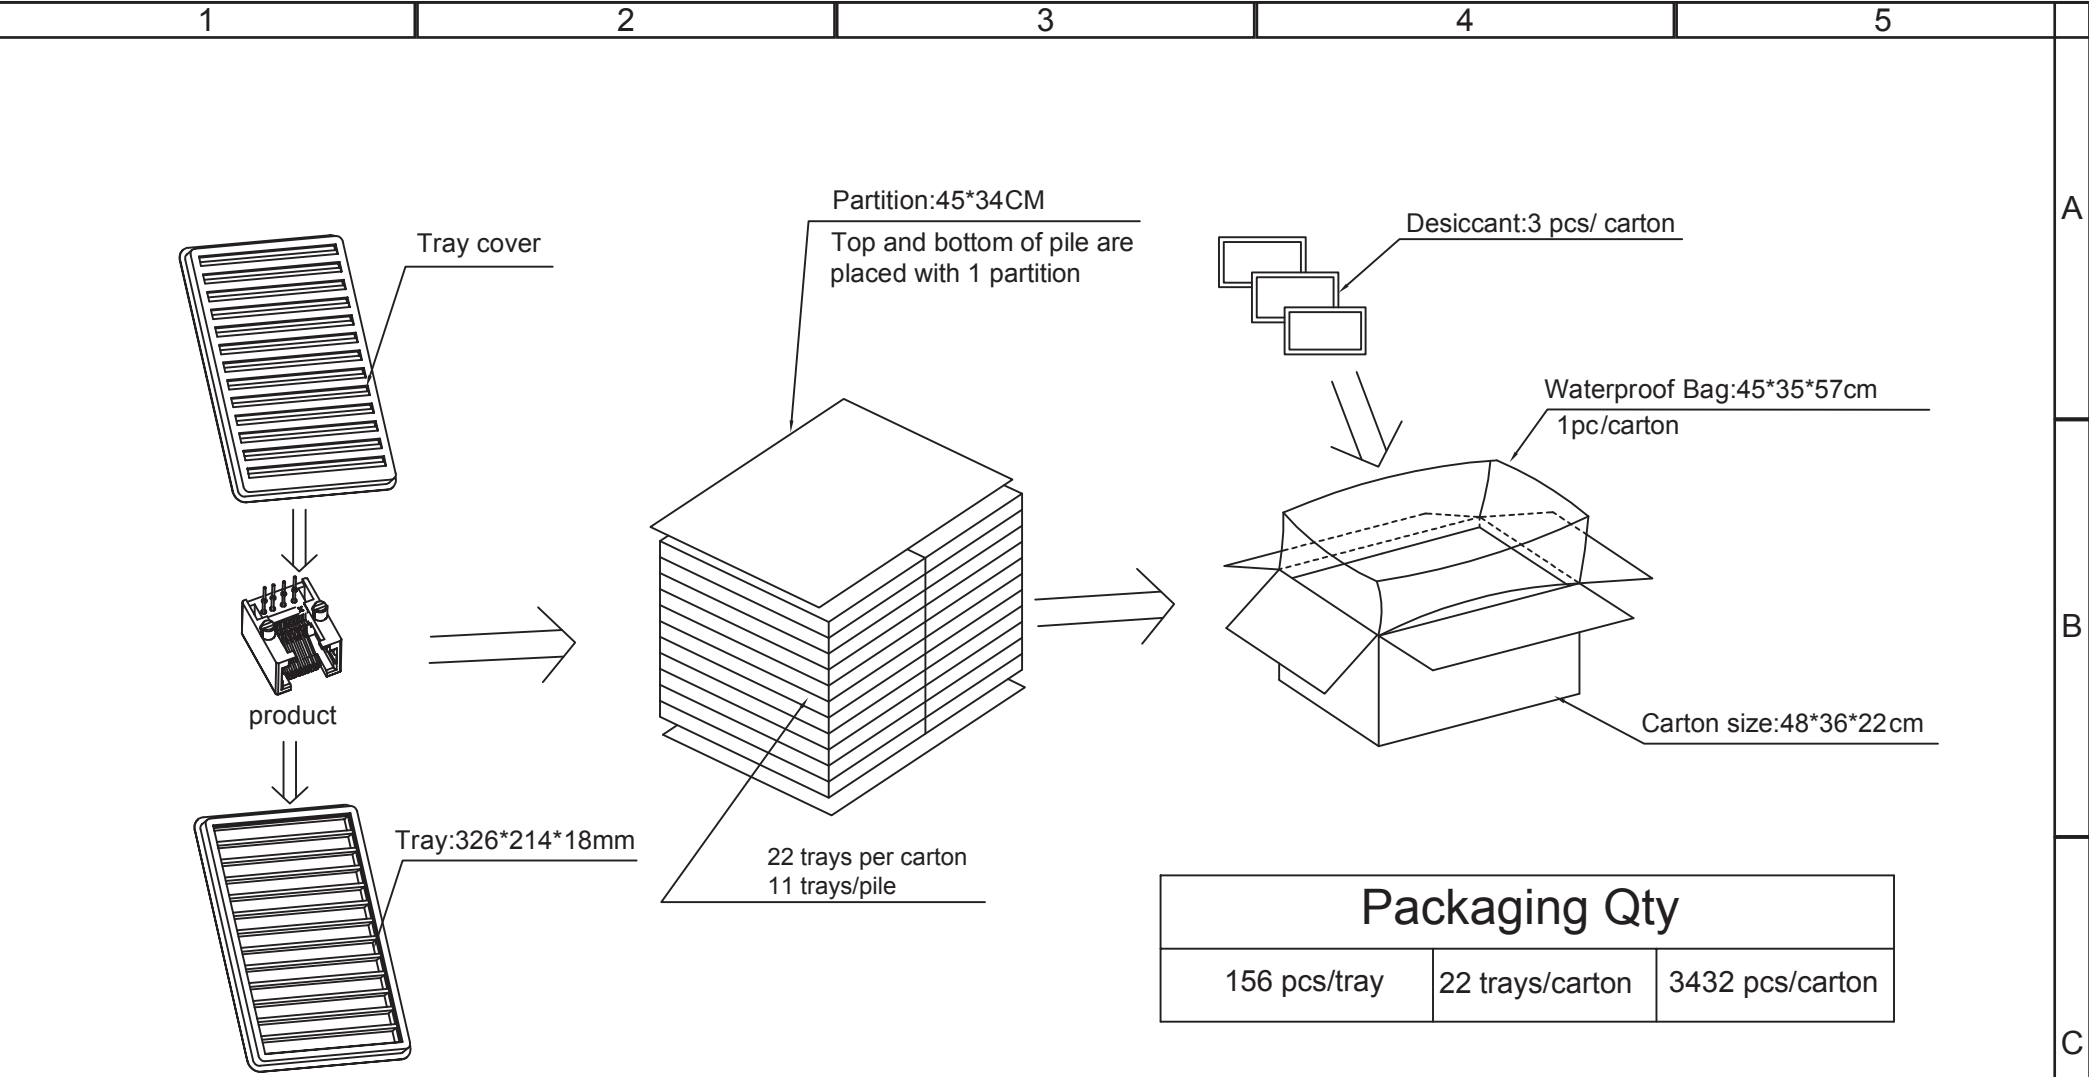
STANDARD
CERTIFIED: E324776



SOLDERING
JEDEC LEAD FREE WAVE SOLDERING PROCESS

PACKAGING
TRAY

RoHS Compliant						
G				<div>PROJECTION:</div> 	<div>GENERAL TOLERANCE</div> <div>.X = +/- 0.2</div> <div>.XX = +/- 0.15</div>	<div><div>WÜRTH ELEKTRONIK</div></div>
F	03-JAN-14	TPK DIM ADD	QL			
E	26-SEP-13	TEMP UPDATE	QL			
D	09-JUN-11	HOLE DIMENSION	GG			
C	07-OCT-09	UL STANDARD	JP	APPROVAL: RJ	UNIT: MM	<div>DESCRIPTION: HORIZONTAL PLASTIC 8P8C MODULAR JACK TAB DOWN</div> <div>WERI PART NO: 615 008 137 121</div>
B	15-FEB-08	MOHM/mOHM UNITS	CH		SCALE:	
A	20-NOV-07	PDF	CH		SHEET: 1/1	
REV	DATE	FILE	BY		DRAW:	

SIZE
A4



RoHS Compliant				<div>PROJECTION:</div> <div></div>	<div>GENERAL TOLERANCE</div> <div>.X = \pm 0.2</div> <div>.XX = \pm 0.15</div>	<div></div> <div>WÜRTH ELEKTRONIK</div>	
G							
F							
E							
D							
C				APPROVAL: RJ	UNIT: MM	DESCRIPTION: HORIZONTAL PLASTIC 8P8C MODULAR JACK TAB DOWN	SIZE A4
B					SCALE:		
A					SHEET: 1/1		
REV	DATE	FILE	BY		DRAW:		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Wurth Electronics:](#)

[615008137121](#)