

RSLogix Micro Project Report



Processor Information

Processor Type: Bul.1763 MicroLogix 1100 Series B

Processor Name: PROC1

Total Memory Used: 222 Instruction Words Used - 54 Data Table Words Used

Total Memory Left: 6434 Instruction Words Left

Program Files: 7

Data Files: 9

Program ID: 868f

I/O Configuration

0 Bul.1763
1
2
3
4

MicroLogix 1100 Series B

Channel Configuration

CHANNEL 0 (SYSTEM) - Driver: DF1 Full Duplex

CHANNEL 0 (SYSTEM) - Driver: DF1 Full Duplex Edit Resource/Owner Timeout: 60
CHANNEL 0 (SYSTEM) - Driver: DF1 Full Duplex Passthru Link ID: 1
CHANNEL 0 (SYSTEM) - Driver: DF1 Full Duplex Write Protected: No
CHANNEL 0 (SYSTEM) - Driver: DF1 Full Duplex Comms Servicing Selection: Yes
CHANNEL 0 (SYSTEM) - Driver: DF1 Full Duplex Message Servicing Selection: Yes
CHANNEL 0 (SYSTEM) - Driver: DF1 Full Duplex 1st AWA Append Character: \d
CHANNEL 0 (SYSTEM) - Driver: DF1 Full Duplex 2nd AWA Append Character: \a

Source ID: 1 (decimal)
Baud: 19200
Parity: NONE
Control Line : No Handshaking
Error Detection: CRC
Embedded Responses: Auto Detect
Duplicate Packet Detect: Yes
ACK Timeout(x20 ms): 50
NAK Retries: 3
ENQ Retries: 3

CHANNEL 1 (SYSTEM) - Driver: Ethernet

CHANNEL 1 (SYSTEM) - Driver: Ethernet Edit Resource/Owner Timeout: 60
CHANNEL 1 (SYSTEM) - Driver: Ethernet Passthru Link ID: 1
CHANNEL 1 (SYSTEM) - Driver: Ethernet Write Protected: No
CHANNEL 1 (SYSTEM) - Driver: Ethernet Comms Servicing Selection: Yes
CHANNEL 1 (SYSTEM) - Driver: Ethernet Message Servicing Selection: Yes


Hardware Address: 00:00:00:00:00:00
IP Address: 0.0.0.0
Subnet Mask: 0.0.0.0
Gateway Address: 0.0.0.0
Msg Connection Timeout (x 1mS): 15000
Msg Reply Timeout (x mS): 3000
Inactivity Timeout (x Min): 30
Bootp Enable: Yes
Dhcp Enable No
SNMP Enable: No
HTTP Enable: Yes
Auto Negotiate Enable: Yes
Port Speed Enable: 10/100 Mbps Full Duplex/Half Duplex
Contact:
Location:


Program File List


Name	Number	Type	Rungs	Debug	Bytes
[SYSTEM]	0	SYS	0	No	0
	1	SYS	0	No	0
	2	LADDER	5	No	39
IO	3	LADDER	7	No	99
POSITION	4	LADDER	6	No	253
CYCLES	5	LADDER	10	No	303
CONTROLS	6	LADDER	2	No	58


Data File List


Name	Number	Type	Scope	Debug	Words	Elements	Last
OUTPUT	0	O	Global	No	12	4	O:3
INPUT	1	I	Global	No	18	6	I:5
STATUS	2	S	Global	No	0	66	S:65
BINARY	3	B	Global	No	5	5	B3:4
TIMER	4	T	Global	No	9	3	T4:2
COUNTER	5	C	Global	No	3	1	C5:0
CONTROL	6	R	Global	No	3	1	R6:0
INTEGER	7	N	Global	No	2	2	N7:1
FLOAT	8	F	Global	No	2	1	F8:0

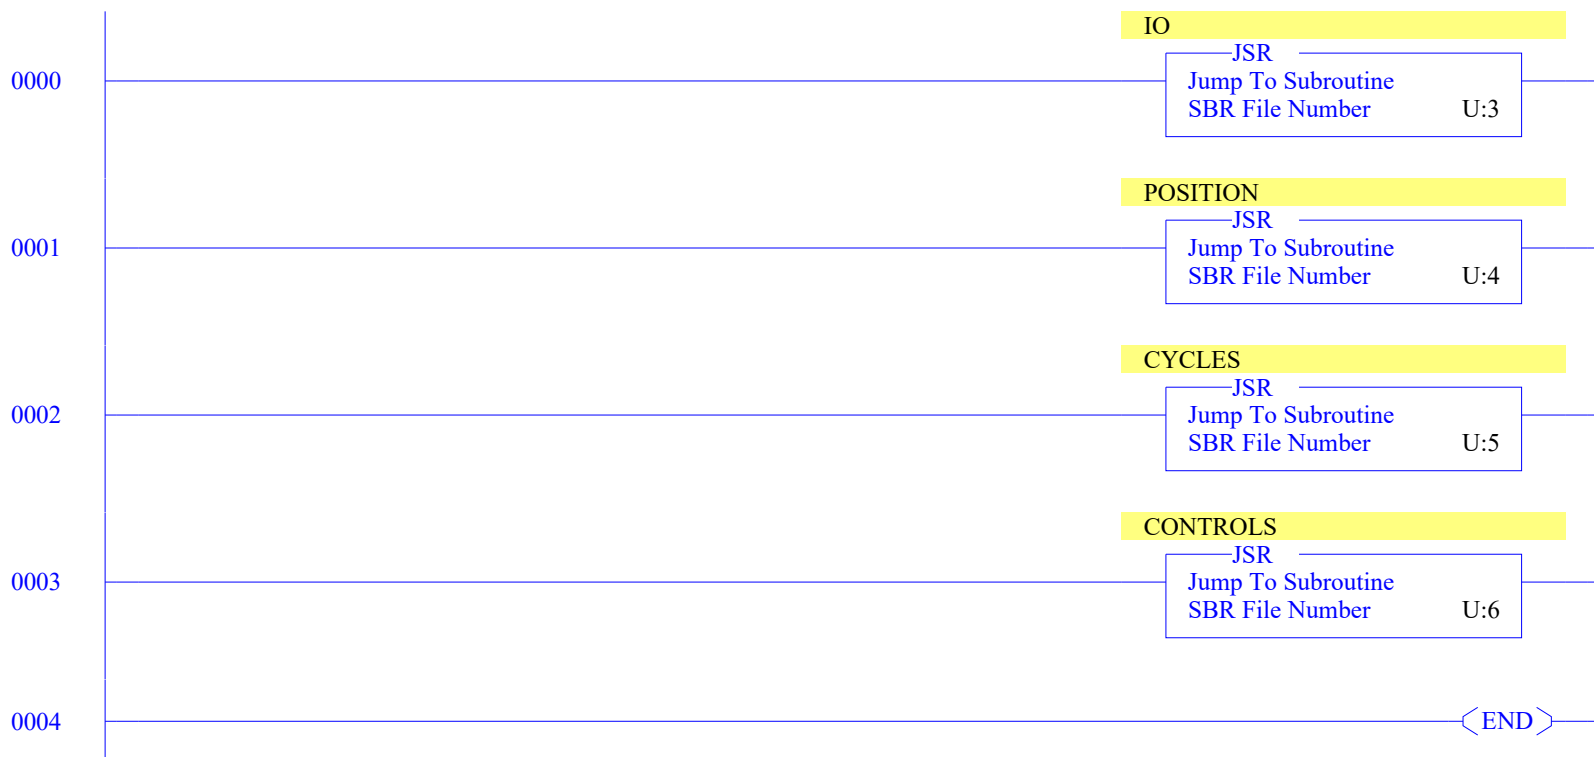


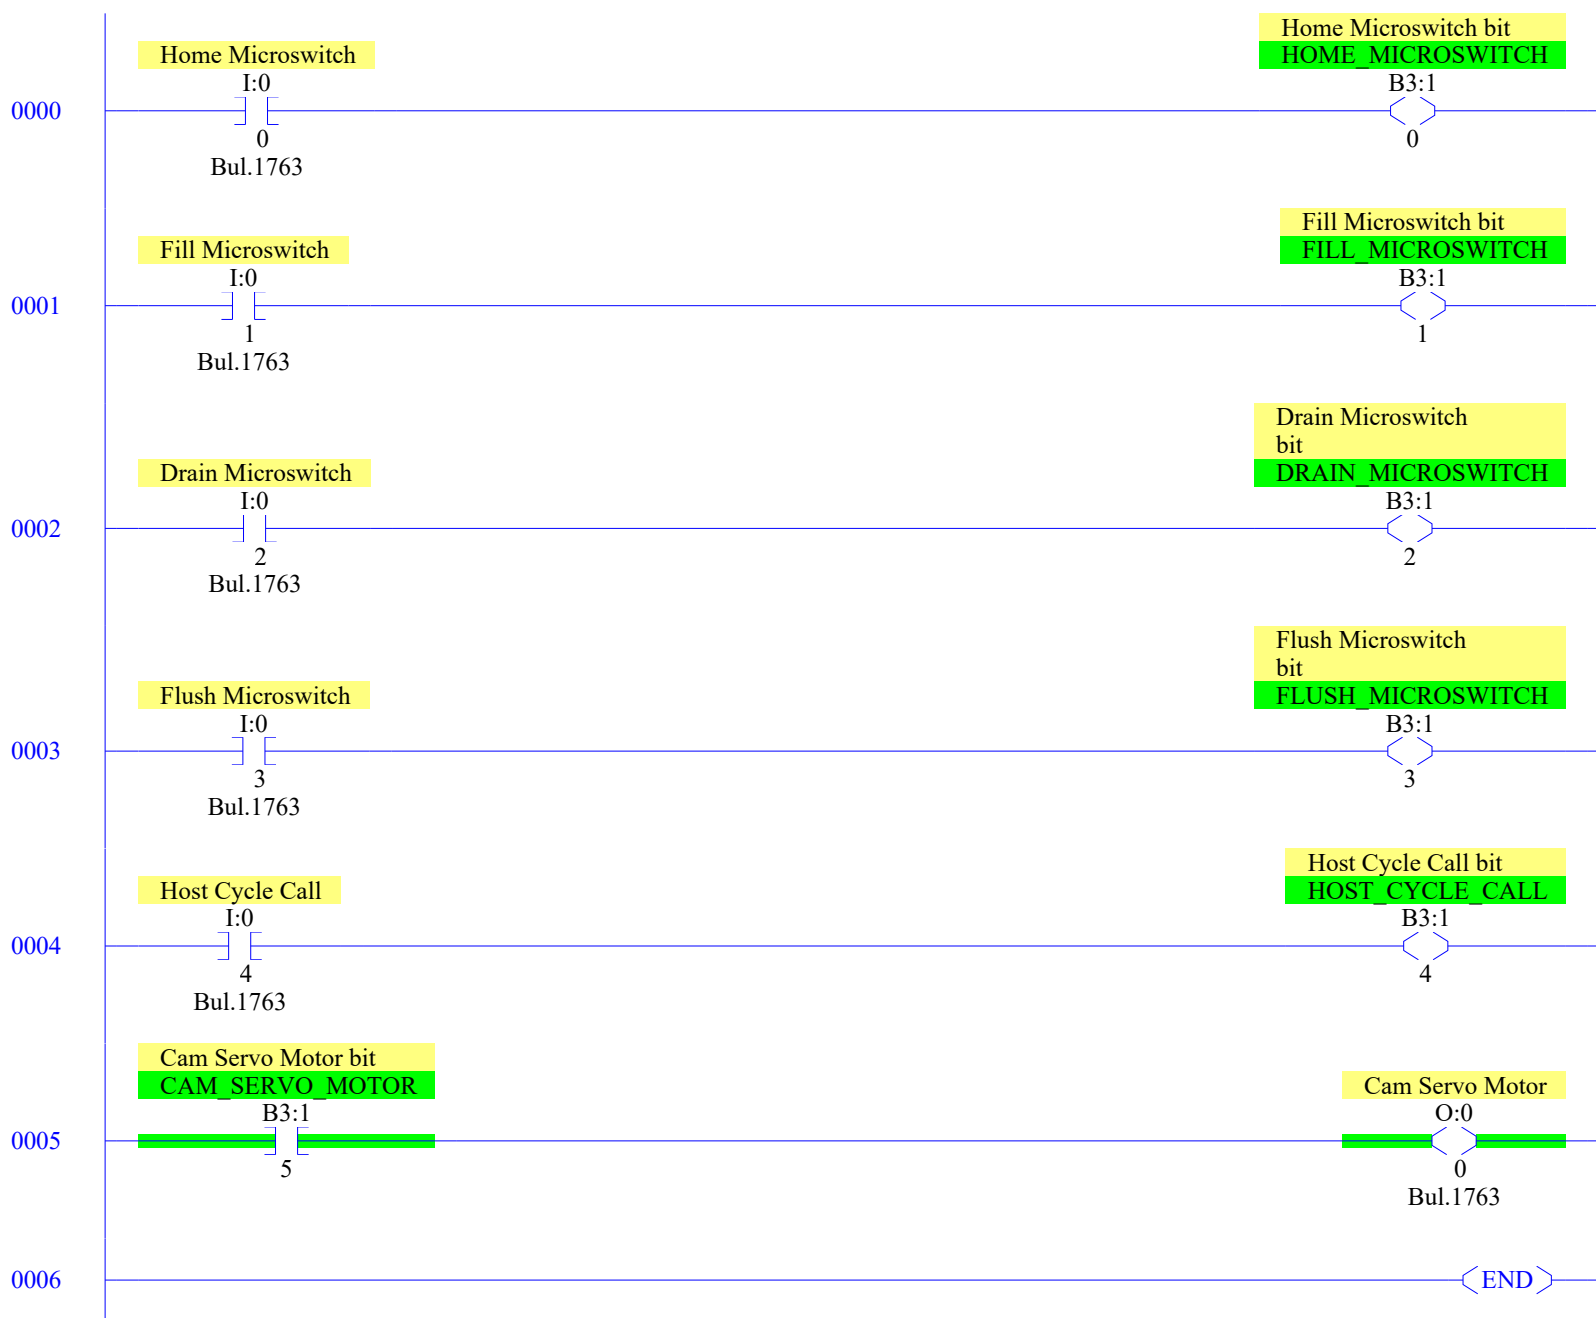


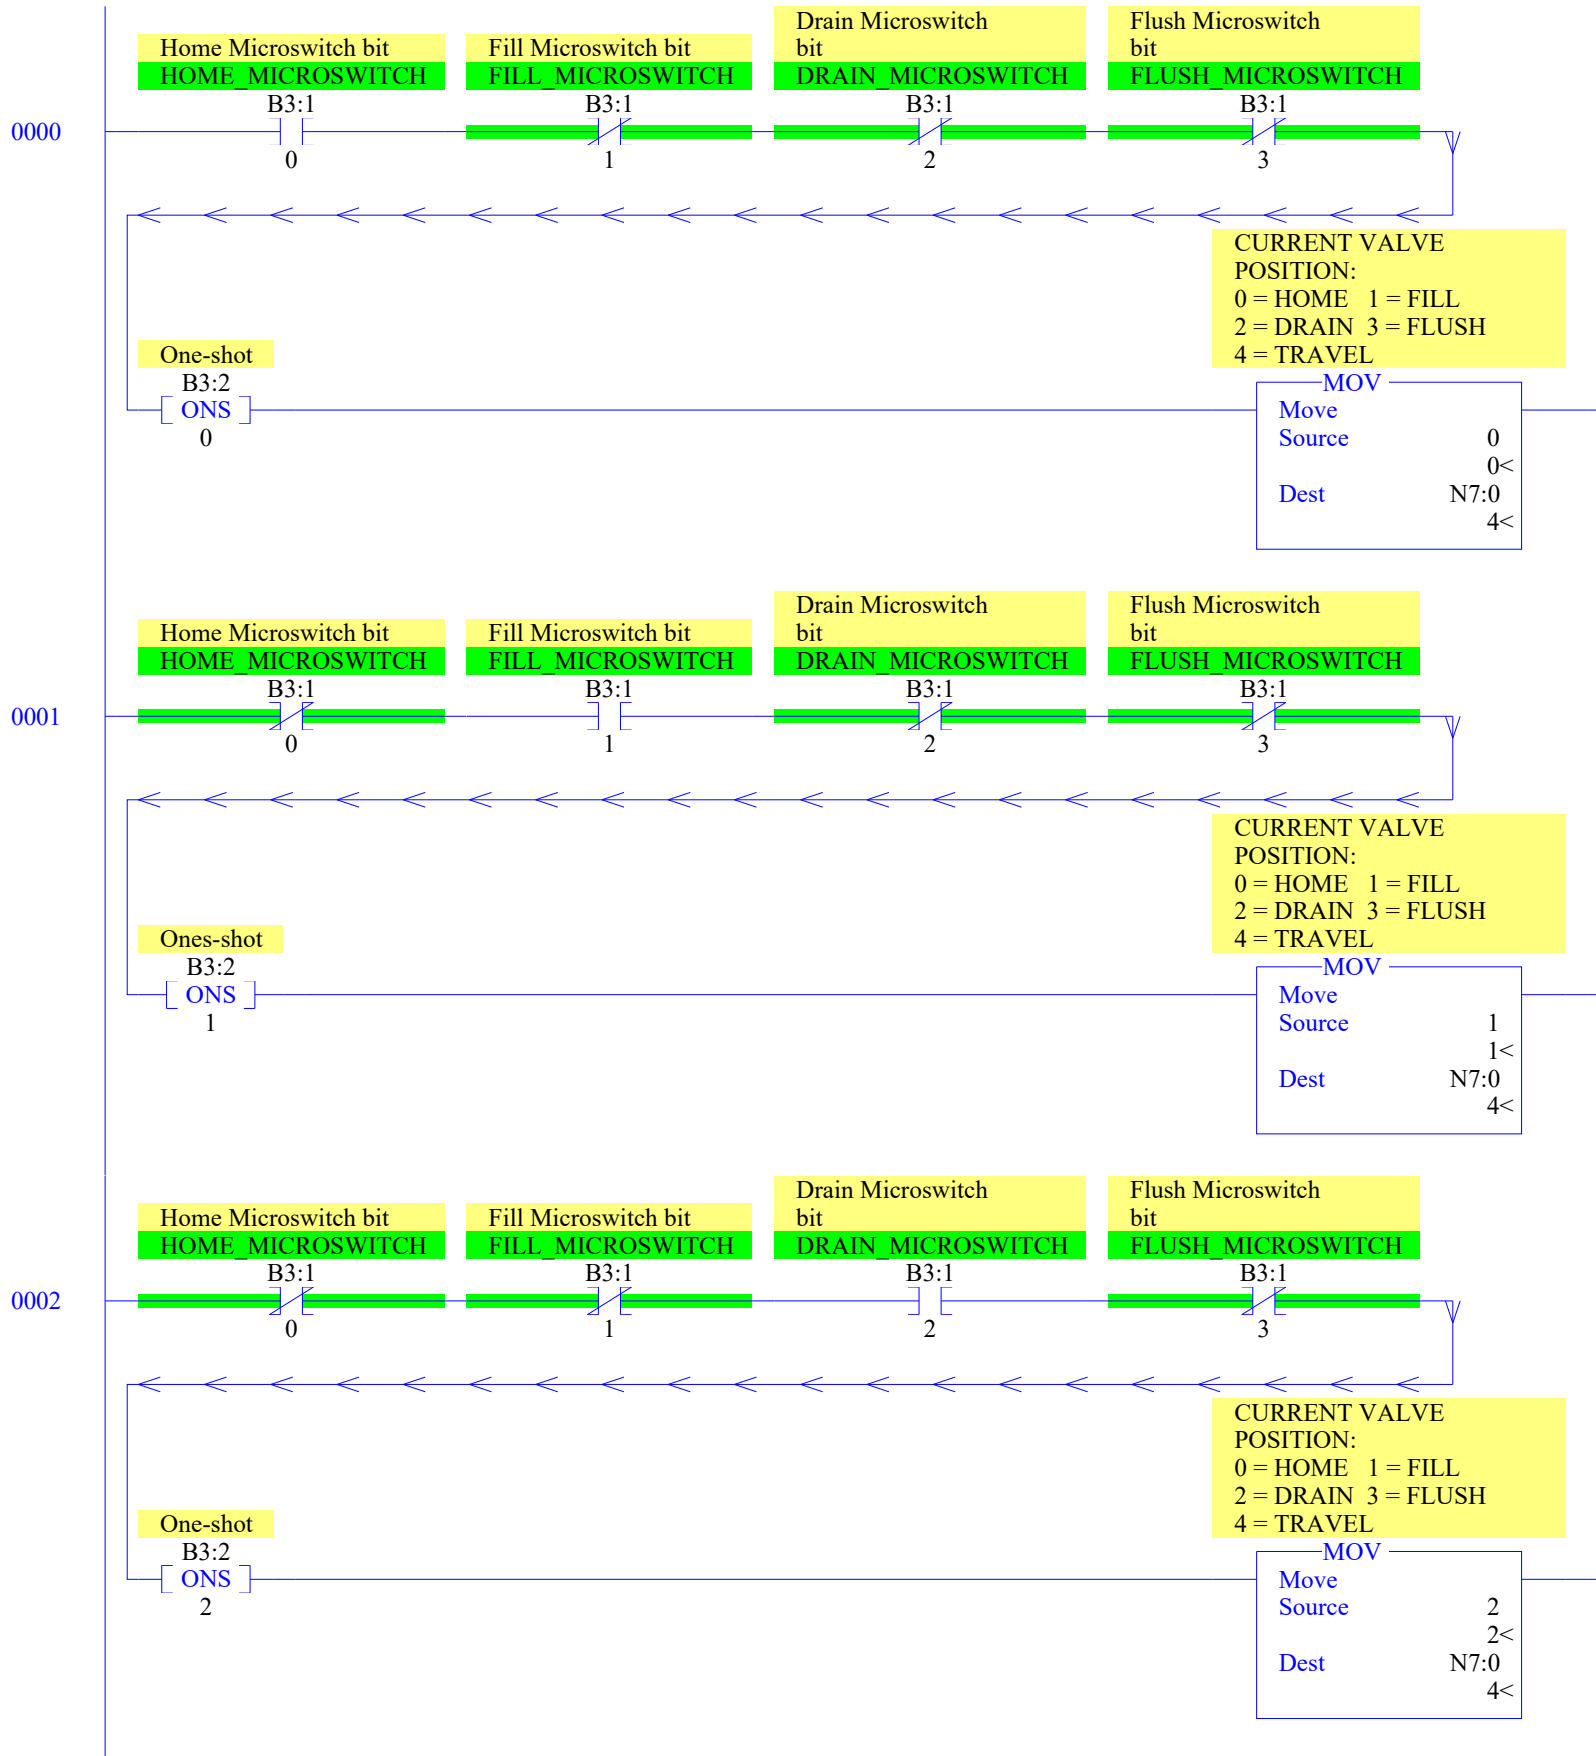

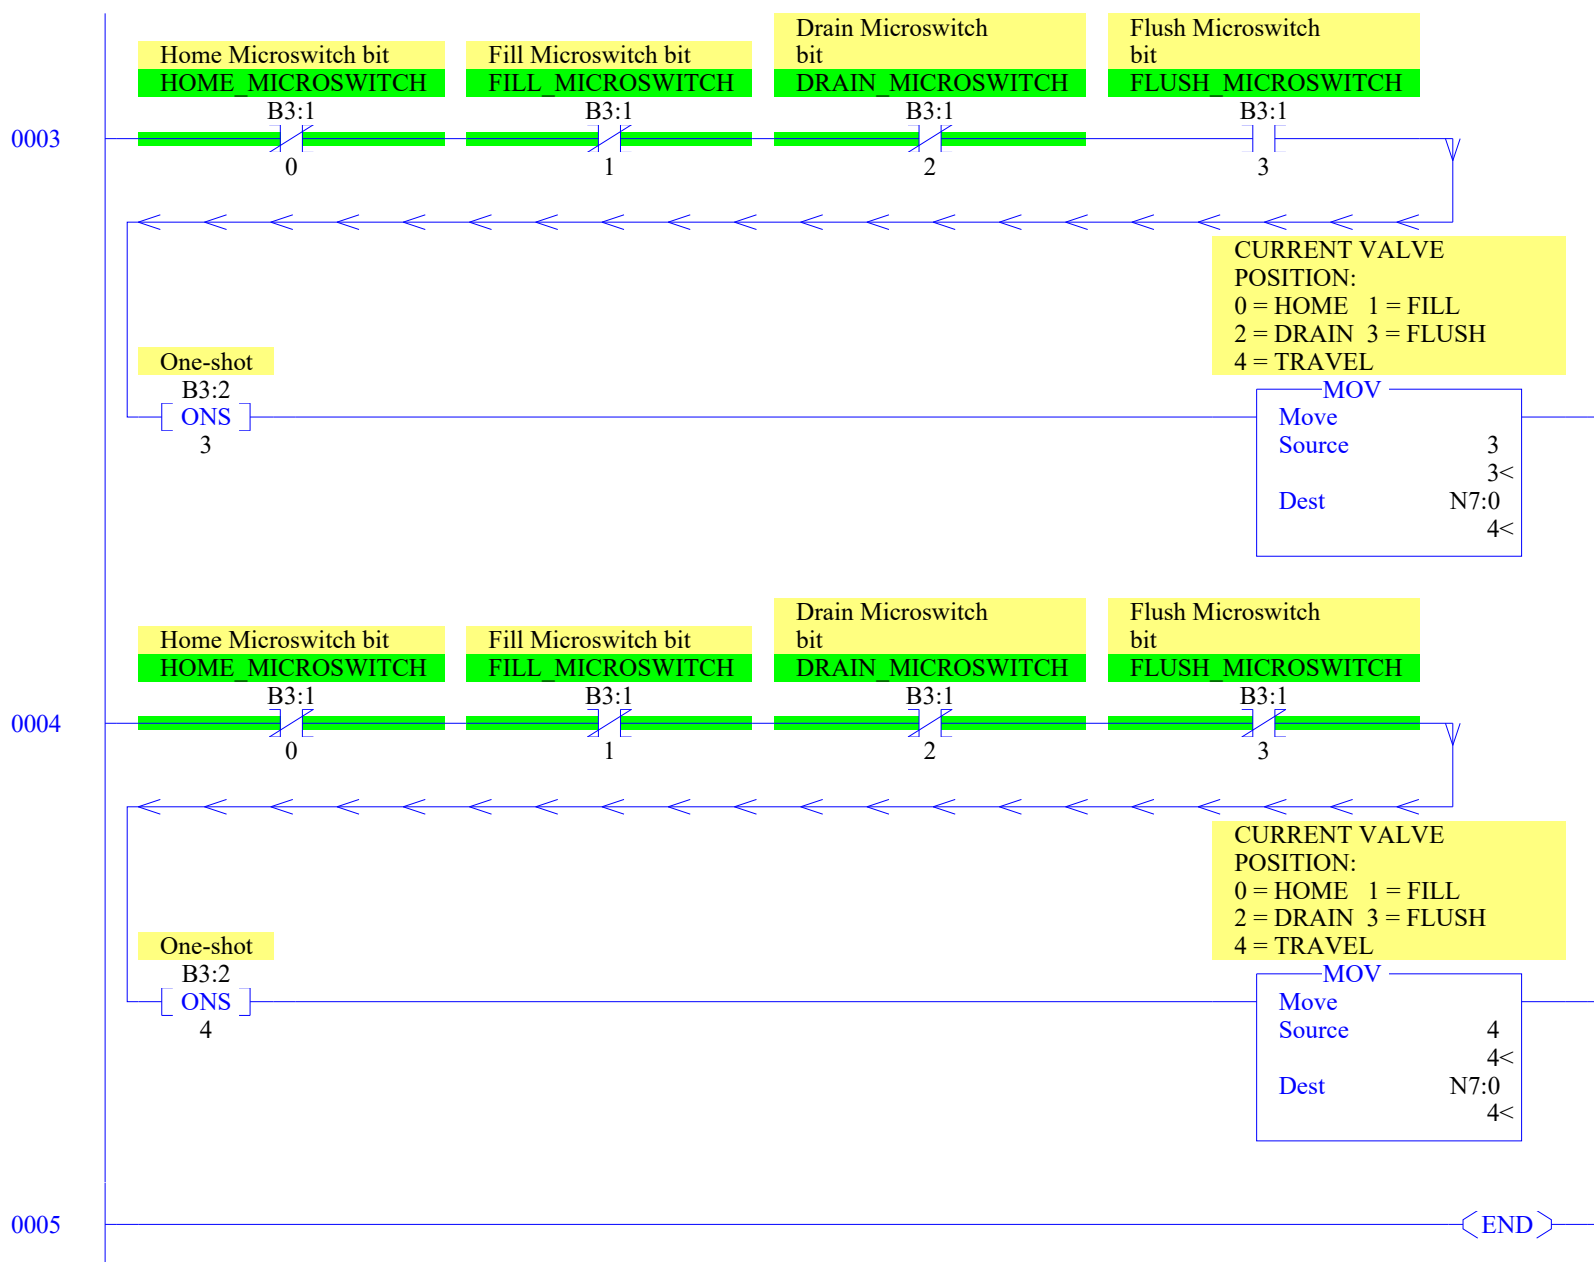

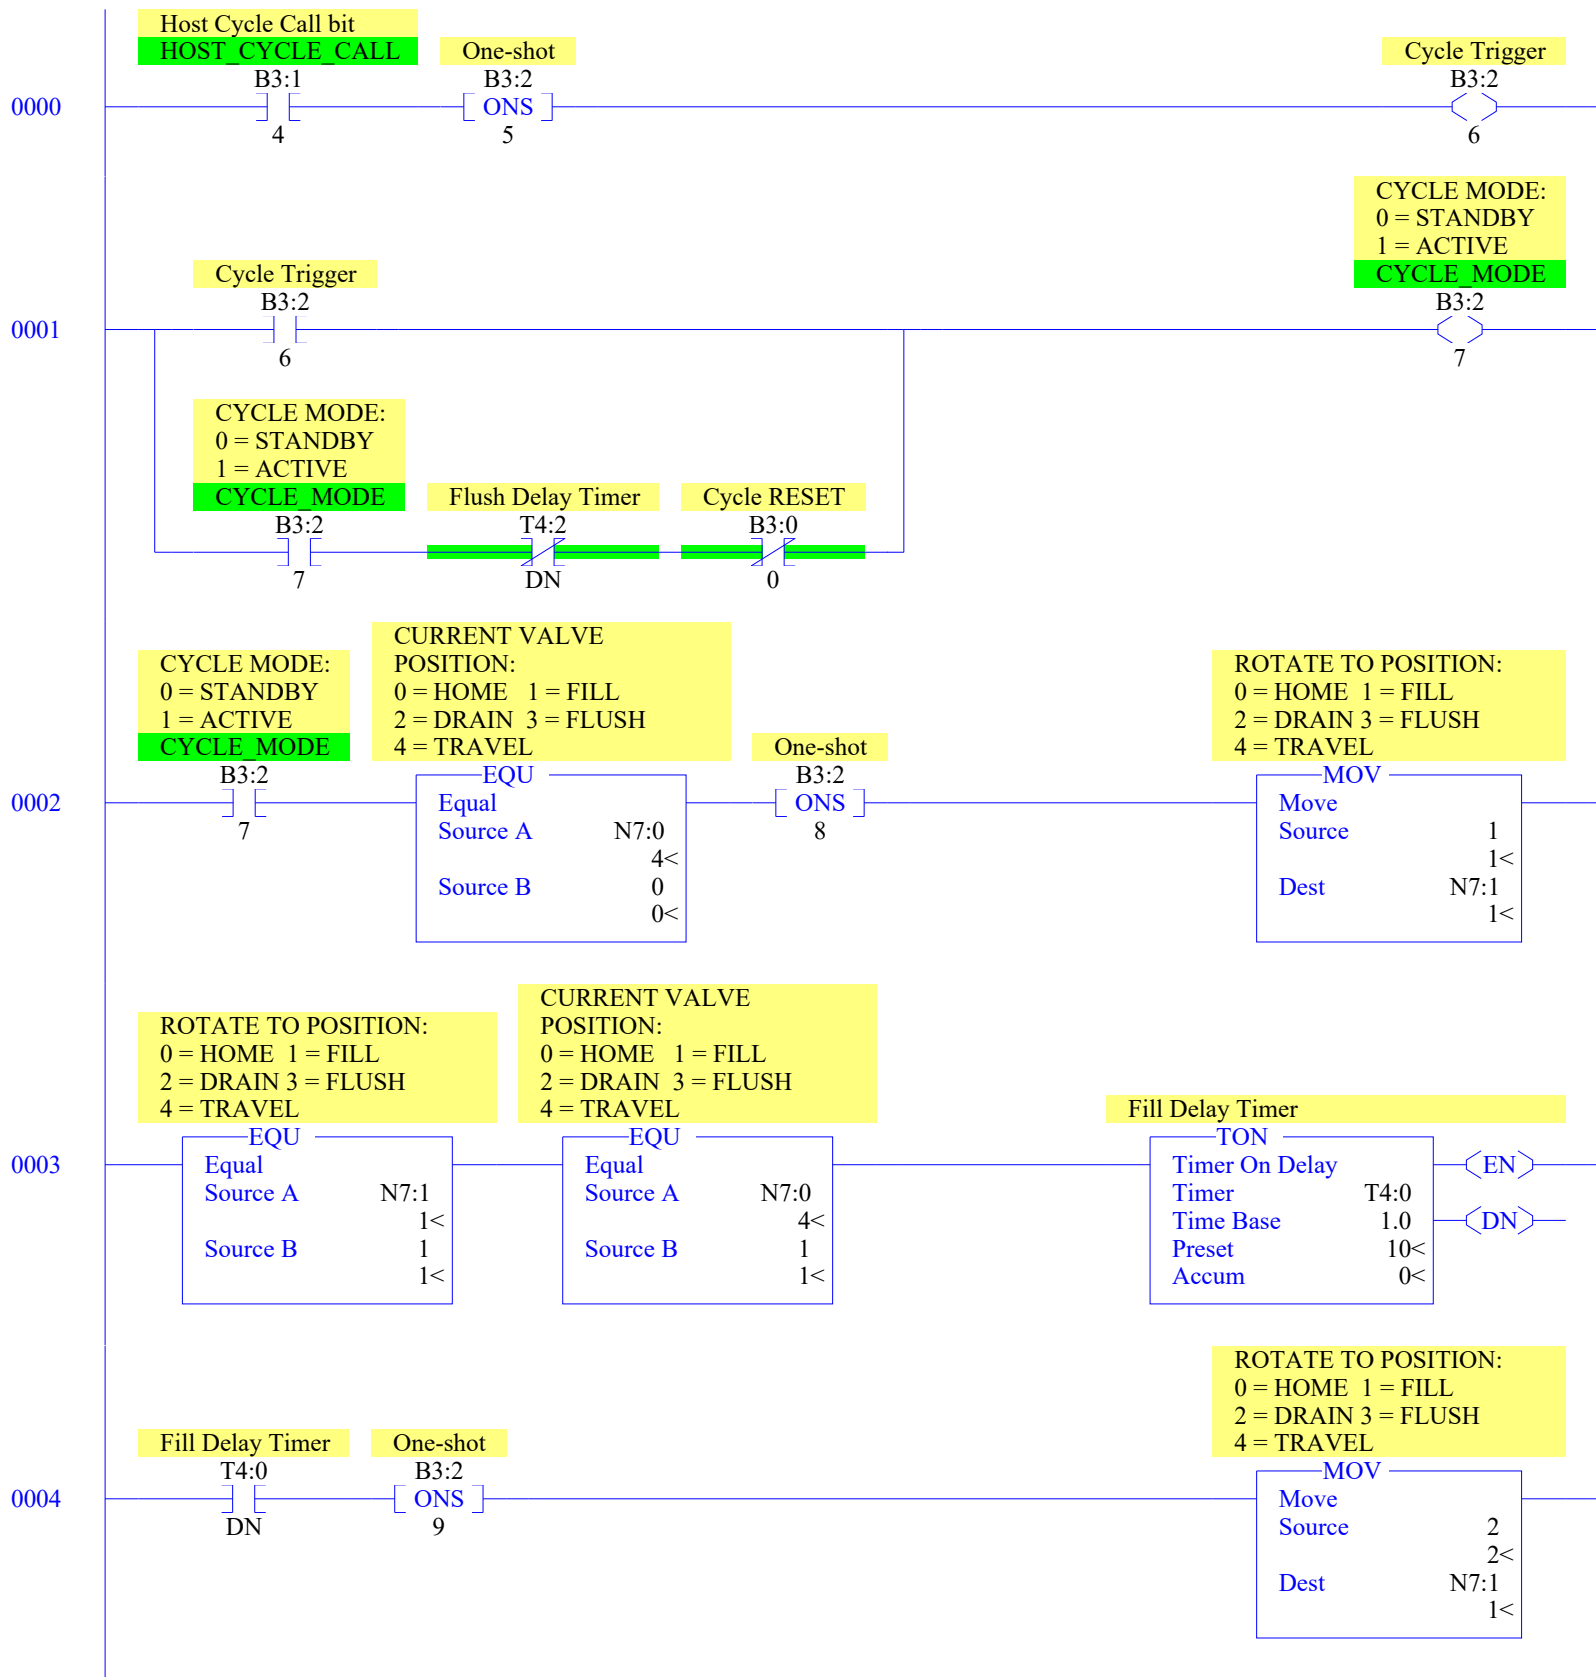

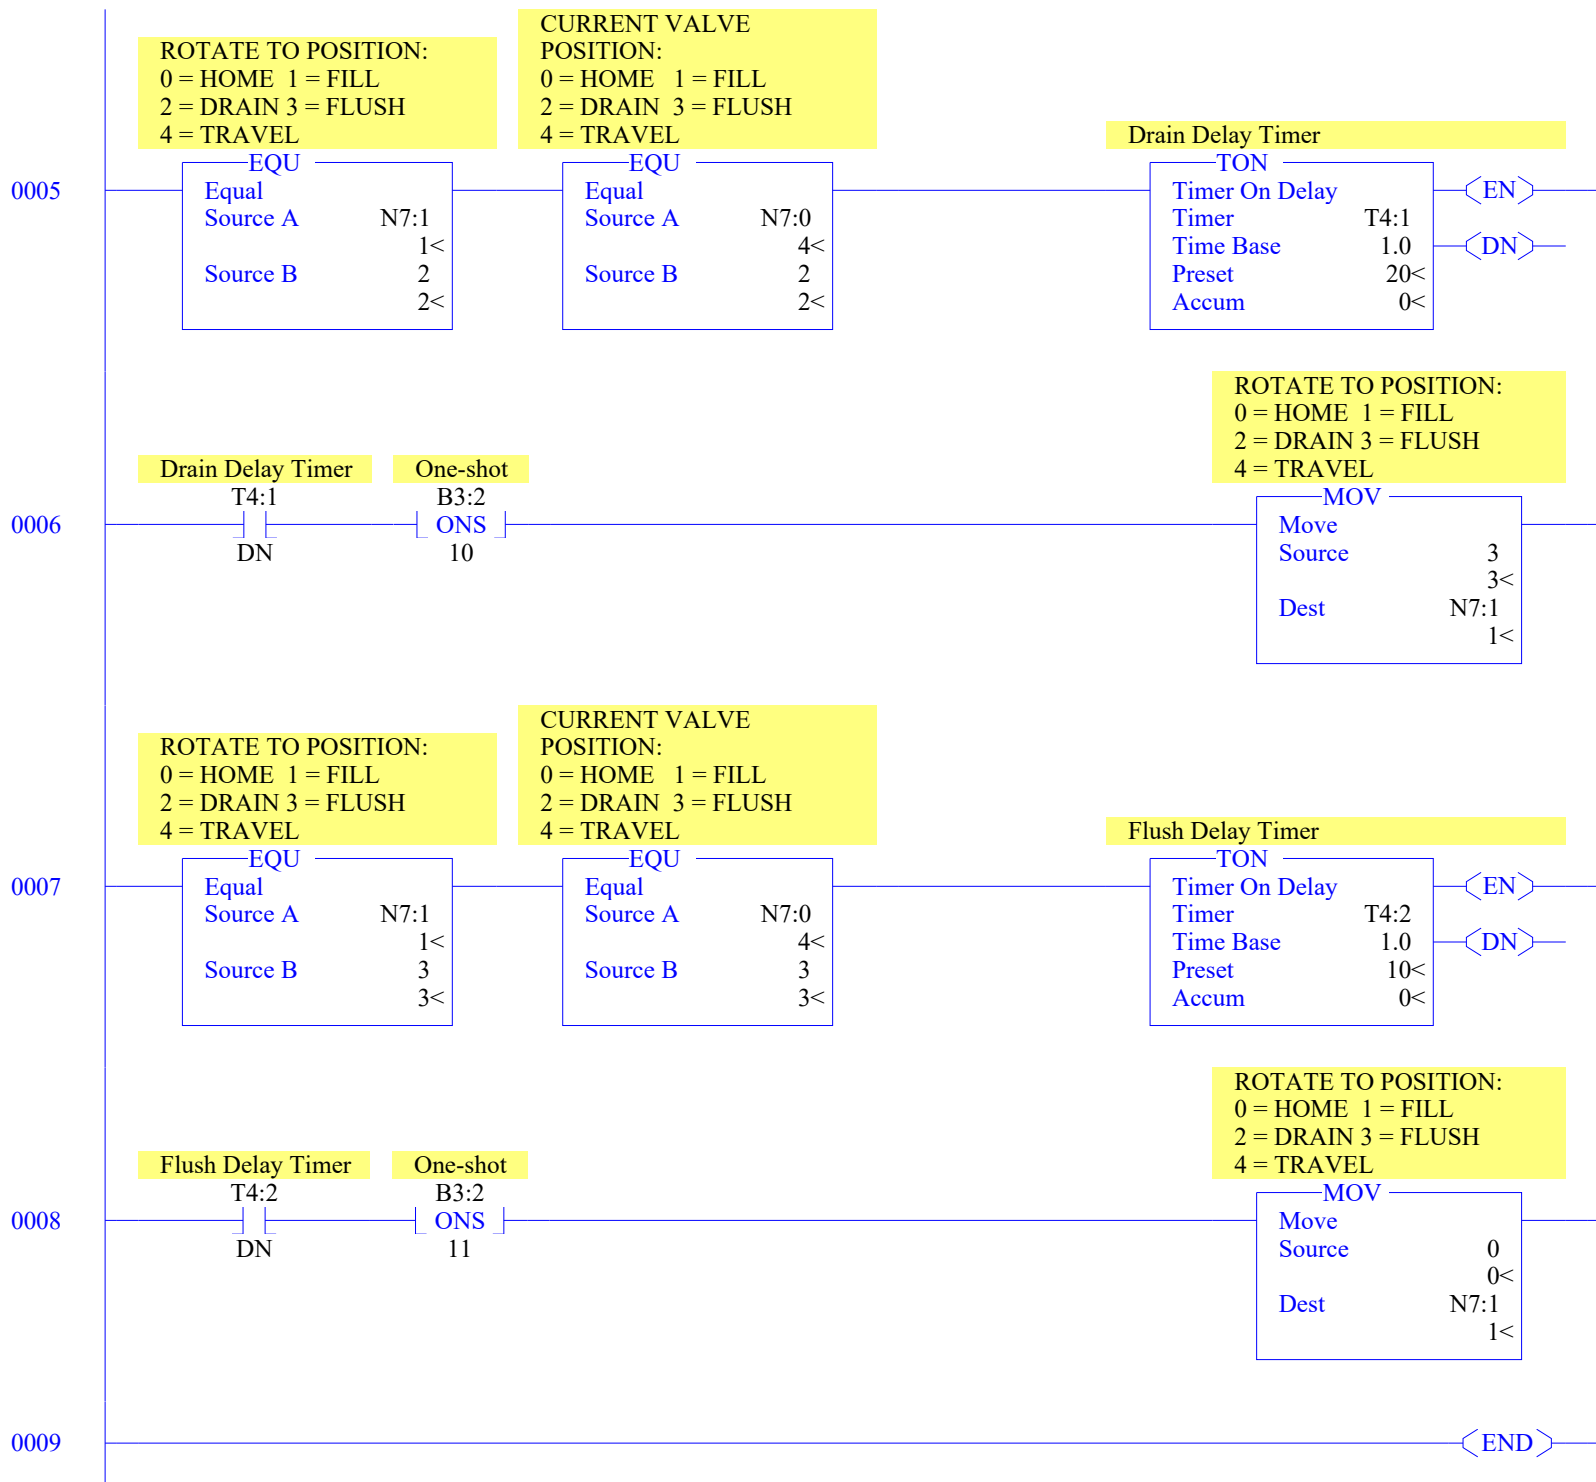

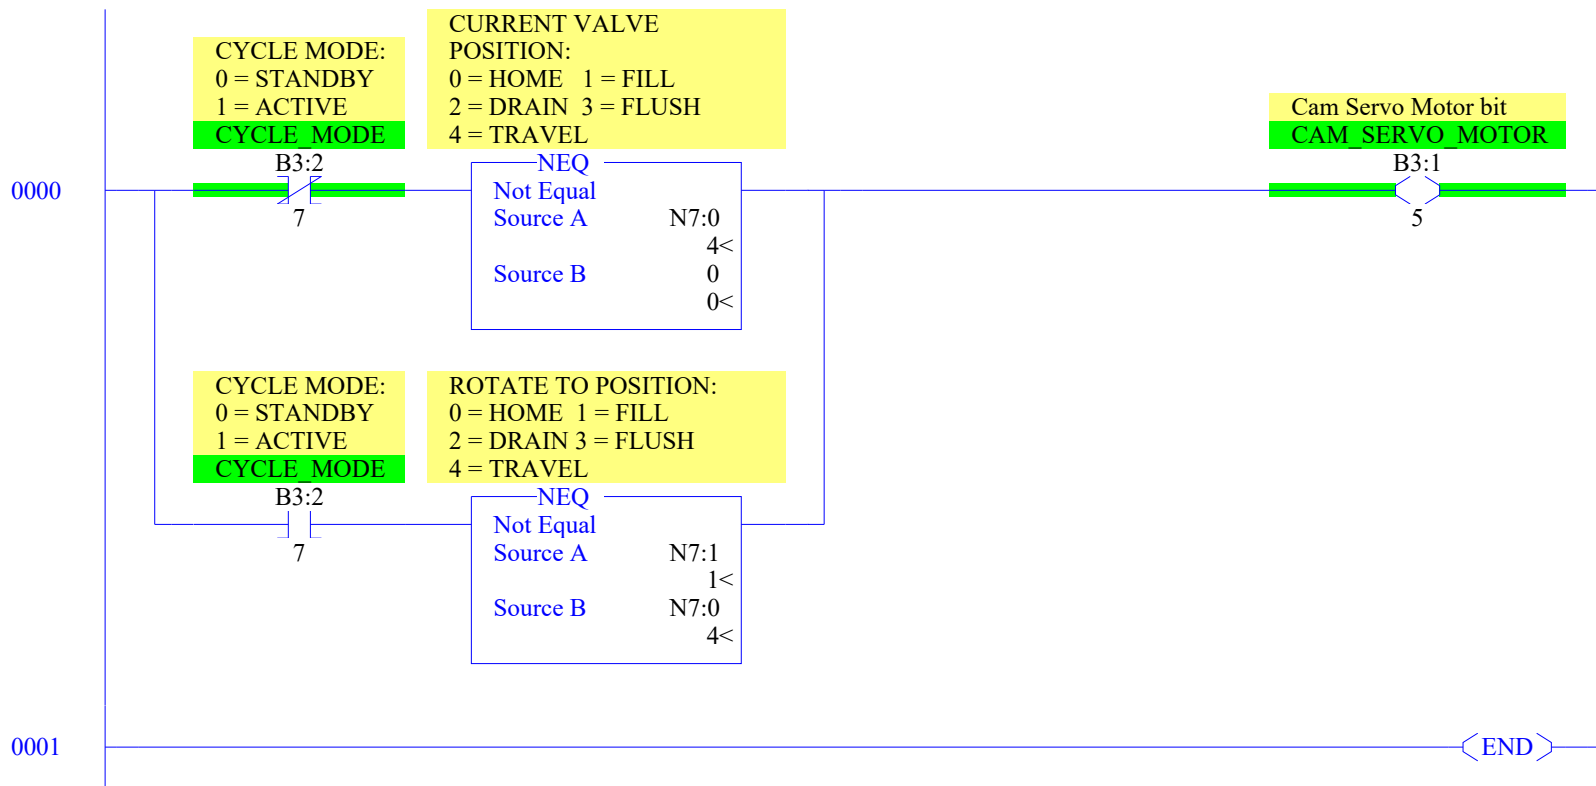

Offset	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				
O:0.0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	Bul.1763	MicroLogix	1100	Series B
O:0.1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Bul.1763	MicroLogix	1100	Series B
O:0.2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Bul.1763	MicroLogix	1100	Series B
O:0.3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Bul.1763	MicroLogix	1100	Series B

Offset	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0					
I:0.0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Bul.1763	MicroLogix	1100	Series	B
I:0.1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Bul.1763	MicroLogix	1100	Series	B
I:0.2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Bul.1763	MicroLogix	1100	Series	B
I:0.3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Bul.1763	MicroLogix	1100	Series	B
I:0.4	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Bul.1763	MicroLogix	1100	Series	B-Analog
I:0.5	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Bul.1763	MicroLogix	1100	Series	B-Analog

Main

Processor Mode S:1/0 - S:1/4 = Remote Program Mode
On Power up Go To Run (Mode Behavior) S:1/12 = 0
First Pass S:1/15 = No
Free Running Clock S:4 = 0001-1001-0101-1110

Proc

OS Catalog Number S:57 = 1100 User Program Type S:63 = 8001h
OS Series S:58 = B Compiler Revision Number S:64 =
OS FRS S:59 =
Processor Catalog Number S:60 =
Processor Series S:61 = A
Processor FRN S:62 =

Scan Times

Maximum (x10 ms) S:22 = 19
Watchdog (x10 ms) S:3 (high byte) = 10
Last 100 uSec Scan Time S:35 = 0
Scan Toggle Bit S:33/9 = 0

Math

Math Overflow Selected S:2/14 = 0 Math Register (lo word) S:13 = 0
Overflow Trap S:5/0 = 0 Math Register (high word) S:14-S:13 = 0
Carry S:0/0 = 0 Math Register (32 Bit) S:14-S:13 = 0
Overflow S:0/1 = 0
Zero Bit S:0/2 = 0
Sign Bit S:0/3 = 0

Chan 0

Processor Mode S:1/0- S:1/4 = Remote Program Mode
Node Address S:15 (low byte) = 0 Outgoing Msg Cmd Pending S:33/2 = 0
Baud Rate S:15 (high byte) = ?
Channel Mode S:33/3 = 0
Comms Active S:33/4 = 0
Incoming Cmd Pending S:33/0 = 0
Msg Reply Pending S:33/1 = 0

Debug

Suspend Code S:7 = 0
Suspend File S:8 = 0

Errors

Fault Override At Power Up S:1/8 = 0 Fault Routine S:29 = 0
Startup Protection Fault S:1/9 = 0 Major Error S:6 = 0h
Major Error Halt S:1/13 = 0
Overflow Trap S:5/0 = 0 Error Description:
Control Register Error S:5/2 = 0
Major Error Executing User Fault Rtn. S:5/3 = 0
Battery Low S:5/11 = 0
Input Filter Selection Modified S:5/13 = 0
ASCII String Manipulation error S:5/15 = 0

Protection

Deny Future Access S:1/14 = No
Data File Overwrite Protection Lost S:36/10 = False

Mem Module

Memory Module Loaded On Boot S:5/8 = 0
Password Mismatch S:5/9 = 0
Load Memory Module On Memory Error S:1/10 = 0
Load Memory Module Always S:1/11 = 0
On Power up Go To Run (Mode Behavior) S:1/12 = 0
Program Compare S:2/9 = 0
Data File Overwrite Protection Lost S:36/10 = 0

Forces

Forces Enabled S:1/5 = Yes
Forces Installed S:1/6 = No

Offset	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	(Symbol)	Description
B3:0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
B3:1	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0		
B3:2	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0		
B3:3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
B3:4	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		

Offset	EN	TT	DN	BASE	PRE	ACC	(Symbol) Description
T4:0	0	0	0	1.0 sec	10	0	Fill Delay Timer
T4:1	0	0	0	1.0 sec	20	0	Drain Delay Timer
T4:2	0	0	0	1.0 sec	10	0	Flush Delay Timer

Offset	CU	CD	DN	OV	UN	UA	PRE	ACC	(Symbol)	Description
C5:0	0	0	0	0	0	0	0	0		

Offset	EN	EU	DN	EM	ER	UL	IN	FD	LEN	POS	(Symbol)	Description
R6:0	0	0	0	0	0	0	0	0	0	0		

Offset	0	1	2	3	4	5	6	7	8	9
N7:0	4	1								

Offset	0	1	2	3	4
F8:0	0				

Address/Symbol Database

Address	Symbol	Scope	Description	Sym Group
B3:0/0			Cycle RESET	
B3:0/1				
B3:1/0	HOME_MICROSWITCH	Global	Home Microswitch bit	
B3:1/1	FILL_MICROSWITCH	Global	Fill Microswitch bit	
B3:1/2	DRAIN_MICROSWITCH	Global	Drain Microswitch bit	
B3:1/3	FLUSH_MICROSWITCH	Global	Flush Microswitch bit	
B3:1/4	HOST_CYCLE_CALL	Global	Host Cycle Call bit	
B3:1/5	CAM_SERVO_MOTOR	Global	Cam Servo Motor bit	
B3:2/0			One-shot	
B3:2/1			Ones-shot	
B3:2/2			One-shot	
B3:2/3			One-shot	
B3:2/4			One-shot	
B3:2/5			One-shot	
B3:2/6			Cycle Trigger	
B3:2/7	CYCLE_MODE	Global	CYCLE MODE: 0 = STANDBY 1 = ACTIVE	
B3:2/8			One-shot	
B3:2/9			One-shot	
B3:2/10			One-shot	
B3:2/11			One-shot	
I:0/0			Home Microswitch	
I:0/1			Fill Microswitch	
I:0/2			Drain Microswitch	
I:0/3			Flush Microswitch	
I:0/4			Host Cycle Call	
N7:0			CURRENT VALVE POSITION: 0 = HOME 1 = FILL 2 = DRAIN 3 = FLUSH 4 = TRAVEL	
N7:1			ROTATE TO POSITION: 0 = HOME 1 = FILL 2 = DRAIN 3 = FLUSH 4 = TRAVEL	
O:0/0			Cam Servo Motor	
S:0			Arithmetic Flags	
S:0/0			Processor Arithmetic Carry Flag	
S:0/1			Processor Arithmetic Underflow/ Overflow Flag	
S:0/2			Processor Arithmetic Zero Flag	
S:0/3			Processor Arithmetic Sign Flag	
S:1			Processor Mode Status/ Control	
S:1/0			Processor Mode Bit 0	
S:1/1			Processor Mode Bit 1	
S:1/2			Processor Mode Bit 2	
S:1/3			Processor Mode Bit 3	
S:1/4			Processor Mode Bit 4	
S:1/5			Forces Enabled	
S:1/6			Forces Present	
S:1/7			Comms Active	
S:1/8			Fault Override at Powerup	
S:1/9			Startup Protection Fault	
S:1/10			Load Memory Module on Memory Error	
S:1/11			Load Memory Module Always	
S:1/12			Load Memory Module and RUN	
S:1/13			Major Error Halted	
S:1/14			Access Denied	
S:1/15			First Pass	
S:2/0			STI Pending	
S:2/1			STI Enabled	
S:2/2			STI Executing	
S:2/3			Index Addressing File Range	
S:2/4			Saved with Debug Single Step	
S:2/5			DH-485 Incoming Command Pending	
S:2/6			DH-485 Message Reply Pending	
S:2/7			DH-485 Outgoing Message Command Pending	
S:2/15			Comms Servicing Selection	
S:3			Current Scan Time/ Watchdog Scan Time	
S:4			Time Base	
S:5/0			Overflow Trap	
S:5/2			Control Register Error	
S:5/3			Major Err Detected Executing UserFault Routine	
S:5/4			M0-M1 Referenced on Disabled Slot	
S:5/8			Memory Module Boot	
S:5/9			Memory Module Password Mismatch	
S:5/10			STI Overflow	
S:5/11			Battery Low	
S:6			Major Error Fault Code	
S:7			Suspend Code	
S:8			Suspend File	
S:9			Active Nodes	
S:10			Active Nodes	
S:11			I/O Slot Enables	
S:12			I/O Slot Enables	
S:13			Math Register	
S:14			Math Register	
S:15			Node Address/ Baud Rate	
S:16			Debug Single Step Rung	
S:17			Debug Single Step File	
S:18			Debug Single Step Breakpoint Rung	
S:19			Debug Single Step Breakpoint File	
S:20			Debug Fault/ Powerdown Rung	
S:21			Debug Fault/ Powerdown File	

Address/Symbol Database

Address	Symbol	Scope	Description	Sym Group
S:22			Maximum Observed Scan Time	
S:23			Average Scan Time	
S:24			Index Register	
S:25			I/O Interrupt Pending	
S:26			I/O Interrupt Pending	
S:27			I/O Interrupt Enabled	
S:28			I/O Interrupt Enabled	
S:29			User Fault Routine File Number	
S:30			STI Setpoint	
S:31			STI File Number	
S:32			I/O Interrupt Executing	
S:33			Extended Proc Status Control Word	
S:33/0			Incoming Command Pending	
S:33/1			Message Reply Pending	
S:33/2			Outgoing Message Command Pending	
S:33/3			Selection Status User/DF1	
S:33/4			Communicat Active	
S:33/5			Communicat Servicing Selection	
S:33/6			Message Servicing Selection Channel 0	
S:33/7			Message Servicing Selection Channel 1	
S:33/8			Interrupt Latency Control Flag	
S:33/9			Scan Toggle Flag	
S:33/10			Discrete Input Interrupt Reconfigur Flag	
S:33/11			Online Edit Status	
S:33/12			Online Edit Status	
S:33/13			Scan Time Timebase Selection	
S:33/14			DTR Control Bit	
S:33/15			DTR Force Bit	
S:34			Pass-thru Disabled	
S:34/0			Pass-Thru Disabled Flag	
S:34/1			DH+ Active Node Table Enable Flag	
S:34/2			Floating Point Math Flag Disable,Fl	
S:35			Last 1 ms Scan Time	
S:36			Extended Minor Error Bits	
S:36/8			DII Lost	
S:36/9			STI Lost	
S:36/10			Memory Module Data File Overwrite Protection	
S:37			Clock Calendar Year	
S:38			Clock Calendar Month	
S:39			Clock Calendar Day	
S:40			Clock Calendar Hours	
S:41			Clock Calendar Minutes	
S:42			Clock Calendar Seconds	
S:43			STI Interrupt Time	
S:44			I/O Event Interrupt Time	
S:45			DII Interrupt Time	
S:46			Discrete Input Interrupt- File Number	
S:47			Discrete Input Interrupt- Slot Number	
S:48			Discrete Input Interrupt- Bit Mask	
S:49			Discrete Input Interrupt- Compare Value	
S:50			Processor Catalog Number	
S:51			Discrete Input Interrupt- Return Number	
S:52			Discrete Input Interrupt- Accumulat	
S:53			Reserved/ Clock Calendar Day of the Week	
S:55			Last DII Scan Time	
S:56			Maximum Observed DII Scan Time	
S:57			Operating System Catalog Number	
S:58			Operating System Series	
S:59			Operating System FRN	
S:61			Processor Series	
S:62			Processor Revision	
S:63			User Program Type	
S:64			User Program Functional Index	
S:65			User RAM Size	
S:66			Flash EEPROM Size	
S:67			Channel 0 Active Nodes	
S:68			Channel 0 Active Nodes	
S:69			Channel 0 Active Nodes	
S:70			Channel 0 Active Nodes	
S:71			Channel 0 Active Nodes	
S:72			Channel 0 Active Nodes	
S:73			Channel 0 Active Nodes	
S:74			Channel 0 Active Nodes	
S:75			Channel 0 Active Nodes	
S:76			Channel 0 Active Nodes	
S:77			Channel 0 Active Nodes	
S:78			Channel 0 Active Nodes	
S:79			Channel 0 Active Nodes	
S:80			Channel 0 Active Nodes	
S:81			Channel 0 Active Nodes	
S:82			Channel 0 Active Nodes	
S:83			DH+ Active Nodes	
S:84			DH+ Active Nodes	
S:85			DH+ Active Nodes	
S:86			DH+ Active Nodes	

Address/Symbol Database

Address	Symbol	Scope	Description	Sym Group
T4:0			Fill Delay Timer	
T4:0/DN				
T4:1			Drain Delay Timer	
T4:1/DN				
T4:2			Flush Delay Timer	
T4:2/DN				
U:3			IO	
U:4			POSITION	
U:5			CYCLES	
U:6			CONTROLS	

Address	Instruction	Description
---------	-------------	-------------

Symbol Group Database

Group_Name	Description
------------	-------------