
确认此型号所有图纸 签字确认:

因方便走线, 调整了逻辑代码, 请仔细确认图面, 逻辑

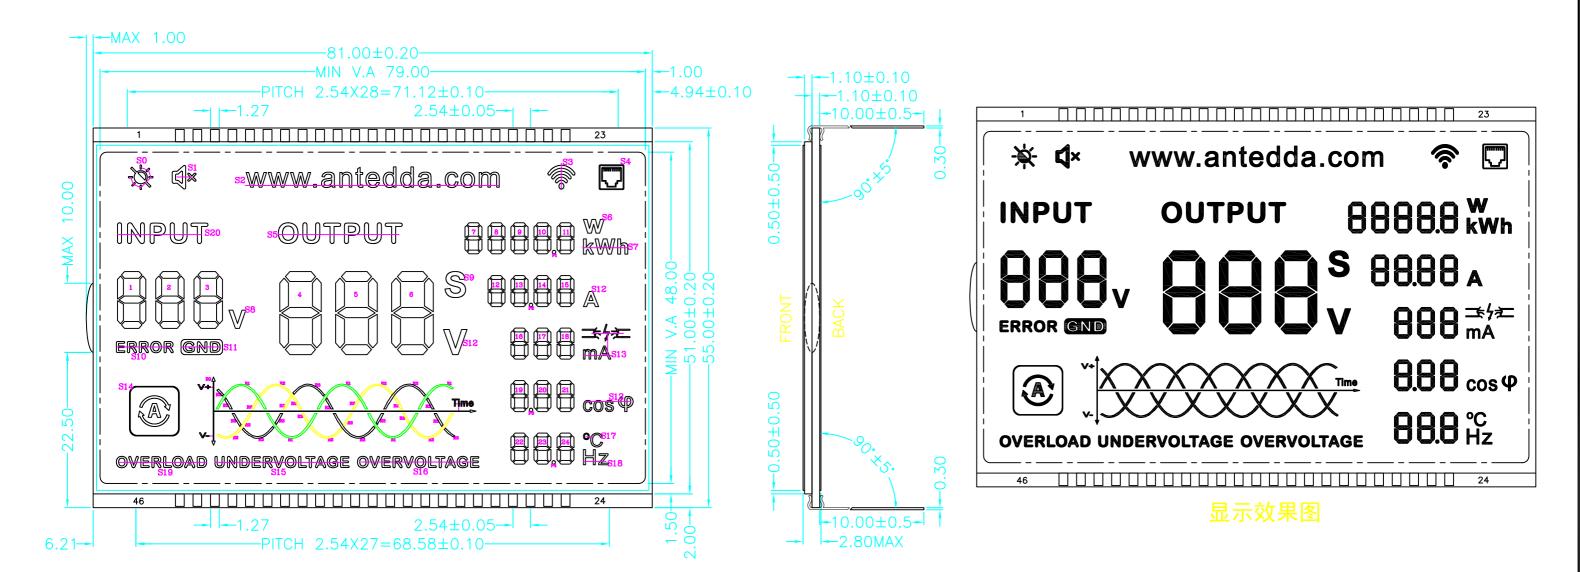

PIN	1	2	3	4	5	6	7	- 8	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46
COMO			T	T	T	T	T	-	·- C	сомо	S0	S1						S2					S3	S4																							
COM1			T	T	T	T		CO)M1				1A	2A	3A	S20	S5		S9	7A	8A	9A			10A	11A	12A	13A	14A	15A	16A	17A	18A	19A	20A	21A	24D	P4	SSD	COM1							
COM2							COM	2 -	-				1F	2F	3F	4A	5A		6A	7F	8F	9F			10F	11F	12F	13F	14F	15F	16F	17F	18F	19F	20F	21F	24C	23D	22C		COM2						
сомз					T	СОМ	3	· -	-	[1B	2B	3B	4F	5F		6F	7B	8B	9B			10B	11B	12B	13B	14B	15B	16B	17B	18B	19B	20B	21B	24E	23C	22E			сомз					
COM4					COM4	<u> </u>		· -	-				1G	2G	3G	4B	5B		6B	7G	8G	9G			10G	11G	12G	13G	14G	15G	16G	17G	18G	19G	20G	21G	24G	23E	22G				COM4				
COM5				СОМ	5	T	T	· -	-	[1E	2E	3E	4G	5G		6G	7E	8E	9E			10E	11E	12E	13E	14E	15E	16E	17E	18E	19E	20E	21E	24B	23G	22B					сом5			==
сом6			СОМ	3		T	T	· -	- T	[1C	2C	3C	4E	5E		6E	7C	8C	9C			10C	11C	12C	13C	14C	15C	16C	17C	18C	19C	20C	21C	24F	23B	22F						сом6		1
COM7		сом7	<u>' </u>	T	T	T	T ==	· [=	-				1D	2D	3D	4C	5C		6C	7D	8D	9D			10D	11D	12D	13D	14D	15D	16D	17D	18D	19D	20D	21D	24A	23F	22A		- -				(COM7	
сомв	сом8							· [-	-				S10	S11	S8	4D	5D		6D	S14	S19	S7			P1	S6	R1	R2	P2	S12	R3	R0	S13	S15	Р3	S16	S17	23A	S18								сом8

1. 显示类型		7. 驱动条件	1/9 DUTY 1/4 BIAS	DATE	REVISION RECORD	REV	HINORI TEC	HNO COLT	D	
2. 视向	120'CLOCK	8. 工作温度	0°C ~+50°C	06/06		В				
3. 工作电压	3.3 V	9. 储存温度	-10°C ∼+60°C				DRAWING NO.	ATD162	UNIT mm PRO	
4. 偏光片类型	TRANSMISSIVE	10. 客户资料								±0.20mm
5. 连接方式	PIN	44 D UC	なく "P 110" 亜土				DRAWING BY	CHECKED BY	APPROVED BY	PAGE
6. 丝印类型	NO	11. RoHS	符合"RoHS"要求				WEN 2023/06/05			1/2