


Worldwide Leader In Mixing Fluids Technology



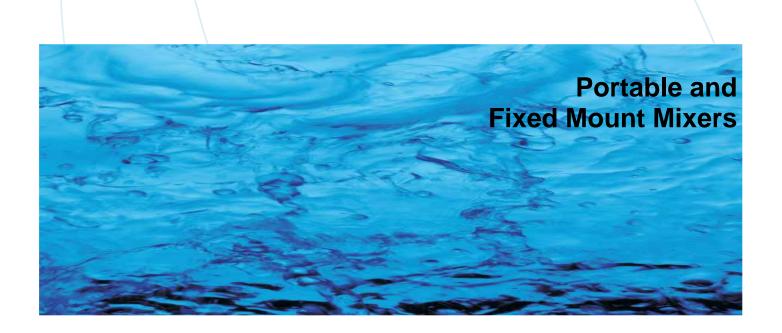

Neutrone® portable & fixed mounted mixers are designed ideally for agitation of small/big batches of light and medium from high flow to high shear for batch or continuous process which combine economy with quality and recognizes know how. Neutrone®®'s N1 & N3 mixers series are equipped with direct drive while N2 & N5 mixers series equipped with gear reduction which able to provide reliable performance in agitation application at an economical price, low operating cost effective and long lif operation.

Features of Neutrone® Mixer N1, N2, N3 & N5 Series

- Neutrone®'s High Efficiency/Axial Flow Impeller, NE-3, NB-3, etc
- All wetted parts in SS304/SS316. Other materials available upon request
- Direct drive for minimize maintenance (Applicable for N1 & N3 Series)
- Helical gear for long life, quiet and efficient operation (Applicable for N2 & N5 Series)
- Standard motor from 0.18kW to 7.5kW
- Rigid coupling (SS304/SS316) to provide stability for long shaft (Applicable for N2 & N5 Series)
- Bearing service rated over 100,000hrs (L-10)
- Single or double full cartridge mechanical seal, lip seal & stuffing box/gland packing available







A variety of models are available (N1X-YY, N2X-YY, N3X-YY & N5X-YY Series)

X = A
 Open tank with flat plate mounting
 X = J
 Open tank with clamp mounting

X = E — Open tank with Lip Seal

X = HB - Closed tank with Stuffing Box/Gland Packing


X = D - Closed tank with Single Full Cartridge Mechanical Seal

X – DS – Closed tank with Double Full Cartridge Mechanical Seal

YY – Motor Power, Example: 75 = 0.75kw, 750 = 7.5kW



Neutrone® Mixers, N2A Series

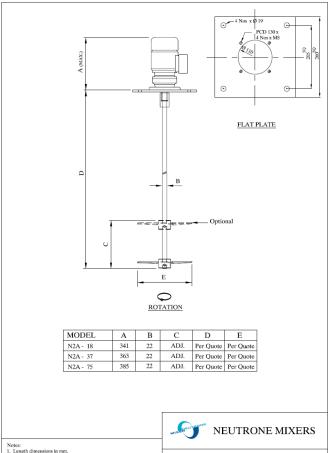


ference, unless certified ference, unless certified ference, unless certified ference and related information shown

are confidential and the property of TRIMAX CENTURY SDN
No use may be made without our written permision.

DRAWING NO. N2A-001

SCALE: NTS

Neutrone® Mixers, N5A Series



MODEL	A	В	C	D	E
N5A - 37	485	41	ADJ.	Per Quote	Per Quote
N5A - 75	498	41	ADJ.	Per Quote	Per Quote
N5A - 150	523	41	ADJ.	Per Quote	Per Quote
N5A - 220	562	41	ADJ.	Per Quote	Per Quote
N5A - 300	584	41	ADJ.	Per Quote	Per Quote
N5A - 400	590	41	ADJ.	Per Quote	Per Quote
N5A - 550	598	41	ADJ.	Per Quote	Per Quote
N5A - 750	610	41	ADJ.	Per Quote	Per Quote



Notes: 1. Length dimensions in mm.


All dimensions are for reference, unless certified
 All equipment, design, applications data, and related information show

TITLE: N5A GEAR DRIVE SERIES

DRAWING NO. N5A-002 SCALE : NTS



The above picture shown Neutrone $^{\! 8}$ fixed mounted mixer, model N2E-37 fitted with lip seal @ Singapore

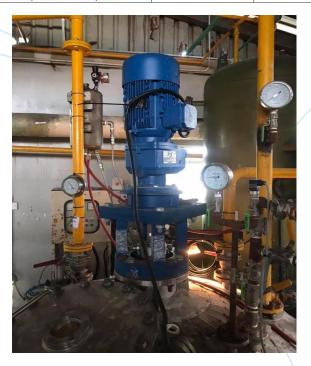

The above picture show Neutrone® fixed mounted mixer, Model N5DS-750, fitted with a double full cartridge mechanical seal c/w cooling lubricant from a seal lube pot @ Malaysia



Our Organization

Quality

We recognize that our customers demand a high quality product manufactured and serviced in a timely and efficient manner. Working within the process industry we are fully aware of the specific demands for quality standards

After Sales & Service Quality

Our dedicated direct service teams are readily available to support your process equipment at all times. Genuine spares and service solutions can be obtained from all our companies and ensure operating capacity of your valuable production equipment.

Warranty/Guarantee Quality

All our products are built to last and we provide warranty periods that are appropriate for the specific industries where the equipment is located.

YOUR LOCAL DISTRIBUTOR

