

ALL DIMENSIONS TO BE MEASURED OUT AND PEGGED ON SITE BEFORE COMMENCING WORK

ALL REINFORCED CONCRETE SLABS, FOUNDATIONS, COLUMN DETAILS, BEAMS, STAIRS AND RETAINING WALLS TO BE BUILT STRICTLY IN ACCORDANCE WITH ENGINEERS DETAIL AND UNDER HIS/HER SUPERVISION

BUILDING MUST BE IN ACCORDANCE WITH THE APPROVED BUILDING PLAN. NO CHANGES MAY BE MADE TO SUCH PLANS WITHOUT THE EXPRESSED CONSENT OF THE AUTHOR OF SUCH DOCUMENT

FLOORS, WALLS, GEYSER PIPES AND ROOFS TO BE INSULATED IN ACCORDANCE WITH SANS 10400

ARCHITECTURAL DRAWINGS TO BE READ IN CONJUNCTION WITH ENGINEERING DRAWINGS

COPYRIGHT NOTICE

Copyright © 2011 (Open Studio Designs cc). Copyright subsists in this drawing. The person or entity whose name appears in the title block of this drawing, is hereby granted a non-exclusive license to use, display, print and / or reproduce this drawing to the extent necessary to carry out and complete the project described in the title block of this drawing.

This license in respect of the copyright is expressly limited as aforesaid and the person and/or entity referred to above shall not be entitled to grant sub-licenses in respect of the copyright in this drawing to any other entity.

This license confers no ownership rights in the copyright vesting in the drawing and this drawing and the copyright subsisting therein will, at all times, remain the property of (Open Studio Design cc).

Any unauthorized reproduction, publication, transmission, adaptation and/or inclusion of this drawing in a cinematograph film or television broadcast is an act of copyright infringement which will render the doer of the act liable for civil law copyright infringement and may in certain circumstances render the doer liable to criminal prosecution.

Requests and enquiries concerning this drawing and the rights subsisting therein should be addressed to the copyright owner.

ACTS OF PARLIAMENT

All Contractors shall ensure that, before any work is put in hand, they comply with all the necessary Acts of Parliament of the Republic of South Africa.

ELECTRICAL NOTES:

- 3 PHASE CONNECTION TO BE PROVIDED IF POSSIBLE.
- TELEPHONE ENTRY POINT TO BE PROVIDED AT SUITABLE POINT TO BE DISCUSSED WITH G.P.O.
- ALL TELEPHONE CONDUITS TO BE SUPPLIED WITH DRAW-WIRE.
- PROVIDE COVER PLATES TO 100x75 TELEPHONE OUTLETS.
- SABS APPROVED EARTH LEAKAGE UNIT TO BE PROVIDED.
- 100x100 T.V. OUTLET BOXES AT 220mm ABOVE FINISHED FLOOR OR AS OTHERWISE INDICATED, LINKED WITH 25mm CONDUIT IN SERIES TO OUTLET BOX ALONGSIDE PLUG OUTLET IN GARAGE.
- EXTEND CONDUIT TO AERIAL/SATELITE DISH IN POSITION TO BE DISCUSSED WITH ARCHITECT.
- 21mm SEPARATE EARTH CONDUIT FROM THAT POINT DOWN TO FLOOR AND THROUGH SURFACE BED TO OUTSIDE.
- THE ELECTRICAL CONTRACTOR MUST CALCULATE THE TOTAL LOAD AND MAKE ALL NECESSARY PROVISIONS FOR THE INSTALLATION.
- THE REQUIRED AMPS PER PHASE AND CIRCUIT MUST BE CALCULATED AND PROVIDE FOR.
- APPROVED RATED BREAKERS TO BE PROVIDED FOR EACH CIRCUIT.
- ALL ELECTRICAL INSTALLATIONS MUST BE SABS APPROVED AND BE DONE BY A REGISTERED AND QUALIFIED ELECTRICIAN.
- PROPER TESTING TO BE DONE AFTER INSTALLATION AND WIRING CERTIFICATE NEEDS TO BE ISSUED IF ALL IS IN ORDER
- ALL INSTALLATIONS ARE TO BE AS ENERGY EFFICIENT AS POSSIBLE AND MUST COMPLY WITH SANS 10400XA AND SANS 204
- ALL LIGHTS TO BE LOW WATTAGE LED OR ENERGY SAVER LIGHT BULBS.
- PROPER EARTH TO BE INSTALLED AS PER NATIONAL REGULATIONS AND ALL STEEL, INCLUDING WATER PIPES ARE TO BE EARTHED.

SEE RATIONAL DESIGN

NOTE: SOLAR GEYSER SIZE TO BE DETERMINED BY WETWORKS ENGINEER. INSTALLATION TO BE DONE BY A SPECIALIST

GAS NOTE:

NATURAL GAS IN ACCORDANCE WITH SANS 10 078
INSTALLATION OF NATURAL GAS PIPES AND APPLIANCES TO COMPLY WITH SANS 827
GAS PIPE MANUFACTURE TO BE IN ACCORDANCE WITH SANS 4437
ALL GAS APPLIANCES TO COMPLY WITH SANS 1539
ALL SIZES AND SAFETY DISTANCES TO BE CHECKED ON SITE
INSTALLATION IS SUBJECT TO LOCAL AUTHORITY APPROVAL.
ALL MANDATORY FIRE EQUIPMENT TO BE PRESENT AND MAINTAINED
AREA AROUND MAIN SHUTOFF POINT TO BE KEPT CLEAR OF COMUSTIBLE MATERIALS
ALL SAFETY AND WARNING NOTICES TO BE DISPLAYED AS PER SANS 1186
ALL BUILDING WORKS TO COMPLY WITH SANS 10 400
ALL ELECTRICAL WORKS TO COMPLY WITH SANS 0108
NO REGISTRATION NEEDED BY LOCAL AUTHORITY
GAS PIPELINES TO BE INSTALLED AND PRESSURE TESTED BY REGISTERED GAS INSTALLER

ELECTRICAL LEGEND

- SURFACE MOUNTED CEILING LIGHT LOW WATTAGE
- RECESSED BULKHEAD LIGHT LOW WATTAGE
- RECESSED INCANDESCENT CEILING LIGHT LOW WATTAGE
- RECESSED LOW-WATTAGE LED DOWNLIGHTER (29 OF)
- RECESSED LOW-WATTAGE WALL WASHER (1 OF)
- WALL MOUNTED LIGHT POINT -LED LOW WATTAGE (4 OF)
- WATERPROOF WALL MOUNTED FLUORESCENT BULB (8 OF)
- SURFACE MOUNTED FLUORESCENT LIGHT
- RECESSED FLUORESCENT LIGHT
- LIGHTING TRACK LENGTH AS PER PLAN
- WATERPROOF SPIKE LIGHT ON ARMOUR CABLE
- LIGHT SWITCH
- WATERTIGHT LIGHT SWITCH
- DIMMER LIGHT SWITCH
- 2 WAY LIGHT SWITCH
- 15 AMP PLUG AT 220mm ABOVE F.F.L OR AS INDICATED
- DOUBLE 15 AMP PLUG AT 220mm ABOVE F.F.L OR AS INDICATED (32 OF)
- WATER PROOF DOUBLE 15 AMP PLUG AT 220mm OR AS INDICATED (2 OF)
- SHAVRER SOCKET / HAIR DRYER OUTLET
- TELEVISION POINT AT 220mm ABOVE F.F.L OR AS INDICATED
- GEYSER CONNECTION POINT CONNECTED TO SOLAR PANELS/ HEAT PUMP. GEYSER TO HAVE A SOLAR BLANKET.
- TELEPHONE POINT AT 220mm ABOVE F.F.L OR AS INDICATED
- INTERCOM POINT AT 220mm ABOVE F.F.L OR AS INDICATED
- STOVE / OVEN CONNECTION POINT
- STOVE / OVEN ISOLATOR SWITCH
- BELL PUSH
- BELL POINT
- UNDERFLOOR HEATING THERMOSTAT
- BATHROOM HEATER POINT
- CEILING MOUNTED FAN
- OUTLET FOR ELECTRICAL POINT AS SPECIFIED ON PLAN
- DISTRIBUTION BOARD- TO SANS 10142-1
- CHANDELIER LOW WATTAGE (10 OF)
- EXTRACTOR FAN CONNECTED TO LIGHT SWITCH. AIR MAY NOT BE RECIRCULATED IN BATHROOMS & DRESSER
- FLUORESCENT TUBELIGHT
- WI-FI POINT
- GAS SHUT OFF VALVE
- GARDEN LAMP ON POST (6 OF)

SPECIFICATIONS

- GENERAL
- 1.1 THIS DRAWING IS NOT TO BE SCALED, USE FIGURED DIMENSIONS ONLY. ALL DIMENSIONS AND HEIGHTS TO BE CHECKED AND VERIFIED BEFORE ANY WORK COMMENCES ON SITE. ANY DISCREPANCIES SHALL BE REPORTED TO THE ARCHITECT IMMEDIATELY. ALL LEVELS, HEIGHTS OF PLINTHS, DEPTH OF EXCAVATIONS AND NUMBER OF STEPS TO BE FINALLY CHECKED BY CONTRACTOR ON SITE.
- 1.2 THE SITE TO BE TREATED IN ACCORDANCE WITH S.A.B.S. CODE OF PRACTICE NO. 0124-1977 WITH SHELLDRITE TERMITTERPROOF SOIL POISONER
- 1.3 TOP OF FOUNDATIONS TO BE A MINIMUM OF 300mm BELOW NATURAL GROUND LEVEL.
- 1.4 BACKFILL TO FOUNDATIONS.
- 1.5 TOP OF 75mm CONCRETE SURFACE BED TO BE MINIMUM OF 150mm ABOVE FINISHED GROUND LEVEL
- 1.6 75mm THICK CONCRETE SURFACE BED TO BE ON 'GUNPLAS' USB GREEN DAMP PROOF MEMBRANE ON SAND BINDING ON WELL COMPACTED FILL
- 1.7 'GUNDLE' BRICKGRIP S.A.B.S. EMBOSSED D.P.C 375 MIC. UNDER ALL WALLS, WINDOW CILLS AND AT CHANGES IN FLOOR LEVELS.
- 1.8 STORMWATER SHALL BE REMOVED FROM DWELLING, YARD AND SITE.
- 1.9 ELECTRICAL INSTALLATION SHALL BE 'HEINEMANN' EARTH LEAKAGE SYSTEM IN DISTRIBUTION BOARD.
- 1.10 ALL BUILDING WORK TO BE CARRIED OUT IN ACCORDANCE WITH LOCAL AUTHORITIES BUILDING BY-LAWS AND REGULATIONS.

- FOUNDATIONS
- 2.1 ALL FOUNDATIONS, RETAINING WALLS, STRUCTURAL CONCRETE WORK AND SUB SOIL STORMWATER DRAINAGE TO CIVIL ENG'S SPECIFICATIONS.
- 2.2 ALL SOIL COMPACTION TO CIVIL ENG'S SPECIFICATIONS.
- 2.3 ALL FOUNDATIONS TO BE REINFORCED AS REQUIRED BY ENGINEER.

- FLOORS
- 3.1 MIN. 75mm CONCRETE SURFACE BED.
- 3.2 25mm CEMENT SCREED TO ALL FLOORS.
- 3.3 SKIRTING TO BE PROVIDED.


- WALLS
- 4.1 220mm BRICK WALLS WITH GUNDLE BRICKGRIP DPC.
- 4.2 BRICKFORCE EVERY 4 COURSES AND EVERY COURSE FOR 4 COURSES OVER OPENINGS
- 4.3 ALL BRICKWORK MIN. 7 mPa CLASS II.
- 4.4 WINDOWS BUILT IN WITH GUNDLE BRICKGRIP DPC.
- 4.5 ALL PAINTWORK TO COMPLY WITH MANUFACTURER'S SPECIFICATIONS WITH NECESSARY UNDERCOATS.
- 4.6 EXTERNAL TO PLAN INTERNAL-PLASTER AND PAINT.

ALL LEVELS, DIMENSIONS, DEPTHS OF EXCAVATIONS, HEIGHTS OF PLINTHS, NUMBER OF STEPS AND SIZES OF FOUNDATIONS TO BE PLACED AT A HEIGHT OF EXISTING STRUCTURE

- ROOF A
- 5.1 CONCRETE ROOF TILES @ 26° ON 38x38mm GRADED S.A. PINE TIMBER BATTENS @ 320mm C/C MAX ON 225x38mm PRE-FABRICATED, AS PER ENGINEER, S.A. PINE TRUSSES @ 760mm C/C MAX ON 114x38mm TIMBER WALL PLATES. TRUSSES TO BE ANCHORED WITH TWO STRANDS OF 25mm GALVANIZED STEEL WIRE FIXED 300mm DEEP IN BRICK WALL. PROVIDE SABS APPROVED PLASTIC UNDERLAY AND SEALATION INSULATION.
- 5.2 MIN. 170mm CONCRETE SLAB TO ENGINEER'S DETAIL AND DESIGN.
- 5.3 MIN. 55mm VEMICULITE INSULATING SCREED TO 1:60 FALL.
- 5.4 WATERPROOFING BY SPECIALIST TO MANUFACTURERS SPEC.
- 5.5 1500 P.V.C. RAINWATER DOWNPIPES FROM FULLBORE OUTLETS.
- 5.6 SKYLIGHTS TO MANUFACTURERS SPEC.
- 5.7 GUTTERS: MARLEY STREAMLINE SQUARE PROFILE RAINWATER GUTTERS + DOWNPIPES.
- 5.8 3mm SKM COAT RHINOLITE ON PLASTERBOARD CEILING FIXED TO 38x 38mm S.A. PINE BRANDING AT 450mm C/C FIXED TO TIE BEAMS.

- WINDOWS AND DOORS
- 6.1 ANY PANE OF GLASS WHICH IS TO BE INSTALLED WITHOUT SUPPORT FRAME SHALL BE IN ACCORDANCE WITH SABS 0137
- 6.2 THICKNESS OF PANES IN RELATION TO THEIR AREA SHALL BE IN ACCORDANCE WITH SABS 0137
- 6.3 EXTERNAL SLIDING DOORS: STANDARD AS PER WINDOWS TO SCHEDULE.
- 6.4 INTERNAL DOORS: STANDARD HARDWOOD FRAMES TO SCHEDULE
- 6.5 WINDOWS: TO SCHEDULE
- 6.6 SLIDING DOORS: DOORS TO SCHEDULE.

- DRAINAGE NOTES
- 7.1 1000 uPVC SEWER PIPE DRAIN WITH A MIN. FALL OF 1:60.
- 7.2 1000 OVP. AT HEAD OF DRAIN PIPE AS SHOWN.
- 7.3 RODDING EYES AT HEAD OF DRAIN, AT ALL CHANGES OF DIRECTION AND AT MAX. OF 2500m INTERVALS.
- 7.4 INSPECTION EYES AT ALL JUNCTIONS OF DRAIN, AND TO HAVE MARKED COVERS AT GROUND LEVEL.
- 7.5 DRAIN PIPE UNDER BUILDINGS TO BE PROTECTED AGAINST LOAD.
- 7.6 ALL WASTE PIPE TO HAVE 65mm RE-SEAL TRAPS, ALL WASTE PIPES TO BE ACCESSIBLE OVER ENTIRE LENGTH FOR CLEANING AND REPAIRS.
- 7.7 ALL WASTE PIPES UNDER FLOOR SLAB TO BE SLEEVED.
- 7.8 ALL SOIL FITTINGS WITH VERTICAL DISCHARGE GREATER THAN 1220 TO HAVE ANTISYPHON VENTPIEPES.
- 7.9 RAINWATER DOWNPIPES TO DISCHARGE A MIN. OF 2440 FROM ANY
- 7.10 ALL DRAINAGE WORK TO BE CARRIED OUT IN ACCORDANCE WITH LOCAL AUTHORITIES DRAINAGE BY-LAWS AND REGULATIONS.

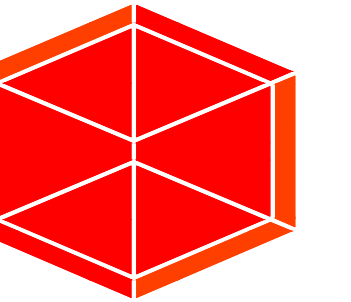

Open Studio Designs
Architectural & Interiors

Mobile 083-306-4315
Fax-086-543-8765
openstudio.design@gmail.com

STAND DESCRIPTION
NEW PROPOSED DWELLING ON
PTN 465 OF THE FARM
KROMDRAAI 560KQ
CLIENT:

WORKING DRAWINGS

TECHNOLOGISTS: W JUNG-KRUGER
ARCHITECT: W.R ELLIS

DATE: NOV 18 DWG NO:

DRAWN: WJK SHEET: 10 OF 10

GROUND STOREY PLAN
SCALE 1:100

