


SX1262 LoRa designed for 920-925MHz

Single-pin control mode — use one control pin (CTRL, pin 4) and tie pin 6 to VDD. CTRL = HIGH → RFC connected to RF1CTRL = LOW → RFC connected to RF2.

DIO2 can be configured to drive an RF switch through the use of the command SetDio2AsRfSwitchCtrl(...). In this mode, DIO2 will be at a logical 1 during Tx and at a logical 0 in any other mode.

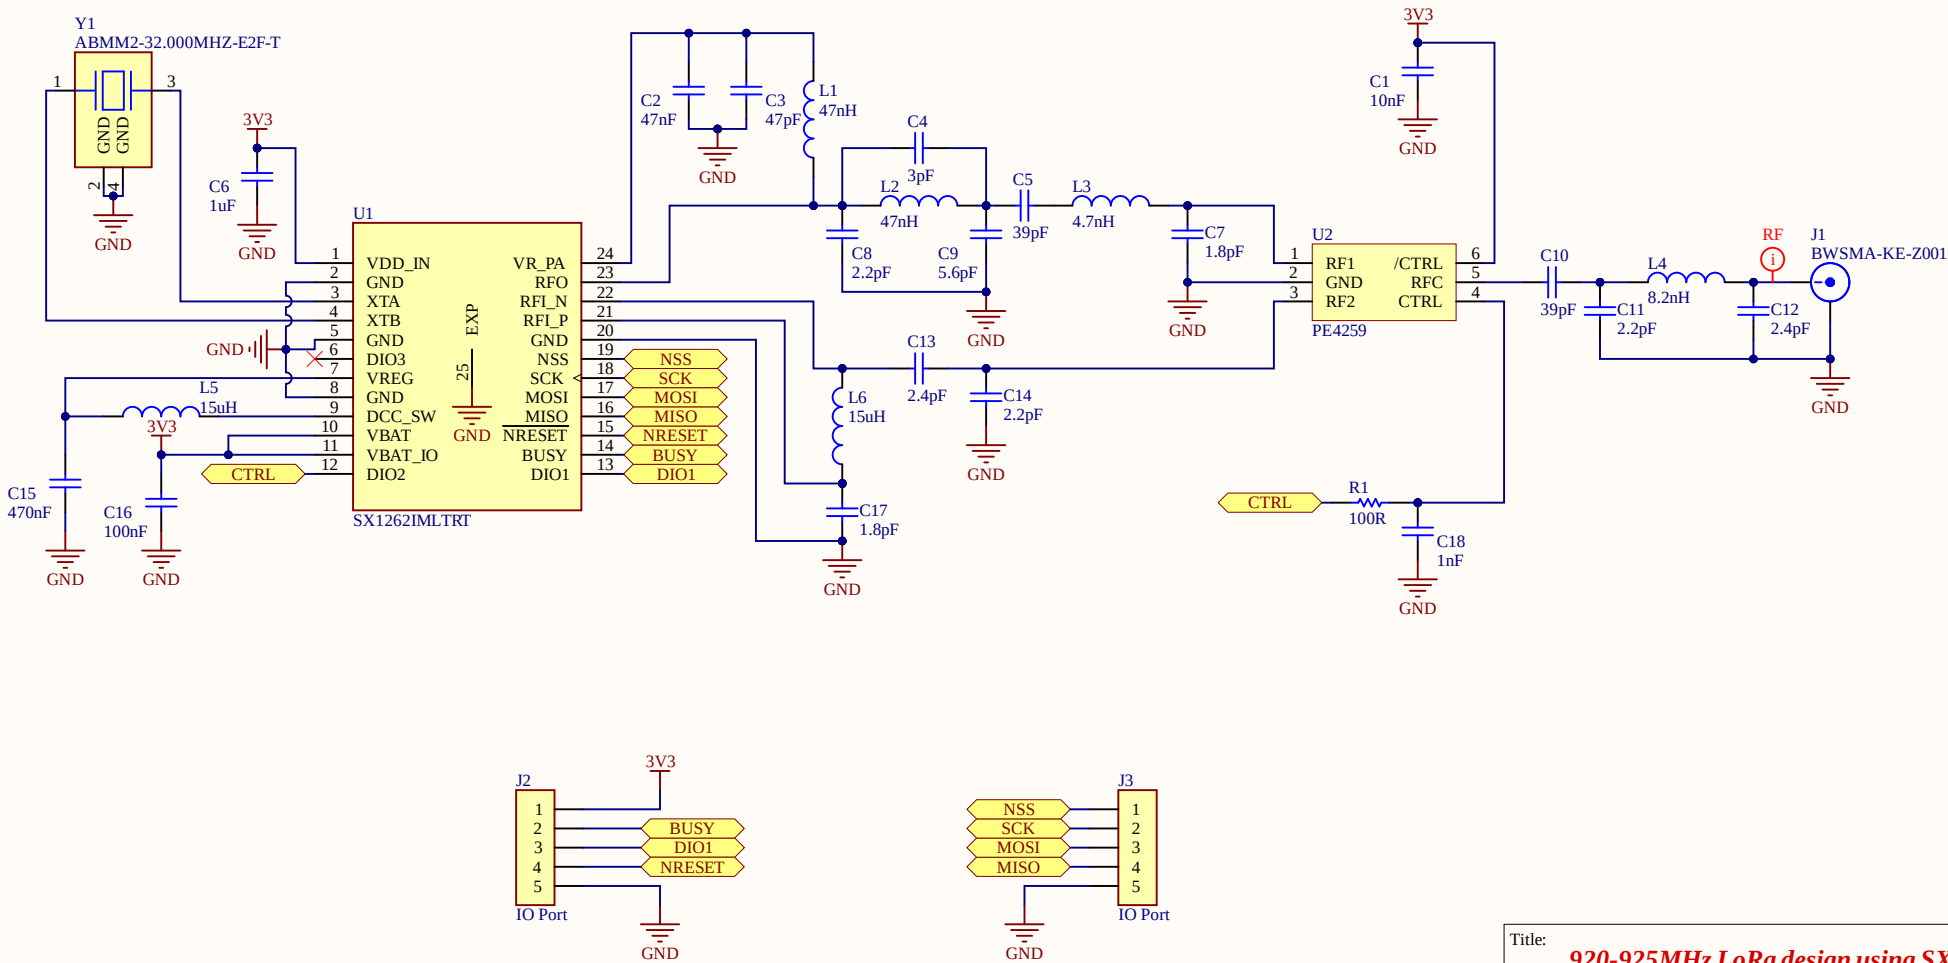

Title: 920-925MHz LoRa design using SX1262

Page Contents: LoRa\_SX1262.SchDoc

Drawn By: Engr. Usman Haider

Checked By: \*

Size: A3 Company: TraceForge Technologies

REV. A

Date: 8/30/2026

Time: 6:28:35 PM





Sheet 1 of 1


Email: traceforgetechnologies@gmail.com

File: C:\Users\usman\Documents\TraceForge Technologies




# LoRa 920-925MHz Long-Range RF Module

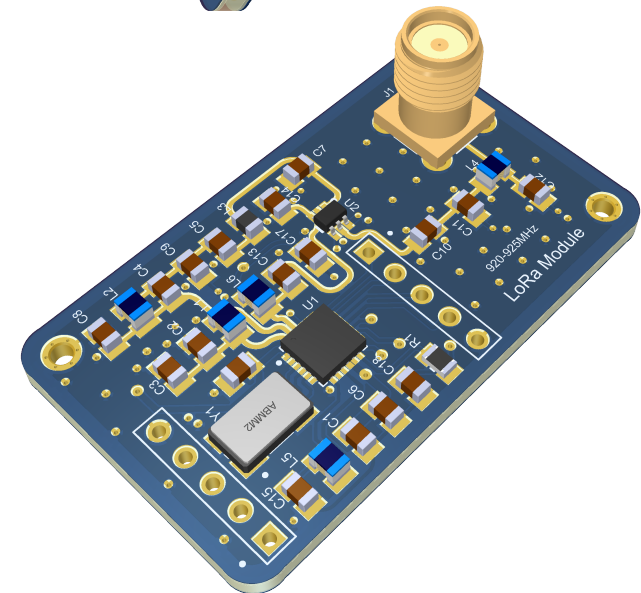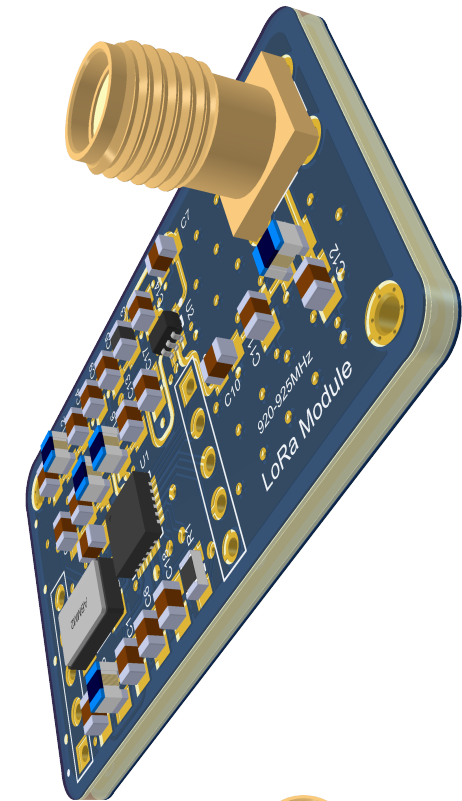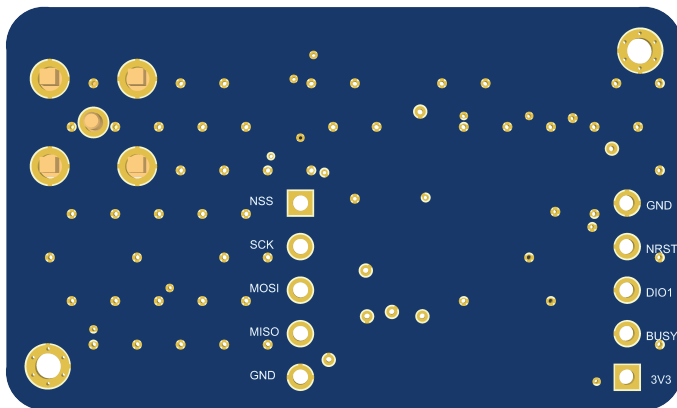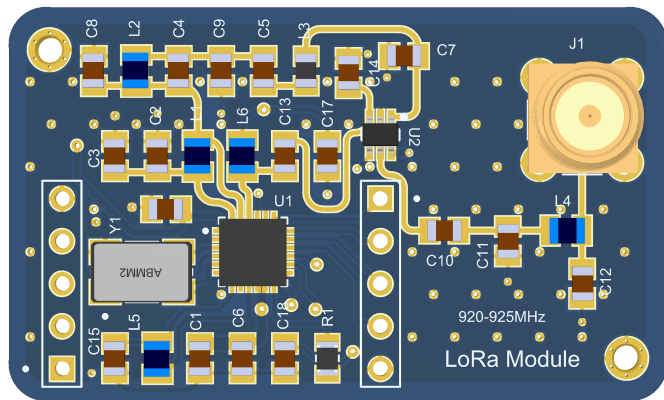

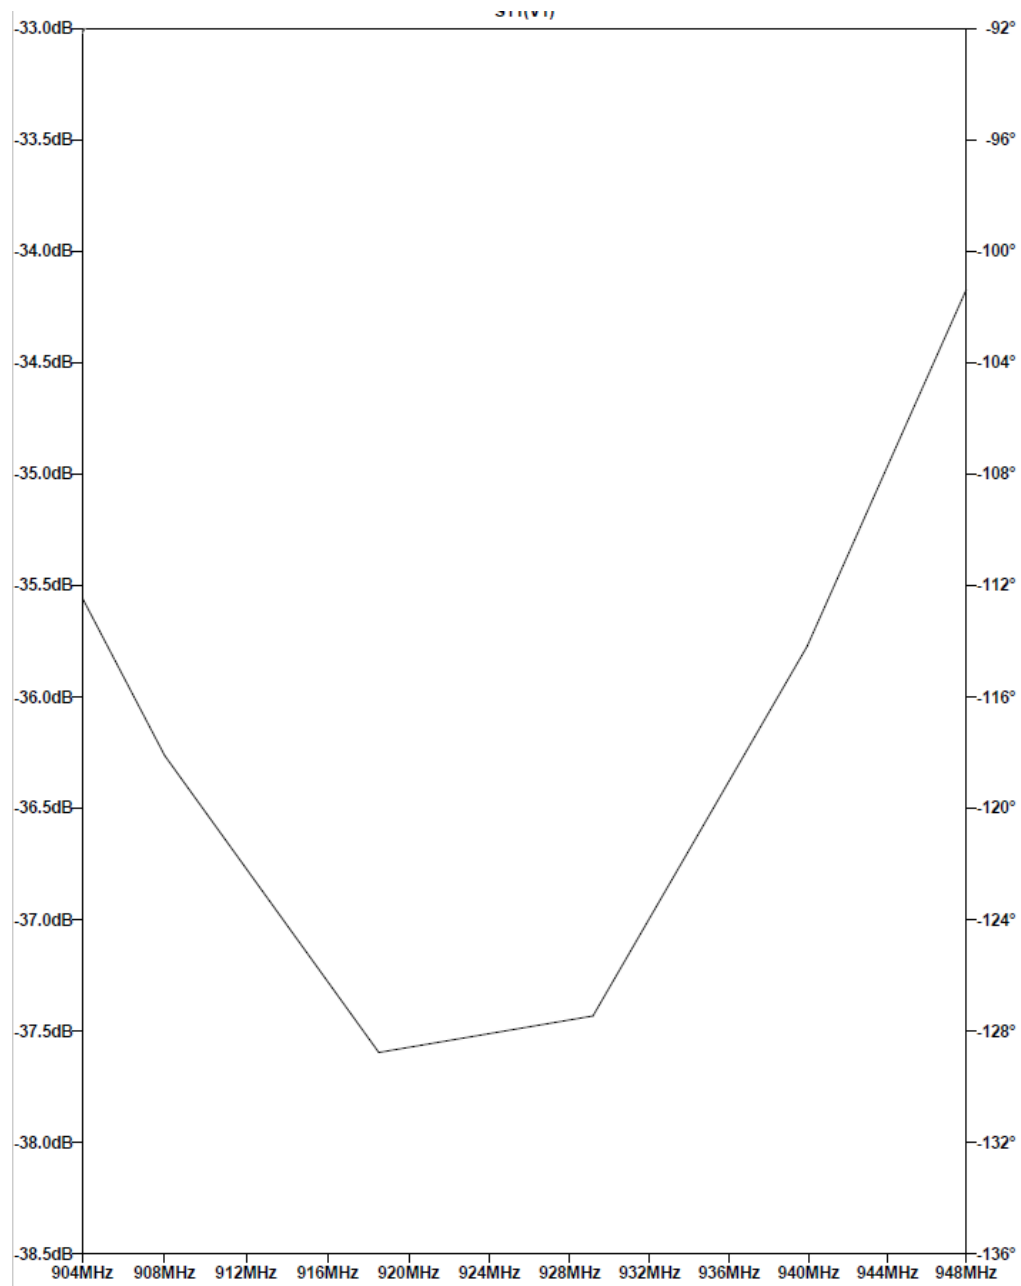


**Return Loss S11 (<-37dB) of RF Matching Network @ 920-925MHz**


Top Layer

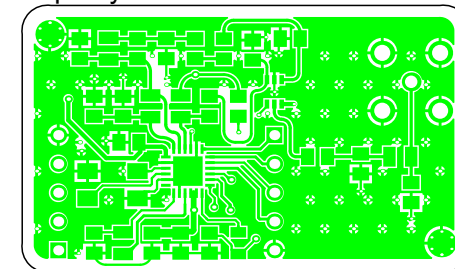

GND

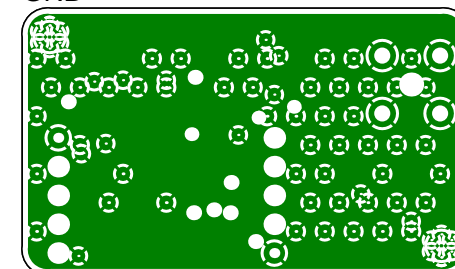

Power

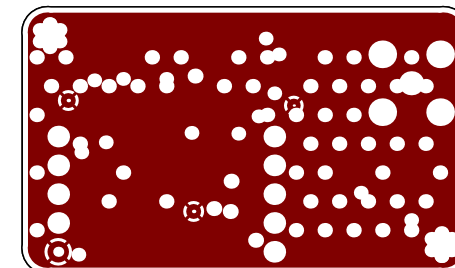

Bottom Layer

