


SX1262 LoRa designed for 920-925MHz

Single-pin control mode — use one control pin (CTRL, pin 4) and tie pin 6 to VDD. CTRL = HIGH → RFC connected to RF1. CTRL = LOW → RFC connected to RF2.

▲ DIO2 can be configured to drive an RF switch through the use of the command SetDio2AsRfSwitchCtrl(...). In this mode, DIO2 will be at a logical 1 during Tx and at a logical 0 in any other mode.

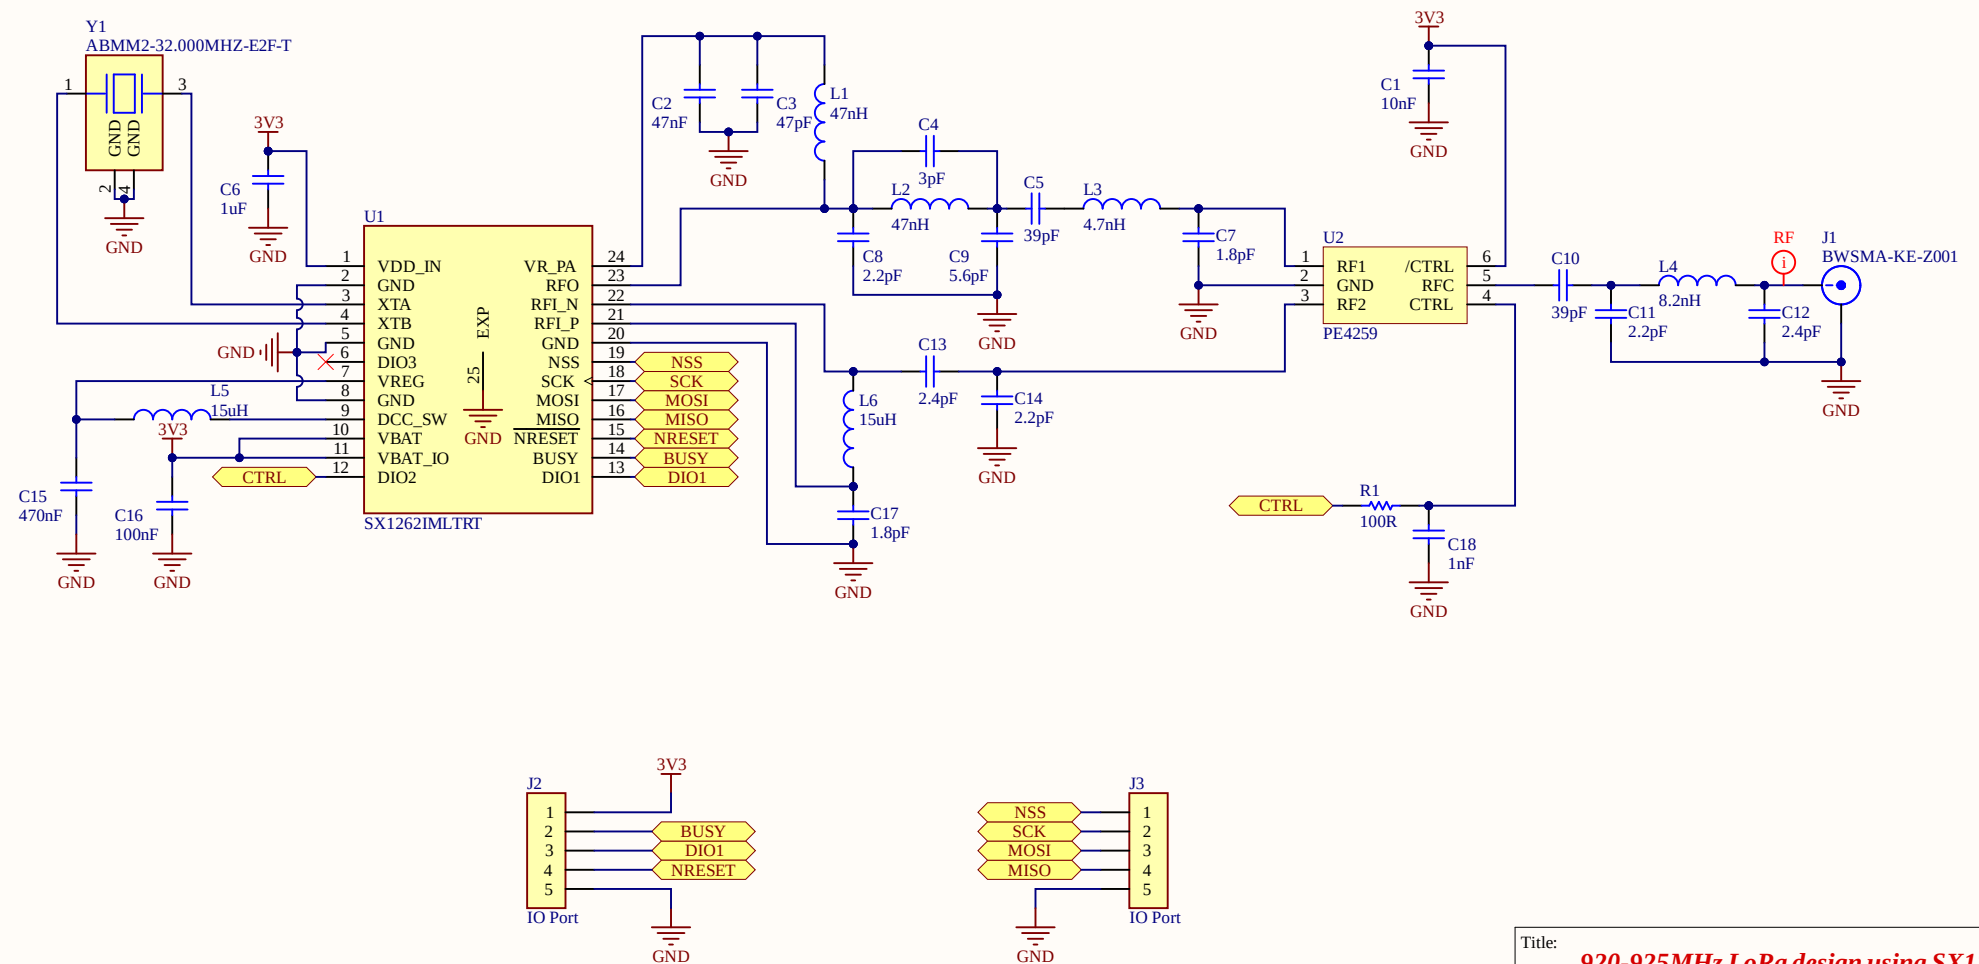

Title: **920-925MHz LoRa design using SX1262**

Page Contents: [LoRa_SX1262.SchDoc](#)

Drawn By: **Engr. Usman Haider**

Checked By: ✖

Size: A3	Company: <i>TraceForge Technologies</i>
----------	---




REV. A


Date: 8/30/2026	Time: 8:44:02 PM
Email: traceforgetechnologies@gmail.com	

File: C:\Users\usman\Documents\TraceForge Technologies




LoRa 920-925MHz Long-Range RF Module

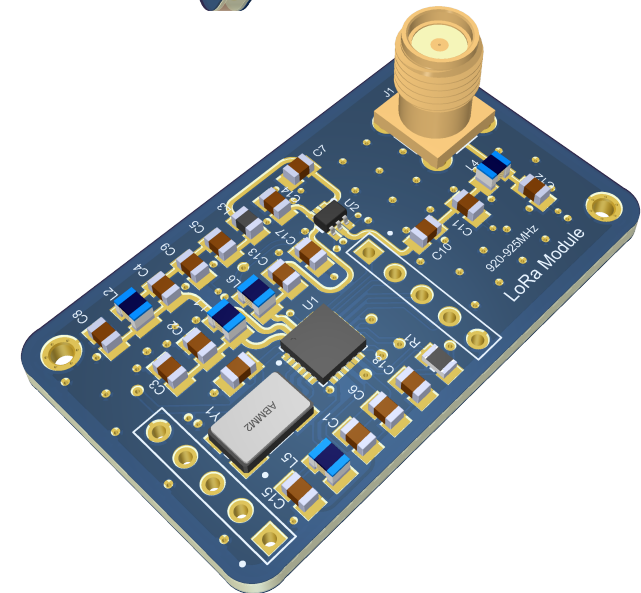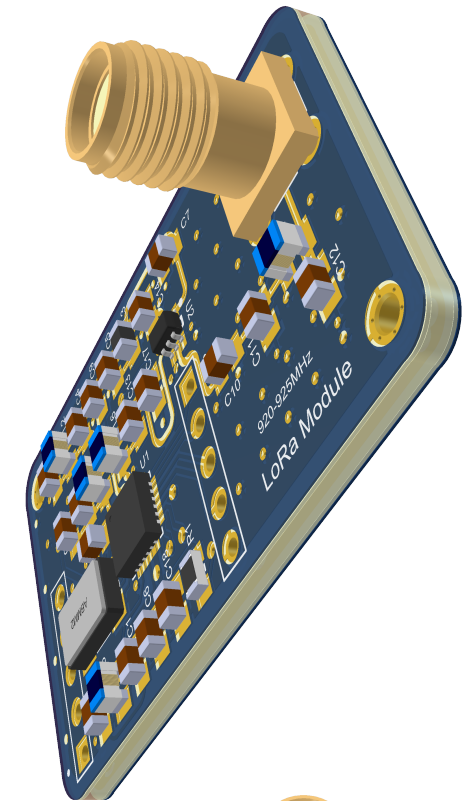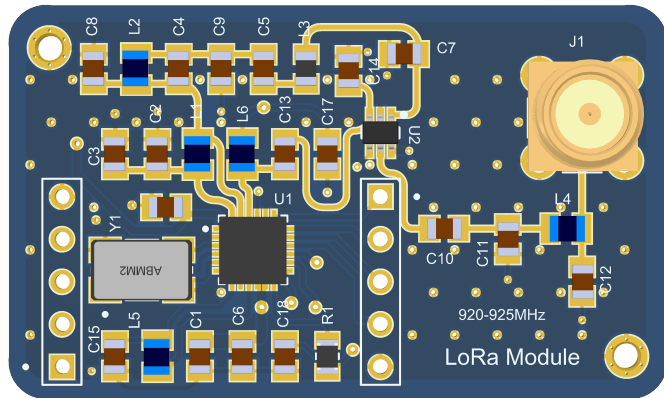

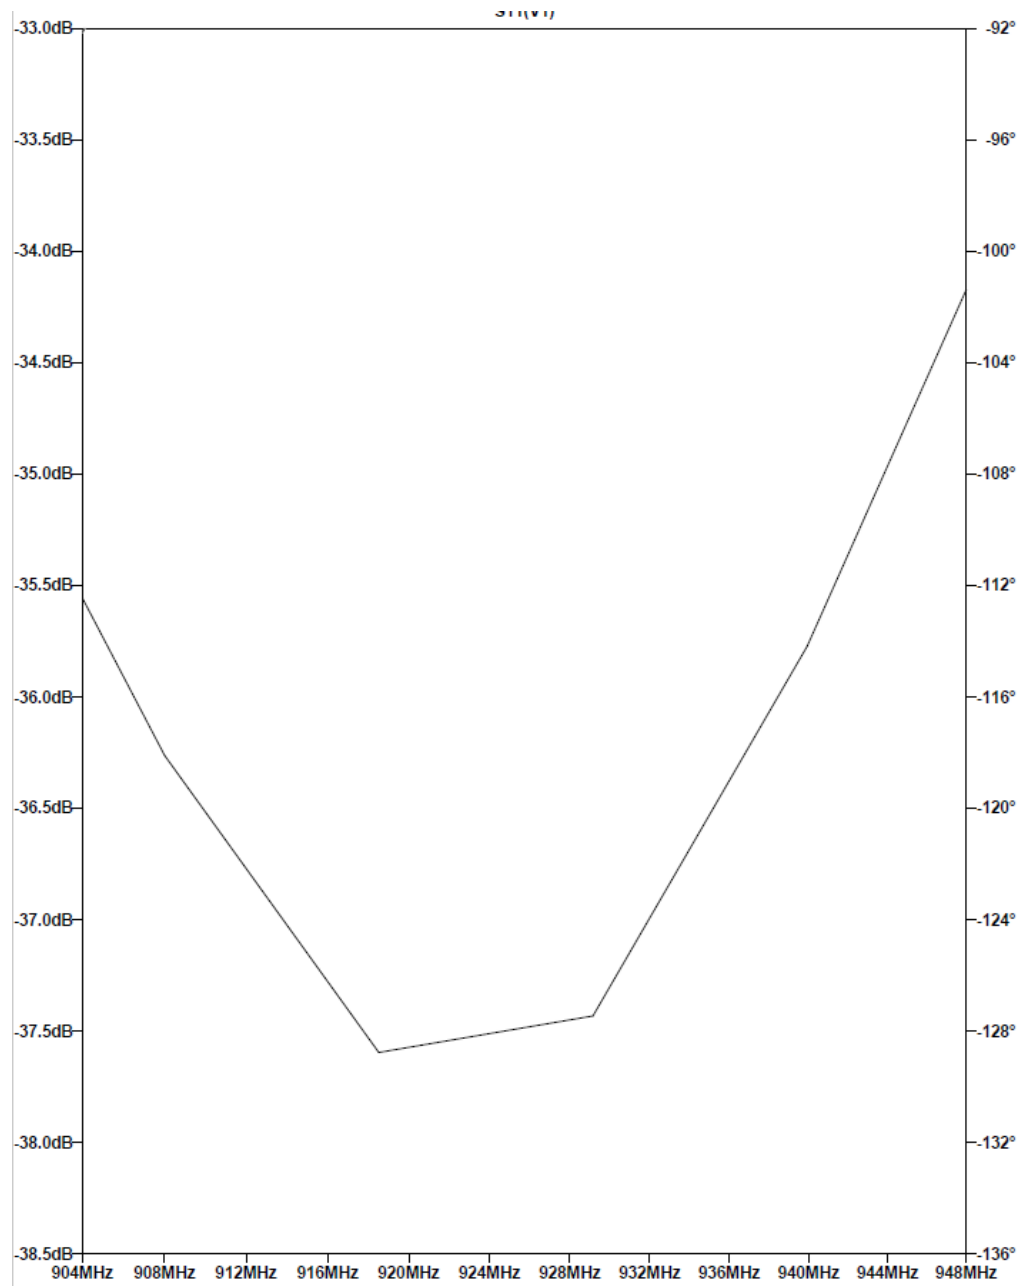


Return Loss S11 (<-37dB) of RF Matching Network @ 920-925MHz


Top Layer

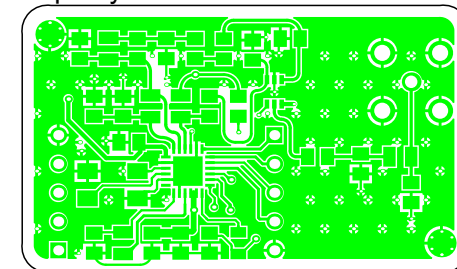

GND

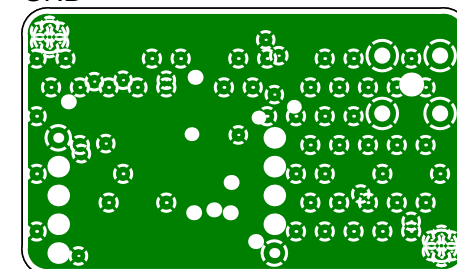

Power

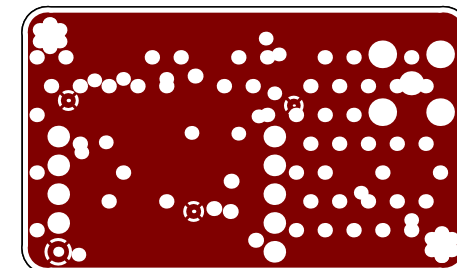

Bottom Layer

