IXYS

1200V XPT™ IGBT GenX3™ w/ Diode

IXYH30N120C3D1

V_{CES} = 1200V
I_{C110} = 30A
$V_{CE(sat)}$ ≤ 3.3V
$t_{fi(typ)}$ = 88ns

High-Speed IGBT
for 20-50 kHz Switching



TO-247 AD



G = Gate C = Collector
E = Emitter Tab = Collector

Symbol	Test Conditions	Maximum Ratings	
V_{CES}	T_J = 25°C to 150°C	1200	V
V_{CGR}	T_J = 25°C to 150°C, R_{GE} = 1MΩ	1200	V
V_{GES}	Continuous	±20	V
V_{GEM}	Transient	±30	V
I_{C25}	T_C = 25°C	66	A
I_{C110}	T_C = 110°C	30	A
I_{F110}	T_C = 110°C	20	A
I_{CM}	T_C = 25°C, 1ms	133	A
I_A	T_C = 25°C	20	A
E_{AS}	T_C = 25°C	400	mJ
SSOA (RBSOA)	V_{GE} = 15V, T_{VJ} = 150°C, R_G = 10Ω Clamped Inductive Load	I_{CM} = 60 @$V_{CE} \leq V_{CES}$	A
P_C	T_C = 25°C	416	W
T_J		-55 ... +150	°C
T_{JM}		150	°C
T_{stg}		-55 ... +150	°C
T_L	Maximum Lead Temperature for Soldering	300	°C
T_{SOLD}	1.6 mm (0.062in.) from Case for 10s	260	°C
M_d	Mounting Torque	1.13/10	Nm/lb.in
Weight		6	g

Symbol	Test Conditions (T_J = 25°C, Unless Otherwise Specified)	Characteristic Values Min.	Typ.	Max.	
BV_{CES}	I_C = 250μA, V_{GE} = 0V	1200			V
$V_{GE(th)}$	I_C = 250μA, V_{CE} = V_{GE}	3.0		5.0	V
I_{CES}	V_{CE} = V_{CES}, V_{GE} = 0V			25	μA
	T_J = 125°C			350	μA
I_{GES}	V_{CE} = 0V, V_{GE} = ±20V			±100	nA
$V_{CE(sat)}$	I_C = 30A, V_{GE} = 15V, Note 1			3.3	V
	T_J = 150°C		3.7		V

Features

- Optimized for Low Switching Losses
- Square RBSOA
- Positive Thermal Coefficient of Vce(sat)
- Anti-Parallel Ultra Fast Diode
- Avalanche Rated
- High Current Handling Capability
- International Standard Package

Advantages

- High Power Density
- Low Gate Drive Requirement

Applications

- High Frequency Power Inverters
- UPS
- Motor Drives
- SMPS
- PFC Circuits
- Battery Chargers
- Welding Machines
- Lamp Ballasts

Symbol	Test Conditions (T_J = 25°C Unless Otherwise Specified)	Characteristic Values Min.	Typ.	Max.	
g_{fs}	I_C = 30A, V_{CE} = 10V, Note 1	10	17		S
C_{ies}	V_{CE} = 25V, V_{GE} = 0V, f = 1MHz		1640		pF
C_{oes}			140		pF
C_{res}			38		pF
$Q_{g(on)}$	I_C = 30A, V_{GE} = 15V, V_{CE} = 0.5 • V_{CES}		69		nC
Q_{ge}			9		nC
Q_{gc}			34		nC
$t_{d(on)}$	**Inductive load, T_J = 25°C**		19		ns
t_{ri}	I_C = 30A, V_{GE} = 15V		40		ns
E_{on}	V_{CE} = 0.5 • V_{CES}, R_G = 10Ω		2.6		mJ
$t_{d(off)}$	Note 2		130		ns
t_{fi}			88		ns
E_{off}			1.1		mJ
$t_{d(on)}$	**Inductive load, T_J = 150°C**		19		ns
t_{ri}	I_C = 30A, V_{GE} = 15V		52		ns
E_{on}	V_{CE} = 0.5 • V_{CES}, R_G = 10Ω		6.0		mJ
$t_{d(off)}$	Note 2		156		ns
t_{fi}			140		ns
E_{off}			1.6		mJ
R_{thJC}				0.30	°C/W
R_{thCS}			0.21		°C/W

TO-247 (IXYH) Outline

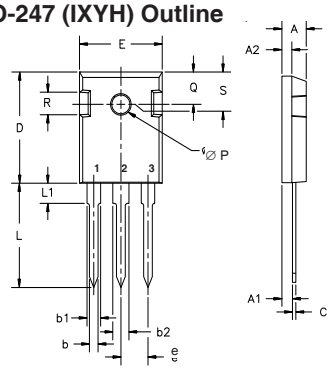

Terminals: 1 - Gate 2 - Collector
3 - Emitter

Dim.	Millimeter Min.	Max.	Inches Min.	Max.
A	4.7	5.3	.185	.209
A_1	2.2	2.54	.087	.102
A_2	2.2	2.6	.059	.098
b	1.0	1.4	.040	.055
b_1	1.65	2.13	.065	.084
b_2	2.87	3.12	.113	.123
C	.4	.8	.016	.031
D	20.80	21.46	.819	.845
E	15.75	16.26	.610	.640
e	5.20	5.72	0.205	0.225
L	19.81	20.32	.780	.800
L1		4.50		.177
∅P	3.55	3.65	.140	.144
Q	5.89	6.40	0.232	0.252
R	4.32	5.49	.170	.216
S	6.15 BSC		242 BSC	

Reverse Diode (FRED)

Symbol	Test Conditions (T_J = 25°C, Unless Otherwise Specified)	Characteristic Value Min.	Typ.	Max.	
V_F	I_F = 30A,V_{GE} = 0V, Note 1			3.00	V
		T_J = 150°C	1.75		V
I_{RM}	I_F = 30A,V_{GE} = 0V, -di_F/dt = 100A/µs,	T_J = 100°C		9	A
t_{rr}	V_R = 600V	T_J = 100°C	195		ns
R_{thJC}				0.90	°C/W

Notes:

1. Pulse test, t ≤ 300µs, duty cycle, d ≤ 2%.
2. Switching times & energy losses may increase for higher V_{CE}(clamp), T_J or R_G.

Fig. 1. Output Characteristics @ T_J = 25ºC

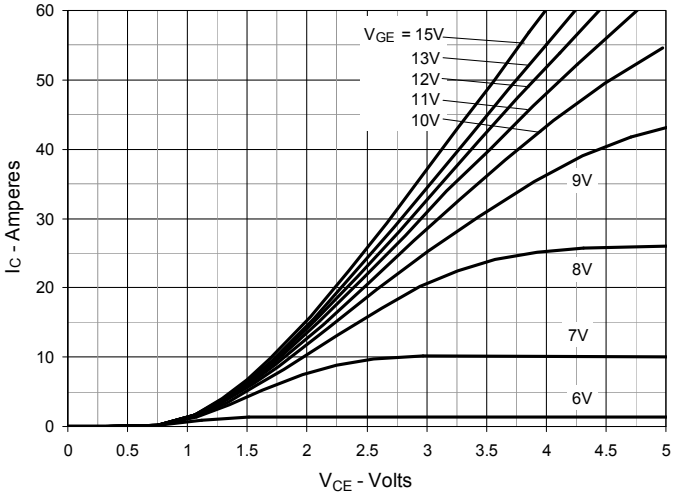

Fig. 2. Extended Output Characteristics @ T_J = 25ºC

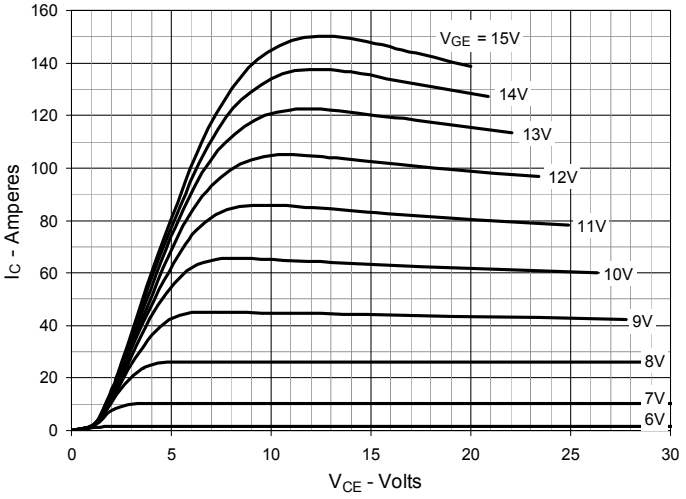

Fig. 3. Output Characteristics @ T_J = 150ºC

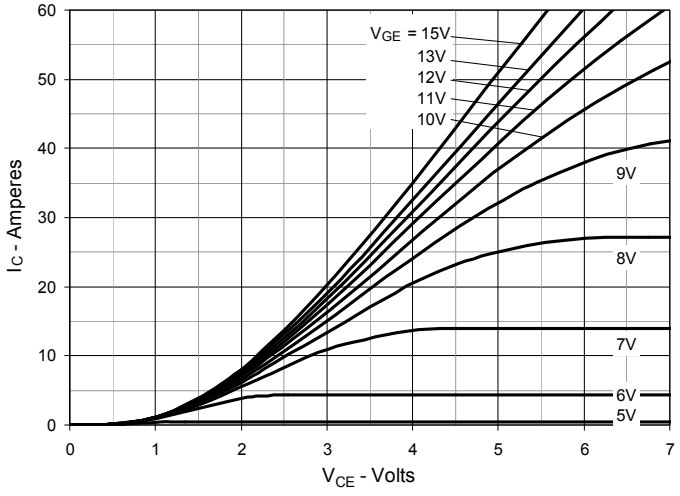

Fig. 4. Dependence of $V_{CE(sat)}$ on Junction Temperature

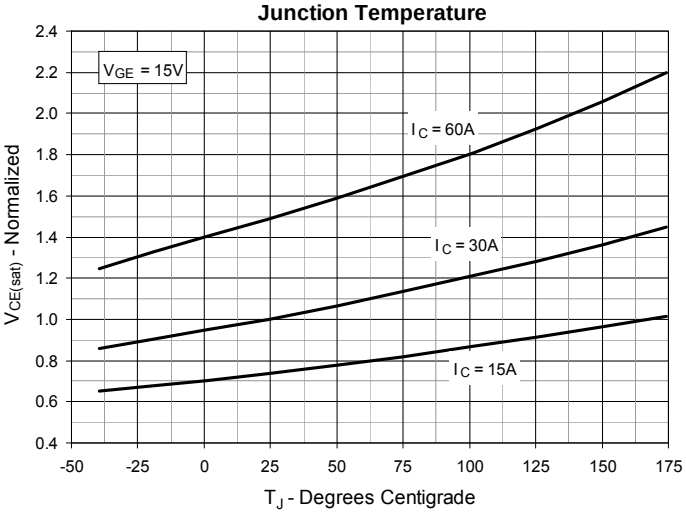

Fig. 5. Collector-to-Emitter Voltage vs. Gate-to-Emitter Voltage

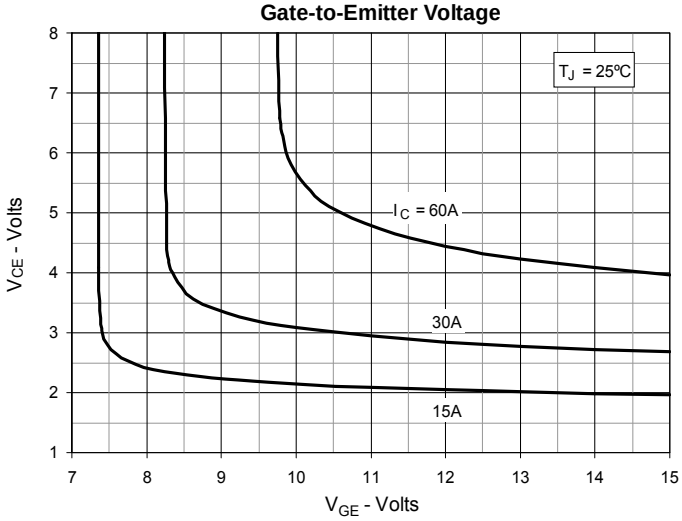

Fig. 6. Input Admittance

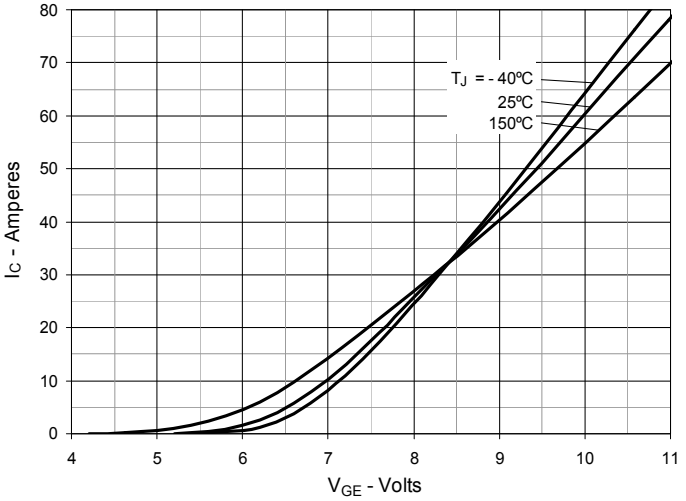

Fig. 7. Transconductance

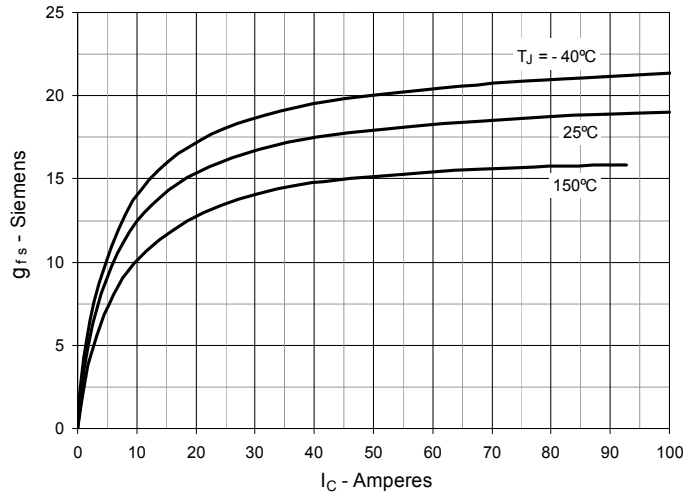

Fig. 8. Gate Charge

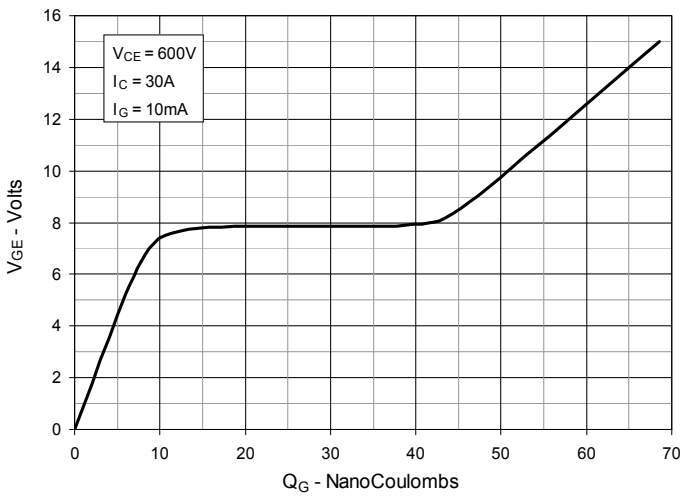

Fig. 9. Capacitance

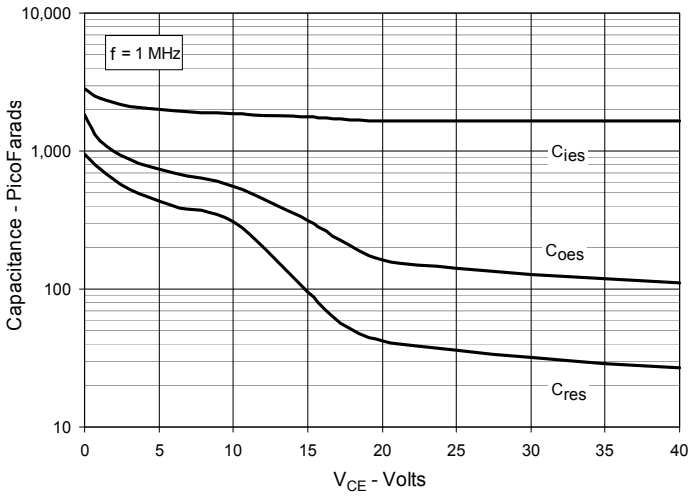

Fig. 10. Reverse-Bias Safe Operating Area

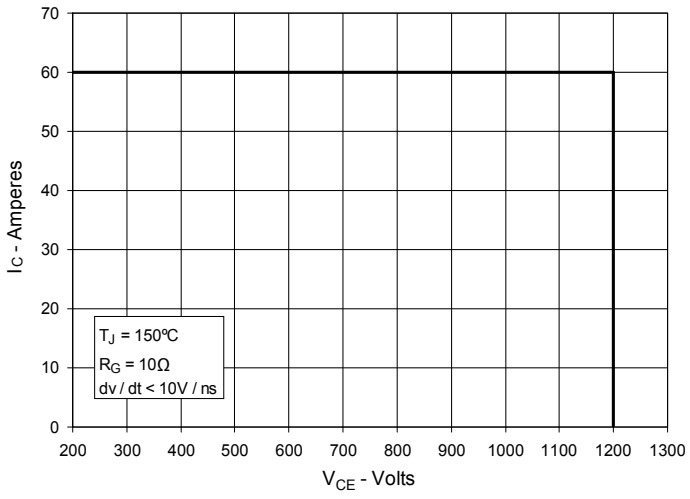

Fig. 11. Maximum Transient Thermal Impedance (IGBT)

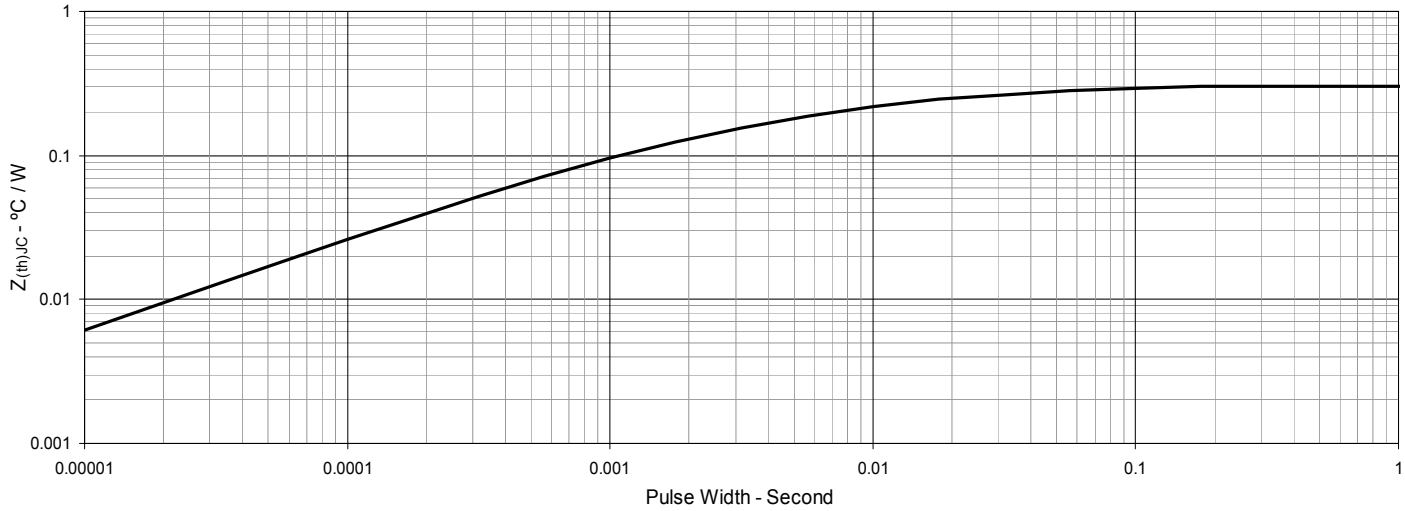

Fig. 12. Inductive Switching Energy Loss vs. Gate Resistance

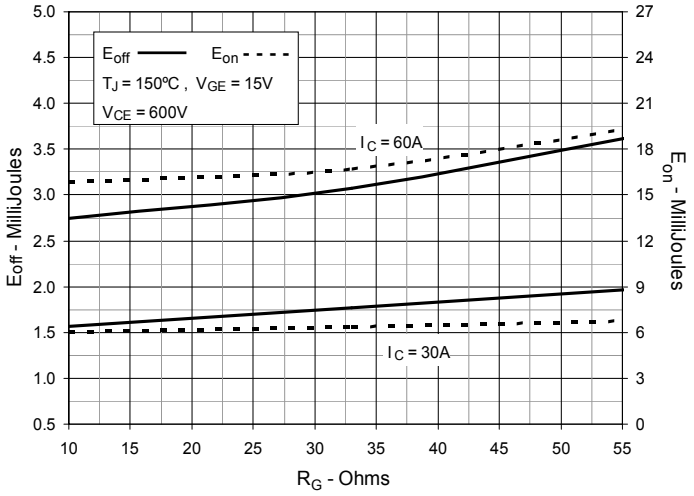

Fig. 13. Inductive Switching Energy Loss vs. Collector Current

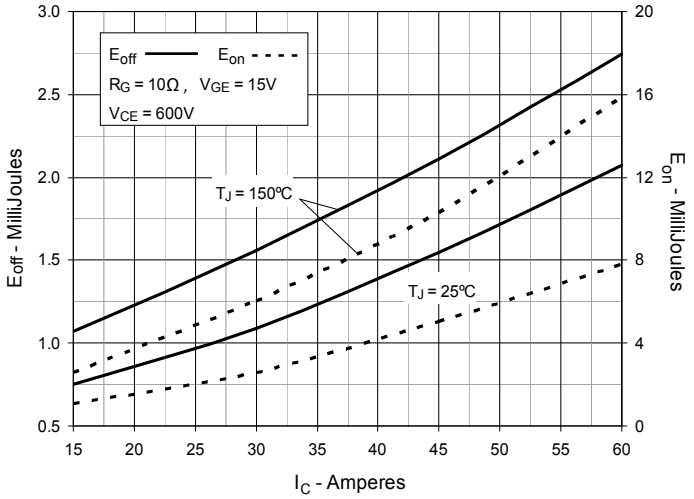

Fig. 14. Inductive Switching Energy Loss vs. Junction Temperature

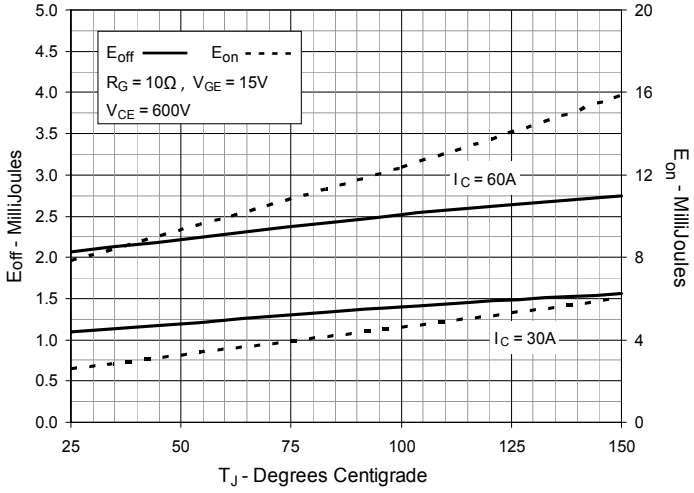

Fig. 15. Inductive Turn-off Switching Times vs. Gate Resistance

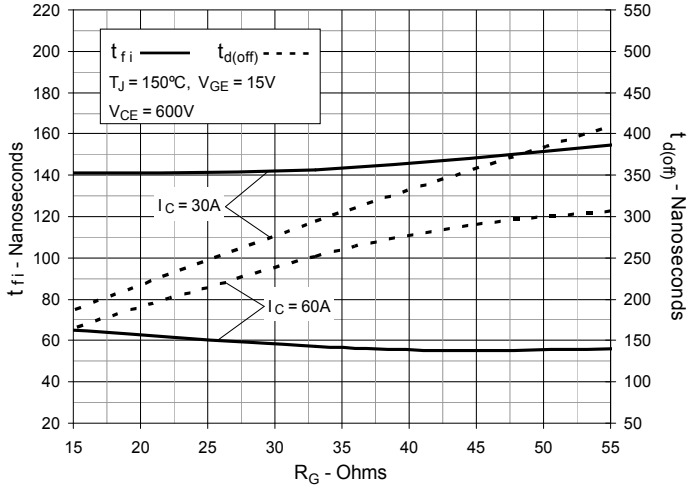

Fig. 16. Inductive Turn-off Switching Times vs. Collector Current

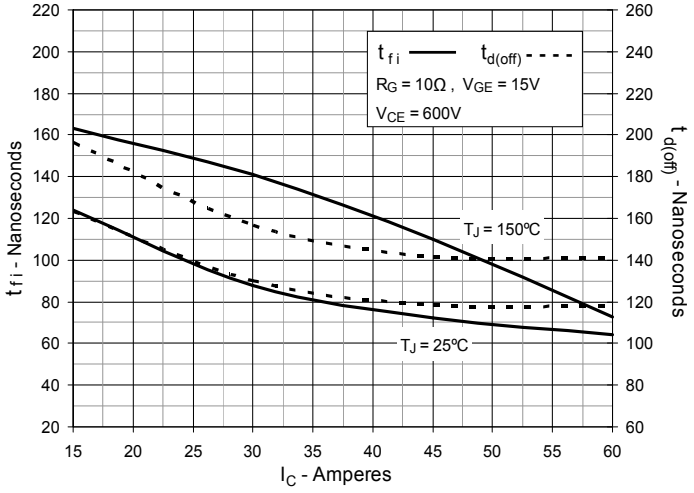

Fig. 17. Inductive Turn-off Switching Times vs. Junction Temperature

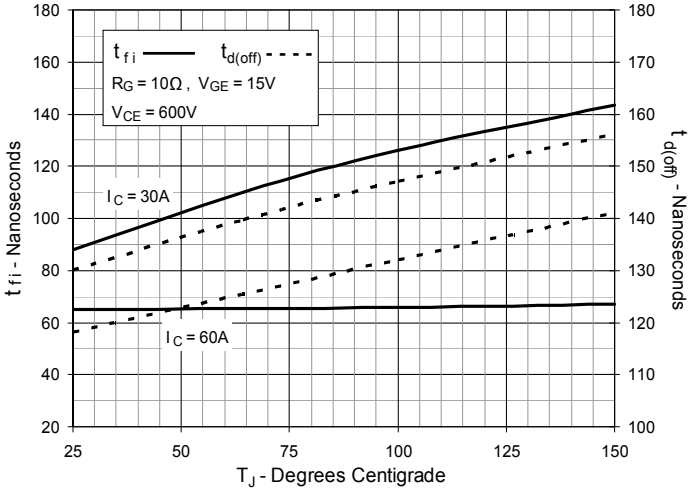

Fig. 18. Inductive Turn-on Switching Times vs. Gate Resistance

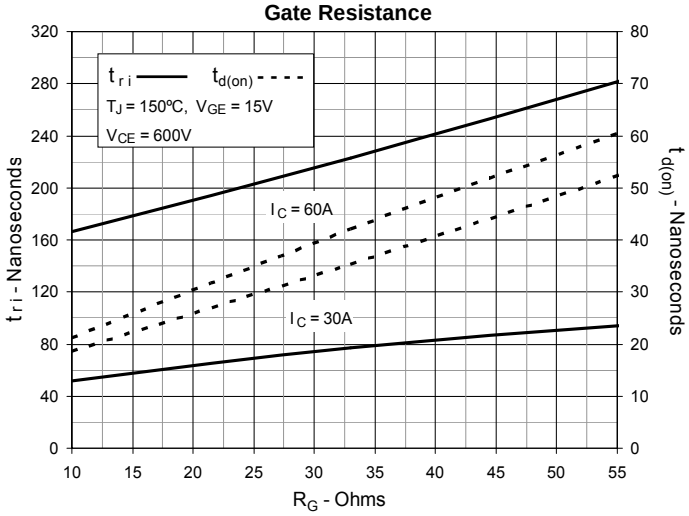

Fig. 19. Inductive Turn-on Switching Times vs. Collector Current

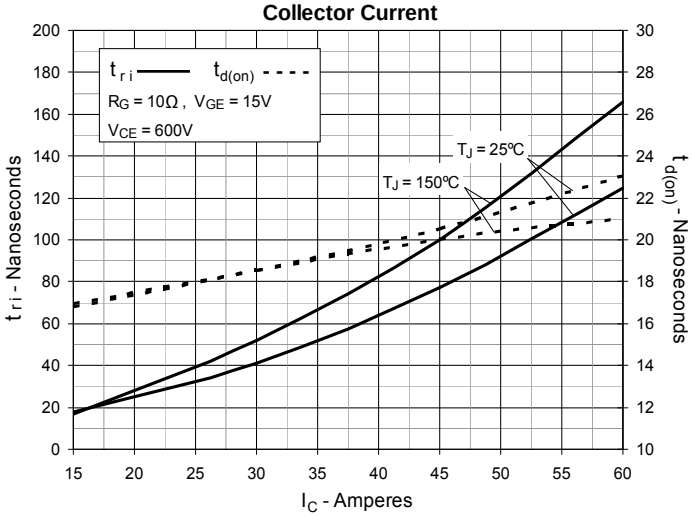

Fig. 20. Inductive Turn-on Switching Times vs. Junction Temperature

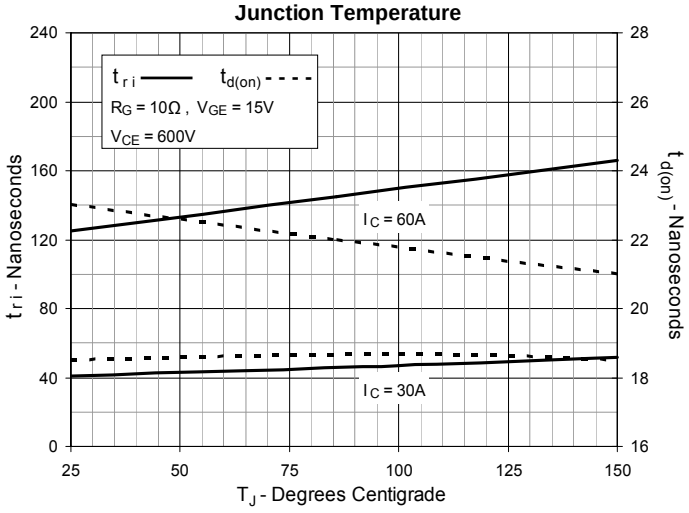

Fig. 21. Maximum Peak Load Current vs. Frequency

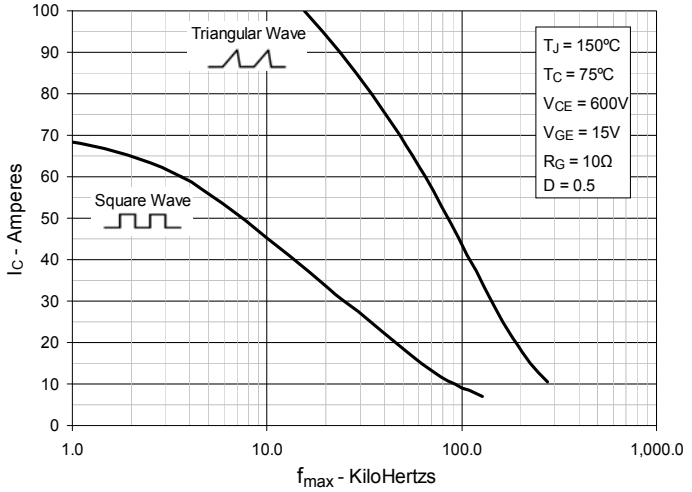

Fig. 22. Maximum Transient Thermal Impedance (Diode)

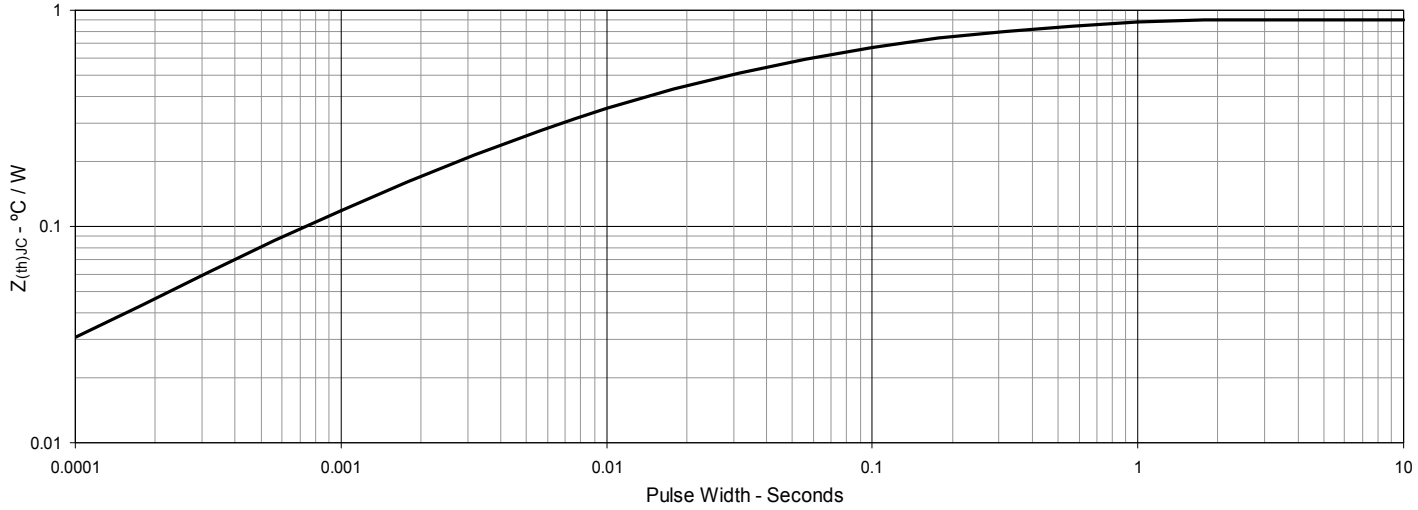

Fig. 23. Forward Current I_F vs V_F

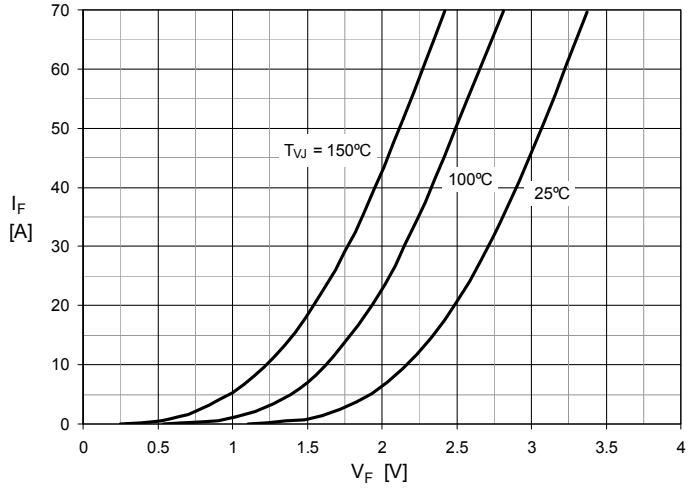

Fig. 24. Reverse Recovery Charge Q_{RM} vs. -di_F/dt

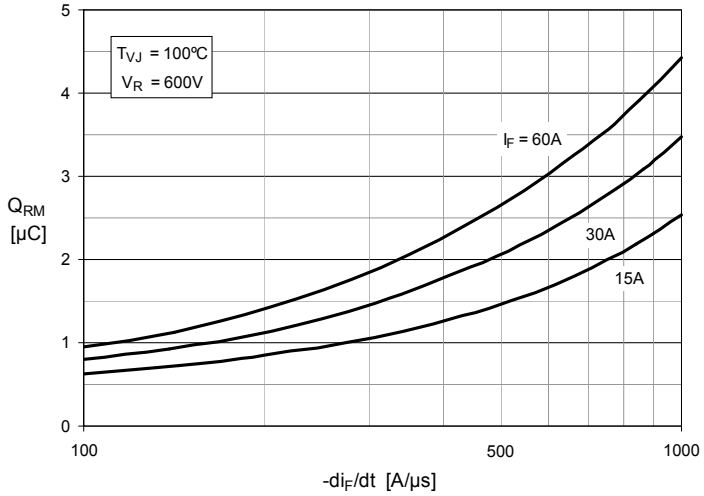

Fig. 25. Peak Reverse Current I_{RM} vs. -di_F/dt

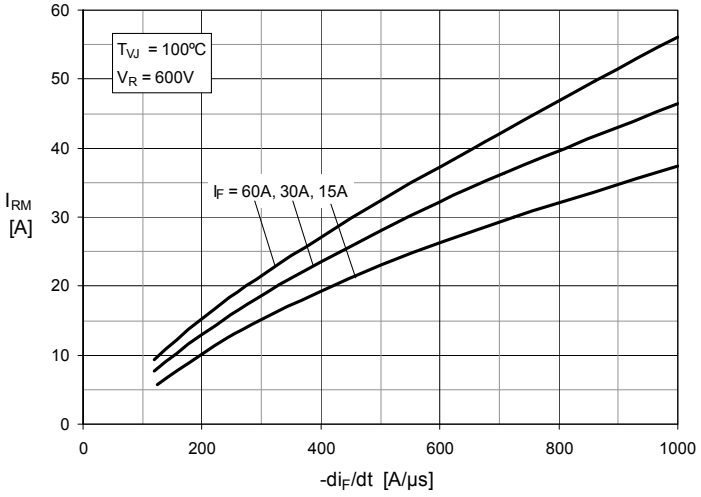

Fig. 26. Dynamic Parameters Q_{RM}, I_{RM} vs. T_{VJ}

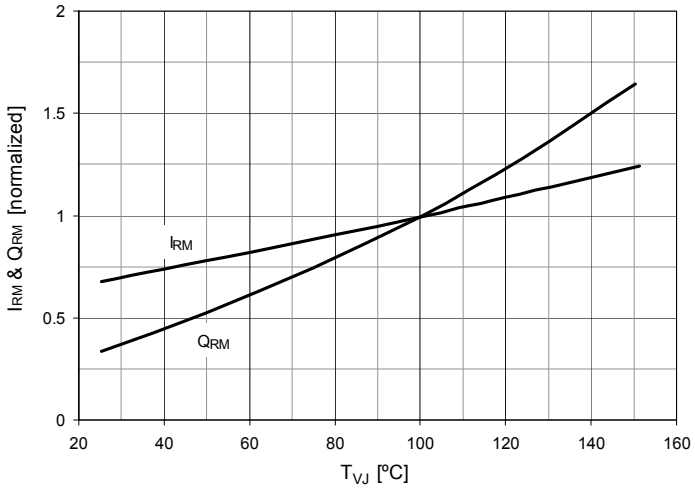

Fig. 27. Recovery Time t_{rr} vs. -di_F/dt

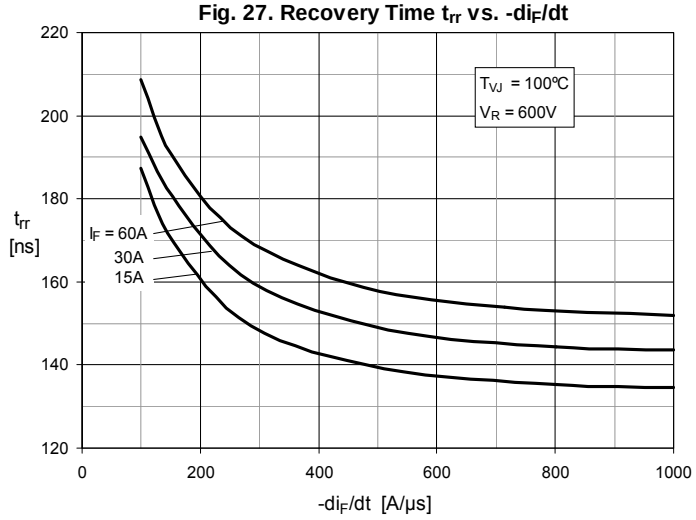

Fig. 28. Peak Forward Voltage V_{FR}, t_{rr} vs -di_F/dt