

LTM4609EV: 36V_{IN}, 34V_{OUT} Buck-Boost DC/DC μModule® Regulator

DESCRIPTION

Demonstration circuit DC1477B features the LTM®4609EV, the high voltage, high efficiency, high density switch mode buck-boost power module. The LTM4609EV regulates an output voltage above, below, or equal to the input voltage. DC1477B accepts an input voltage from 10V to 36V with a preset output voltage of 30V at up to 3A. Derating may be necessary for certain V_{IN}, V_{OUT}, and thermal conditions. An optional input π filter is added on the DC1477B to minimize the input ripple. The switching frequency may be synchronized to an external clock from

200kHz to 400kHz to reduce undesirable frequency harmonics and/or parallel multiple modules for even higher output current. The LTM4609 data sheet must be read in conjunction with this demo manual prior to working on or modifying demo circuit DC1477B.


Design files for this circuit board are available at <http://www.linear.com/demo>

LT, LTC, LTM, μModule, Linear Technology and the Linear logo are registered trademarks of Linear Technology Corporation. All other trademarks are the property of their respective owners.

PERFORMANCE SUMMARY (T_A = 25°C)

PARAMETER	CONDITIONS	VALUE
Minimum Input Voltage		10V to 36V
Output Voltage V _{OUT}		30V ± 2%
Maximum Continuous Output Current	Derating is Necessary for Certain V _{IN} , V _{OUT} , and Thermal Conditions	3ADC at 10V _{IN} 8ADC at 24V _{IN} 10ADC at V _{IN} > 30V
Default Operating Frequency		300KHz
Efficiency	V _{IN} = 20V, V _{OUT} = 30V, I _{OUT} = 3A	96.7%, See Figure 3 for More Information

BOARD PHOTO

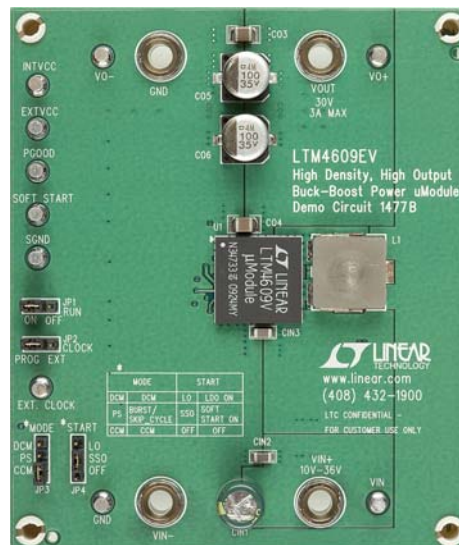

dc1477bf

QUICK START PROCEDURE

Demonstration circuit DC1477B is an easy way to evaluate the performance of the LTM4609EV. Please refer to Figure 1 for proper measurement equipment setup and follow the procedure below:

1. Place jumpers in the following positions for a typical $30V_{OUT}$ application:

RUN	CLOCK	MODE	START
ON	PROG	CCM	SSO

2. With the power supply off, connect the input power supply, load and meters as shown in Figure 1. Preset the load to 0A and V_{IN} supply between 10V to 36V.
3. Turn on the power at the input. The output voltage should be $30V \pm 2\%$.
4. Once the proper output voltage is established, adjust the load within the operating range and observe the output voltage regulation, ripple voltage, efficiency and other parameters. A cooling fan and heat sink are necessary for $V_{IN} < 10V$ and $I_{OUT} = 3A$.

5. To measure input and output ripple, please refer to Figure 2 for proper setup.
6. To adjust the switching frequency turn off the power supply and modify R6 and R7. Do not allow voltage at pin PLLFLTR to exceed 2.4V.
7. Inductor and R_{SENSE} should be modified to accommodate certain input and output condition. Refer to the data sheet for details.
8. The input filter formed by CIN2, L2 and L3, CIN3 and CIN4 is for the purpose of reducing the input voltage ripple. The magnetic beads L2 and L3 are not necessary, but they help to reduce the high frequency ringings on the input supply significantly. See Figure 5 for details.
9. The optional components Rsnb1 and Csnb1, Rsnb2 and Csnb2 can be used to form RC snubber circuits on the switching nodes, which may help to reduce the output ripple. Refer to the data sheet for details.

QUICK START PROCEDURE

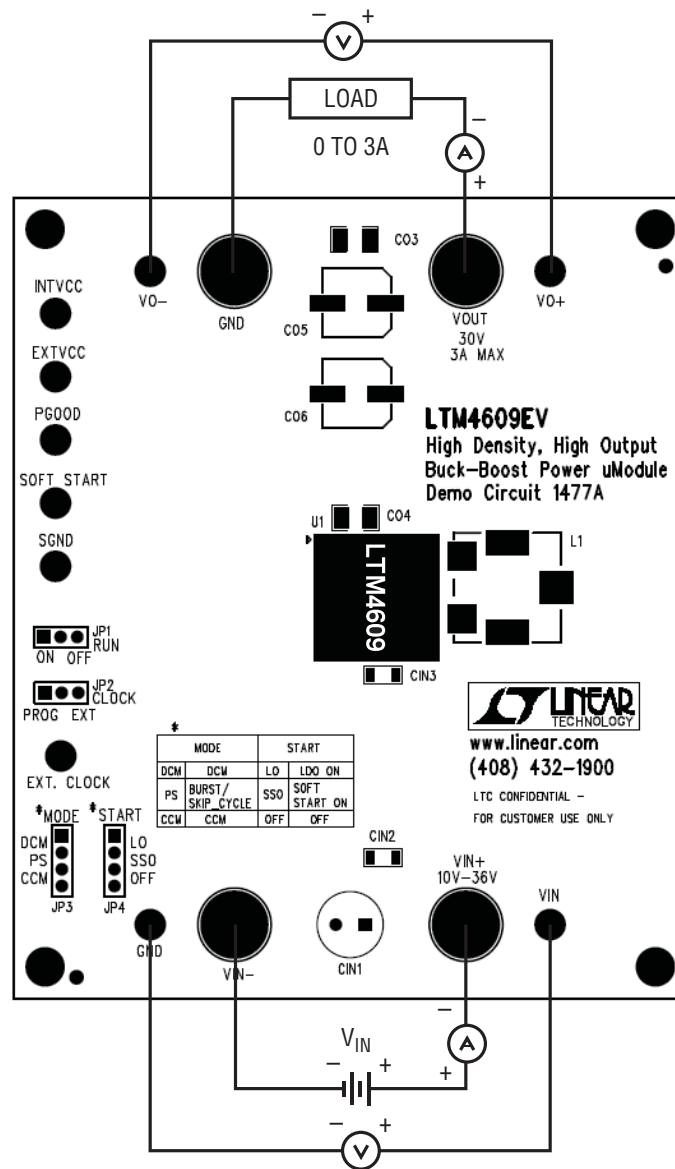


Figure 1. Test Setup of DC1477B

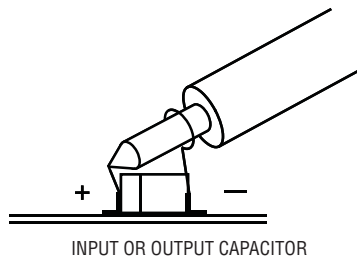


Figure 2. Proper Scope Probe Placement for Measuring Input or Output Ripple

QUICK START PROCEDURE


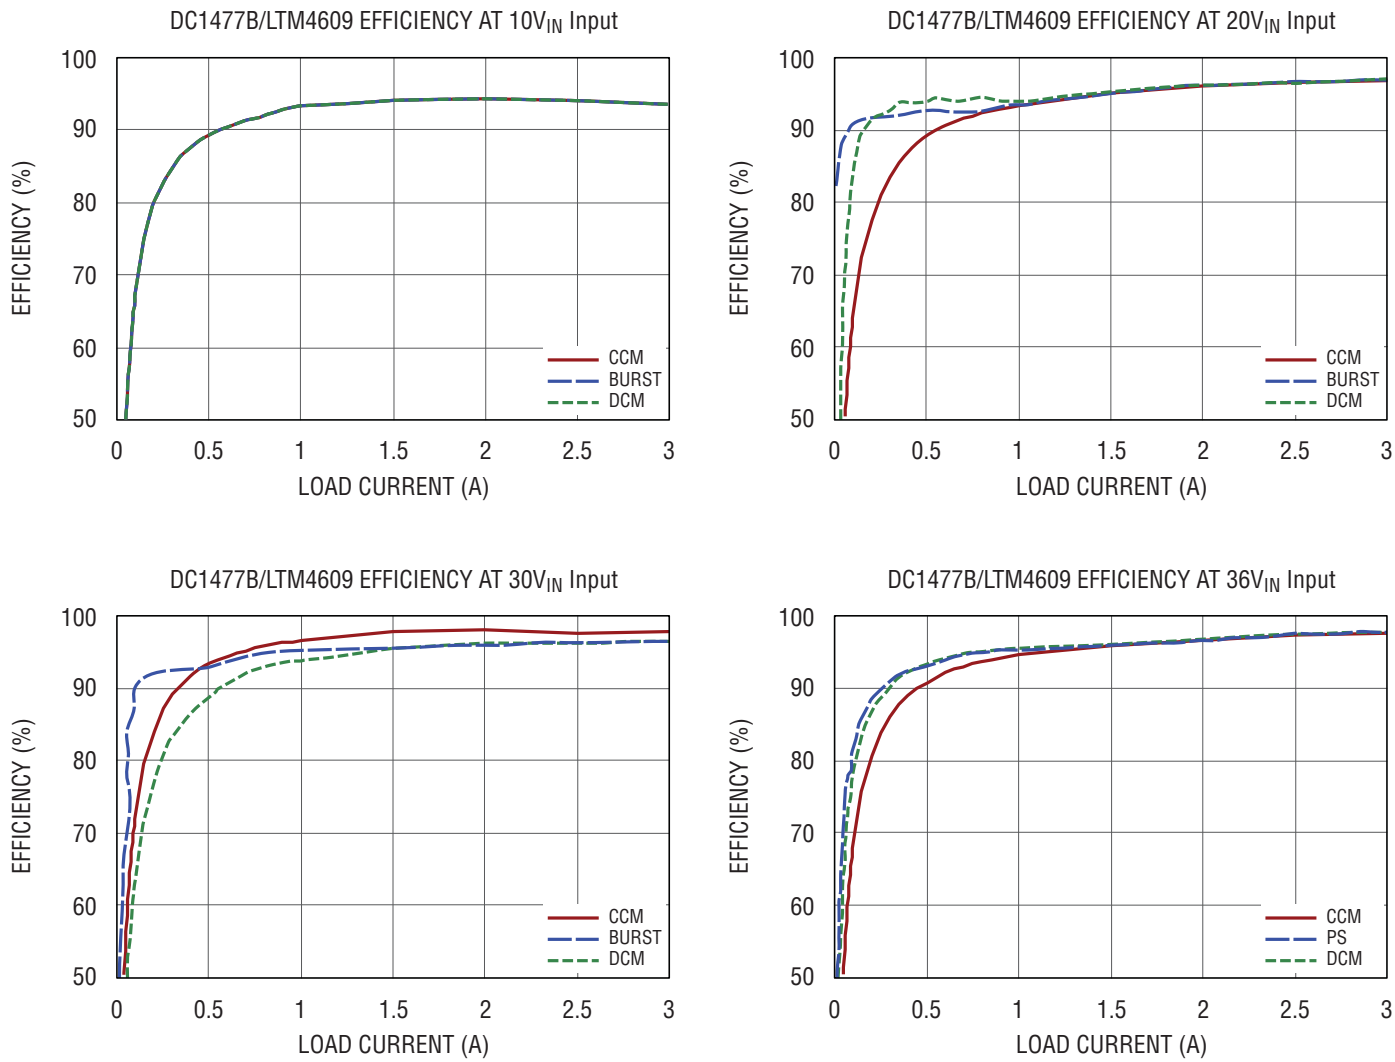


Figure 3. Measured Efficiency at Different V_{IN}

QUICK START PROCEDURE



$V_{IN} = 10V$, $V_{OUT} = 30V$, CCM MODE
1.5A to 3A LOAD STEP
 $C_{OUT} = 2 \times 10\mu F$ CERAMIC + $2 \times 100\mu F$ ALUM

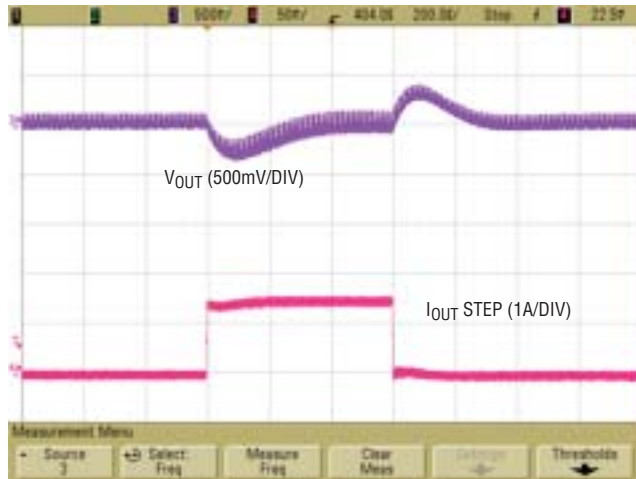

$V_{IN} = 36V$, $V_{OUT} = 30V$, CCM MODE
1.5A to 3A LOAD STEP
 $C_{OUT} = 2 \times 10\mu F$ CERAMIC + $2 \times 100\mu F$ ALUM

Figure 4. Measured Load Transient Response (1.5A Step, 50% to 100%)



$V_{IN} = 10V$, $V_{OUT} = 30V$, $I_{OUT} = 3A$
W/O INPUT FILTER: SHORT L2 AND L3. REMOVE C_{IN2}
 V_{IN} = PEAK-TO-PEAK RIPPLE = 2.78V



$V_{IN} = 10V$, $V_{OUT} = 30V$, $I_{OUT} = 3A$
W/ INPUT FILTER: STUFF L2, L3, AND C_{IN2}
 V_{IN} PEAK-TO-PEAK RIPPLE = 0.47V


Figure 5. Input Voltage Ripple Measured at C_{IN1} with 300MHz BW Probe, with and without the Input Filter

DEMO MANUAL DC1477B

PARTS LIST

ITEM	QTY	REFERENCE	PART DESCRIPTION	MANUFACTURER/PART NUMBER
Required Circuit Components				
1	1	CSS	CAP, X7R, 0.1µF, 25V, 10%, 0603	AVX, 06033C104KAT4A
2	1	CIN1	CAP, Aluminum, 100µF, 20%, 50V	SANYO, 50ME100WX+TS
3	2	CO3, CO4	CAP, X7R, 10µF, 35V, 10%, 1210	MURATA, GRM32ER7YA106KA12L
4	3	CIN2, CIN3, CIN4	CAP, X7R, 4.7µF, 50V, 10%, 1206	Taiyo Yuden, UMK316BJ475KL-T
5	2	CO5, CO6	CAP, Aluminum, 100µF, 35V	SANYO, 35HVH100M
6	1	L1	IND. POWER IND, 3.3µH	VISHAY, IHLP5050FDER3R3M01
7	1	R1	RES., CHIP, 100k, 1/16W, 5%, 0603	VISHAY, CRCW0603100KJNEA
8	1	R5	RES., CHIP, 2.74k, 1/16W, 1%, 0603	VISHAY, CRCW06032K74FKEA
9	1	R6	RES., CHIP, 4.64k, 1/16W, 1%, 0603	VISHAY, CRCW06034K64FKEA
10	1	R7	RES., CHIP, 1.21k, 1/16W, 1%, 0603	VISHAY, CRCW06031K21FKEA
11	2	RS1, RS2	RES., CHIP, 0.007 0.25W, 1%, 1206	VISHAY, WSL12067L000FEA
12	1	U1	I.C., LTM4609EV#PBF, 15mm × 15mm × 2.8mm, LGA	LINEAR TECH., LTM4609EV#PBF
Additional Demo Board Circuit Components:				
1	0	CIN5, CSNB1, CSNB2 (OPT)	CAP, 1206	
2	0	C2, C4, C5, CP, CFF (OPT)	CAP, 0603	
3	0	CO1, CO2 (OPT)	CAP, SVP, 100µF, D3L	
4	0	CO7 (OPT)	CAP, 1206, 35V	
5	0	CO8 (OPT)	POSCAP, D3L	
6	2	D1, D2	ZENER DIODE, 4.7V	Central Semi., CMDZ5230B-7-F
7	2	L2, L3	IND. POWER IND, 0.4µH, 1806	Fair-Rite, 2518065007Y6
8	1	R2	RES., CHIP, 51k, 1/16W, 5%, 0603	VISHAY, CRCW060351K0JNEA
9	1	R8	RES., CHIP, 20k, 1/16W, 1%, 0603	VISHAY, CRCW060320K0FKEA
10	0	RS3, RSNB1, RSNB2 (OPT)	RES., 1206	
11	0	R9, RUVLO (OPT)	RES., 0603	
Hardware For Demo Board Only:				
1	2	JP1, JP2	2mm SINGLE ROW HEADER, 3-PIN	SAMTEC, TMM-103-02-L-S
2	2	JP3, JP4	2mm SINGLE ROW HEADER, 4-PIN	SAMTEC, TMM-104-02-L-S
3	4	JP1, JP2, JP3, JP4	SHUNT,	SAMTEC, 2SN-BK-G
4	10	TP1, TP4, TP5, TP7, TP9, TP11-TP15	TESTPOINT, TURRET, .095"	MILL-MAX, 2501-2-00-80-00-00-07-0
5	4	TP2, TP3, TP8, TP10	BANANA JACK,	KEYSTONE, 575-4
6	4	STAND-OFF	STAND-OFF, NYLON 0.50" TALL	KEYSTONE, 8833 (SNAP ON)

SCHEMATIC DIAGRAM

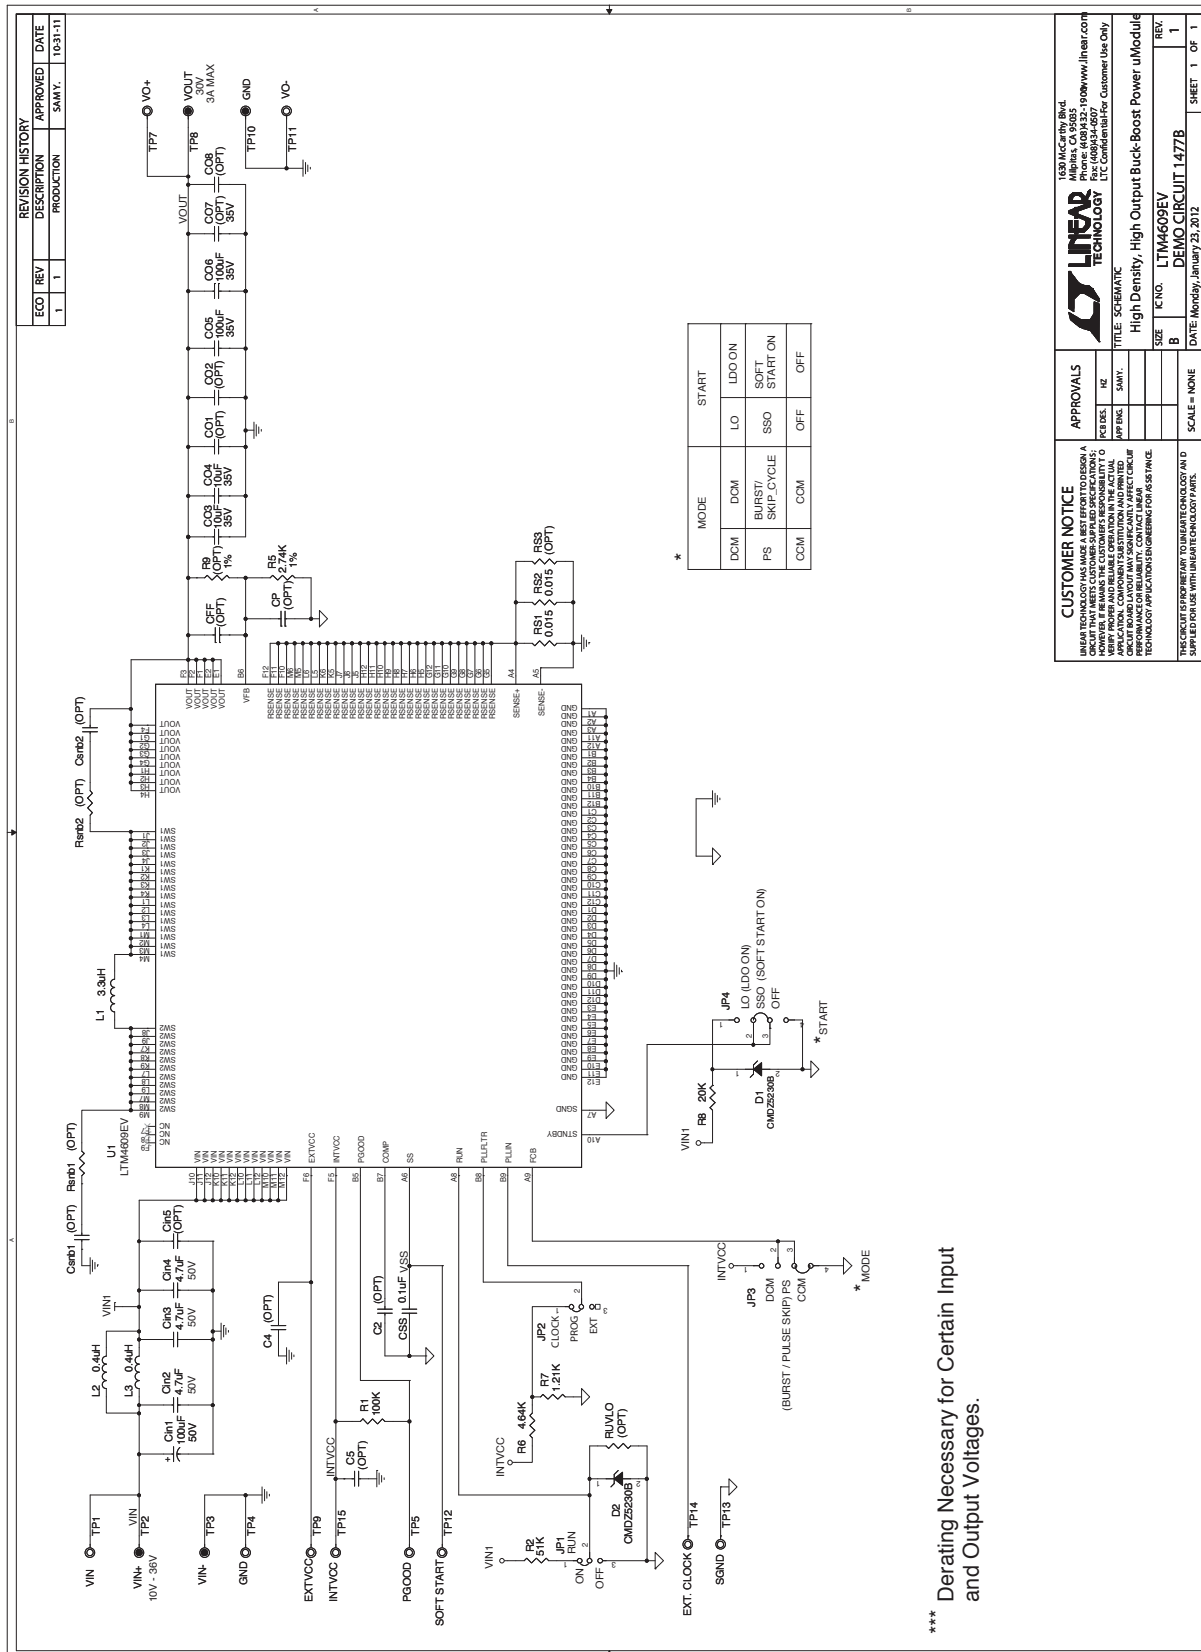

DEMO MANUAL DC1477B

DEMONSTRATION BOARD IMPORTANT NOTICE

Linear Technology Corporation (LTC) provides the enclosed product(s) under the following **AS IS** conditions:

This demonstration board (DEMO BOARD) kit being sold or provided by Linear Technology is intended for use for **ENGINEERING DEVELOPMENT OR EVALUATION PURPOSES ONLY** and is not provided by LTC for commercial use. As such, the DEMO BOARD herein may not be complete in terms of required design-, marketing-, and/or manufacturing-related protective considerations, including but not limited to product safety measures typically found in finished commercial goods. As a prototype, this product does not fall within the scope of the European Union directive on electromagnetic compatibility and therefore may or may not meet the technical requirements of the directive, or other regulations.

If this evaluation kit does not meet the specifications recited in the DEMO BOARD manual the kit may be returned within 30 days from the date of delivery for a full refund. THE FOREGOING WARRANTY IS THE EXCLUSIVE WARRANTY MADE BY THE SELLER TO BUYER AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED, IMPLIED, OR STATUTORY, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE. EXCEPT TO THE EXTENT OF THIS INDEMNITY, NEITHER PARTY SHALL BE LIABLE TO THE OTHER FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.

The user assumes all responsibility and liability for proper and safe handling of the goods. Further, the user releases LTC from all claims arising from the handling or use of the goods. Due to the open construction of the product, it is the user's responsibility to take any and all appropriate precautions with regard to electrostatic discharge. Also be aware that the products herein may not be regulatory compliant or agency certified (FCC, UL, CE, etc.).

No License is granted under any patent right or other intellectual property whatsoever. **LTC assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or any other intellectual property rights of any kind.**

LTC currently services a variety of customers for products around the world, and therefore this transaction **is not exclusive**.

Please read the DEMO BOARD manual prior to handling the product. Persons handling this product must have electronics training and observe good laboratory practice standards. **Common sense is encouraged.**

This notice contains important safety information about temperatures and voltages. For further safety concerns, please contact a LTC application engineer.

Mailing Address:

Linear Technology
1630 McCarthy Blvd.
Milpitas, CA 95035

Copyright © 2004, Linear Technology Corporation