



NetBurner's Network Development Kit

CFV2-40 Hardware Manual

**Revision 1.0
July 24, 2007
Released**

Table of Contents

1. Introduction	3
1.1. Additional Documentation	3
2. Hardware Features	4
3. Software Features	4
4. Life Support Disclaimer	5
5. Hardware Specifications	6
5.1. Diagram	6
5.2. Mechanical	6
5.3. Power Requirements	7
5.4. LED Display	7
5.5. Dip Switches	7
5.6. Interface Connector	7
5.7. Debug Port	8
5.8. RS-232 Port1 DB9	8
5.9. RJ-45 Connector	9
5.10. Miscellaneous I/O Connector	9
5.11. Memory Map	10
5.12. Hardware Resources	11

1. Introduction

NetBurner is your single source for hardware, software, development kits, tools, technical support, and custom design services. These elements are combined in a unique package that lets you concentrate on developing your product instead of reinventing network protocols and designing hardware.

NetBurner solutions also allow you to reduce risk and improve functionality with a complete proven design, including hardware, TCP/IP Stack, RTOS, and all necessary tools. NetBurner is indeed the fastest way to network enable your product.

Whether you want to design your own hardware, or are looking for a standard off-the-shelf network solution - NetBurner provides the software, hardware, and tools to get your product to market in the shortest possible time.

NetBurner offers a full line of services from board level designs and hourly consulting to complete turnkey systems. NetBurner also offers a Royalty-Free License option. Please contact our [Sales](#) Department for more information on any of these options.

Please ensure that your NetBurner Network Development Kit is registered by going to our [Support](#) site now to set up your account. Registration is quick and easy. The registration data stored on NetBurner's server will **not** be sold, exchanged, or knowingly released to third parties **without** prior written permission from the individuals affected.

1.1. Additional Documentation

- CFV2-40 (Hard Copy) Quick Start Guide
- NNDK User's Manuals are located (by default) in C:\Nburn\docs
- An NNDK Programmer's Guide is located (by default) in C:\Nburn\docs
- An NBEclipse Getting Started Guide is located (by default) in C:\Nburn\docs
- All License Information is located (by default) in C:\Nburn\docs
- All [Freescale](#) Manuals are located (by default) in C:\Nburn\docs
- All GNU Information is located (by default) in C:\Nburn\docs

2. Hardware Features

- Motorola ColdFire 5206e Processor at 40MHz
- 512 KB of FLASH providing 1 MB of compressed space (80k used by system)
- 8 KB of Non-volatile user parameter storage (expandable)
- 4 MB of DRAM
- 10BaseT Ethernet connectivity
- 2 channels DMA
- Dual programmable UARTs
- BDM debug module interface connector
- Switching Power Supply accepts 7-24 VDC
- 60-pin interface connector for custom hardware

3. Software Features

- Configuration through web browser, telnet, NetBurner's IPSetup utility, or SNMP (supports MIB-II)
- Password protection
- Firmware updates through network or serial connections
- Network Protocols Supported: ARP, HCP, BOOTP, TCP, UDP, ICMP, Telnet, HTTP, and SNMP (**optional**)
- SSL Support (**optional**)

Please contact our [Sales](#) Department for more information.

4. Life Support Disclaimer

NetBurner's CFV2-40 Processor Board is **not** authorized for use as a critical component in life support devices or systems, **without** the express written approval of NetBurner, Inc. prior to use. As used herein:

Life support devices or systems are devices or systems that (a) are intended for surgical implant into the body or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.

A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

NetBurner, Inc. makes no representations or warranties with respect to the contents of this manual and specifically disclaims any implied warranties of merchantability or fitness for any particular purpose. Further, NetBurner, Inc. reserves the right to revise this manual, make changes, and/or discontinue it without notice. Every effort has been made to ensure all information is correct, but NetBurner, Inc. is not responsible for inadvertent errors.

This manual contains links to third-party web sites that are not under the control of NetBurner, and NetBurner is not responsible for the content on any linked site. If you access any third party sites listed in this manual, then you do so at your own risk. NetBurner provides these links only as a convenience, and the inclusion of the link does not imply that NetBurner endorses or accepts any responsibility for the content on those third-party sites.

Under copyright laws, the documentation for NetBurner's CFV2-40 Processor Board may not be copied, photocopied, reproduced, translated or reduced to any electronic medium or machine-readable form, in whole or in part, without prior written consent of NetBurner, Inc. NetBurner and the NetBurner logo are trademarks of NetBurner, Inc.

[NetBurner, Inc.](#)

5405 Morehouse Drive, Suite 200
San Diego, CA 92121 USA

[NetBurner Sales](#)


[NetBurner Support](#)

858-558-0293 (Telephone)
858-558-8549 (Fax)

Copyright © 2007 NetBurner Inc., All rights reserved.

5. Hardware Specifications

5.1. Diagram

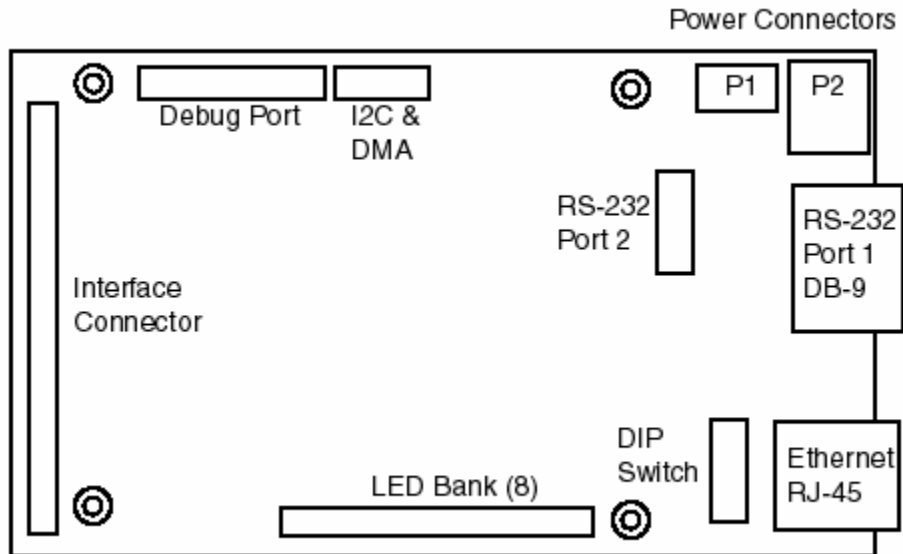

* PCB Rev 1.2

5.2. Mechanical

- PCB Dimensions: 6.0" x 3.5"
- RS-232 Port1: DB9
- RS-232 Port2: 10 Pin Dual Row Header
- Ethernet: Four Wire RJ-45
- Interface Connector: 60 Pin Dual Row Header
- ColdFire BDM: 26 Pin Dual Row Header
- Xilinx Programming: 6 Pin Single Row Header (JTAG)
- Dip Switch: 4 On/Off Switches
- Reset Switch: Single Pushbutton Switch
- I2C and DMA: 10 Pin Dual Row Header
- P1 Power: 2 Input Screw Terminal
- P2 Power: 2.0 mm Female Jack

5.3. Power Requirements

7 to 22V DC at less than 500mA. The user may draw additional power, up to 200mA @ 5V, from the 60-pin Interface connector. The maximum voltage rating of the switching power supply is 24.0 VDC. There are two power connectors, either of which can be used to provide power to the board. P1 is a 2 input screw terminal and P2 is a 2.0 mm female jack input.

5.4. LED Display

There are 8 LEDs available for custom application use. They are visible from the top and side of the board assembly. They are also useful in debugging when the OS Show Tasks option is used to indicate the active task.

5.5. Dip Switches

The 4 dip switches are not used by the system, and are available for user functions like setting options/modes for the application.

5.6. Interface Connector

For connecting the NetBurner CFV2-40 PCB to application-specific hardware

1	Vcc	11	A8	21	A14	31	D16	41	D24	51	A5
2	Vcc	12	IRQ1	22	A15	32	D17	42	D25	52	A4
3	CLK	13	IRQ7	23	/CS3	33	D18	43	D26	53	A3
4	/RST	14	A9	24	A25	34	D19	44	D27	54	A2
5	IRQ4	15	A10	25	A26	35	D20	45	D28	55	A1
6	TA	16	A11	26	/CS1	36	D21	46	D29	56	A0
7	ATA	17	A12	27	A27	37	D22	47	D30	57	GND
8	TS	18	A13	28	R/W	38	D23	48	D31	58	GND
9	GND	19	Vcc	29	GND	39	Vcc	49	A7	59	GND
10	GND	20	Vcc	30	GND	40	Vcc	50	A6	60	GND

5.7. Debug Port

The NetBurner CFV2-40 supports

1. Real-Time Trace Support
2. Background Debug Mode (BDM)
3. Real-Time Debug Support

1	-	11	GND	21	-
2	/BKPT	12	PST3	22	-
3	GND	13	PST2	23	GND
4	DSCLK	14	PST1	24	CLK
5	Gnd	15	PST0	25	Vcc
6	-	16	DDATA3	26	TEA
7	/RST	17	DDATA2		
8	DSI	18	DDATA1		
9	*Vcc3V	19	DDATA0		
10	DSO	20	GND		

* No connection unless a jumper is installed

5.8. RS-232 Port1 DB9

1	-
2	TX
3	RX
4	-
5	GND
6	-
7	-
8	-
9	-

5.9. RJ-45 Connector

1	TX+
2	TX-
3	RX+
4	-
5	-
6	RX-
7	-
8	-
9	GND
10	-

5.10. Miscellaneous I/O Connector

1	TIN 0
2	TOUT 0
3	TIN 1
4	TOUT 1
5	-
6	SDA
7	-
8	SCL
9	GND
10	GND

* PCB Rev 1.1 only

5.11. Memory Map

Memory Region	Address Range	Region Description
Undefined	0x00000000 to 0x01FFFFFF	Undefined Area to Catch NULL pointers
DRAM	0x02000000 to 0x023FFFFFF	The DRAM
Undefined	0x02400000 to 0x0FFFFFFF	-
MBAR	0x10000000 to 0x100001FF	The 5206e internal register mapping.
Undefined	0x10000200 to 0x1FFFFFFF	-
RAMBAR	0x20000000 to 0x20001FFF	The 5260E Internal Static RAM
VBR	0x20000000 to 0x200003FF	The 5206e Vector Base Register
Undefined	0x20002000 to 0x4000FFFF	-
Ethernet Controller	0x40010000 to 0x4001003F	The Davicom DM9008
LED's and Switches	0x40010040 to 0x400100FF	-
Undefined	0x40020000 to 0xFFBFFFF	-
Flash Memory	0xFFC00000 to 0xFFFFFFFF	The Whole Flash chip
Flash Monitor	0xFFC00000 to 0xFFC03FFF	The Boot Monitor
Monitor Params	0xFFC04000 to 0xFFC05FFF	Monitor Parameter Storage
User Params	0xFFC06000 to 0xFFC07FFF	User Parameter Storage
Application Code	0xFFC08000 to	Compressed Application Code

5.12. Hardware Resources

Resource	Usage
*CS0	Used for the Flash
*CS1	Unused
*CS2	Used for Ethernet and LED's
*CS3	Unused
A24/*CS4	Unused
A25/*CS5	Unused
A26/*CS6	Unused
A37/*CS7	Unused
IRQ1	Used for Ethernet
IRQ2	Unused, but not exposed externally.
IRQ3	Used by Serial and PPP drivers. Can be shared, but it is not exposed externally.
IRQ4	Unused
IRQ5	Used for system timer tick. Not exposed externally, can not be shared.
IRQ6	Unused, but not exposed externally.
IRQ7	Unused.