


THIS SKETCH IS FOR QUOTATION
PURPOSES ONLY

FINISH
(TICK APPLICABLE):

☐ 100% TIN
☐ GOLD

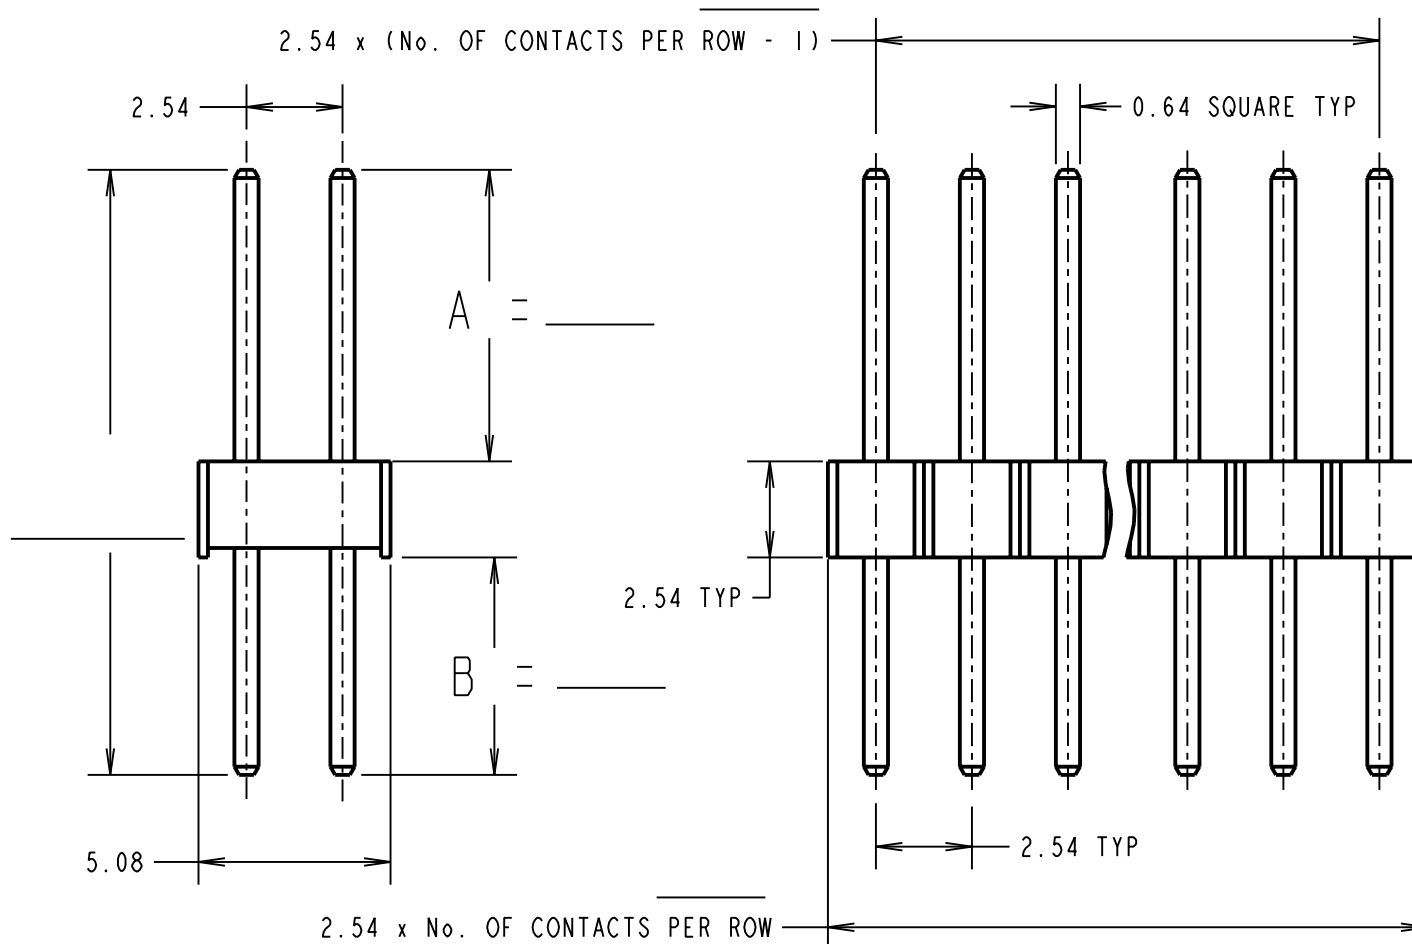

NOTES:

1. MAXIMUM PERMISSIBLE OUT OF SQUARE OF PIN TO MOULDING TO BE 0.10mm IN ANY DIRECTION.
2. CONTACT LEG VARIATION ON COMPLETE ASSEMBLY NOT TO EXCEED 0.10mm.

SPECIFICATION:

MATERIAL:

MOULDING = HIGH TEMPERATURE
NYLON 6T, UL94V-0, BLACK

PINS = BRASS

FINISH:

PINS: SEE BOX ABOVE

ELECTRICAL:

CURRENT RATING = 3A MAX

CONTACT RESISTANCE = 30 mΩ MAX

INSULATION RESISTANCE = 10,000 MΩ MIN

DIELECTRIC STRENGTH = 750V AC/DC

ENVIRONMENTAL:

TEMPERATURE RANGE = -40°C TO +105°C

PACKING:

BAG

DATE OF SKETCH:

REQUESTED BY:

No. OF CONTACTS
PER ROW:

HARWIN

HARWIN INC
U.S.A.

HARWIN PLC
U.K.

HARWIN PTE
SINGAPORE

TEL: (812) 542 2540
FAX: (812) 542 2541

TEL: 023 9231 4545
FAX: 023 9231 4590

TEL: 65 6779 4909
FAX: 65 6779 3868

THIS DRAWING AND ANY
INFORMATION OR DESCRIPTIVE
MATTER SET OUT HEREON ARE
CONFIDENTIAL AND COPYRIGHT
PROPERTY OF THE HARWIN
GROUP AND MUST NOT BE
DISCLOSED, LOANED, COPIED
OR USED FOR MANUFACTURING,
TENDERING OR FOR ANY
OTHER PURPOSE WITHOUT
THEIR WRITTEN PERMISSION.

TOLERANCES

X. = ±1mm
X.X = ±0.25mm
X.XX = ±0.10mm
X.XXX = ±0.01mm

ANGLES = ±5°

UNLESS STATED

TITLE:

2.54mm PITCH DIL VERTICAL
PC TAIL PIN HEADER VARIANT

DRAWING No.:

M20- _____ W _____

SHT
1 OF 1