

6U MAXI COMPACT SYSTEM 1.0 - 22.0KW 48V DC


Enatel DC power systems are the ideal solutions for powering telecommunications and data networks requiring 24V, 48V or 60V DC.

We offer a range of solutions for applications from small standalone systems for applications like access nodes to medium sized systems for radio base stations for mobile networks to larger systems for central office power applications.

These compact systems are configured using Enatel's state of the art high frequency switch mode rectifier modules and intelligent network capable controllers. They include built in DC load and battery distribution and can be customized and configured to meet a wide range of customer requirements for access power solutions.

If you require any further information on Enatel's all new range of Maxi Compact DC Power Systems contact us today.

- World leading power density.
- Fully featured telecom grade rectifiers.
- Network monitoring available.
- Modular 19" design for ease of installation.
- European standard DIN circuit breakers.
- More room for revenue generating equipment.
- Upgrade existing systems to higher power.
- High reliability means less cost of maintenance.
- Full remote monitoring available means less site visits and less cost.

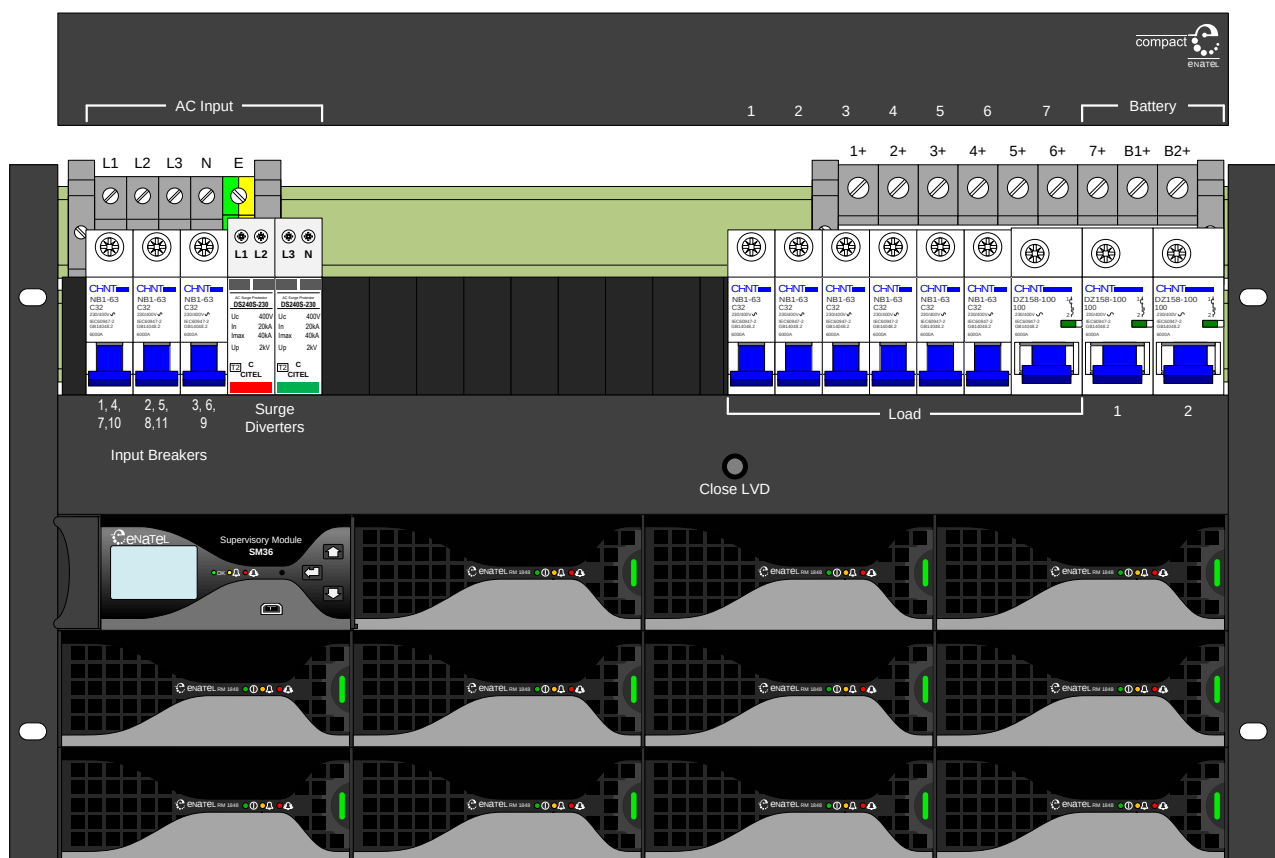

SPECIFICATIONS

AC Input:	Three phases (3L+N+E) & one phase (L+N+E) with phase linked.
Frequency Range:	45-65Hz
Power Factor:	>0.99 (full load)
Termination:	Three phase L1, L2, L3, N, E 16mm ² terminal blocks.
Protection:	Isolation by MCB 63A-3P Surge protection by 3 phases and neuter (40A max. 8/20us) SPDs.



DC Output	
Nominal Voltage:	-48V
Rated System Output Power:	22000W @ -48V DC
Polarity:	Positive earth. (negative earth available to special order).
DC Distribution:	
Load:	5x 50A, 1x 63A, 1x 100A load circuit breakers.
Battery:	2 x 125A battery circuit breakers.
Breaker Fail Detection:	Electronic fail detection on both load and battery breakers.
DC Terminals (rear connected):	
Load:	35mm ² tunnel terminals
Battery:	35mm ² tunnel terminals.
Low Voltage Disconnect:	500A battery latching LVD fitted as standard.

Mechanical

Dimensions, W, H, D:	482.6mm (standard 19" module), 266.7mm (6U, 10½"), 350mm (13¾") (390mm with cable strain relief)
Weight:	17.5kg (excluding rectifier modules)
Shipping Dimensions, W, H, D:	540mm, 350mm, 435mm
Weight:	39.5kg (excluding rectifier modules)

Monitoring & Control:	Various monitoring options are available via the Enatel SM30 series of control & supervisory modules. Standard features include full temperature compensation, automated and manual battery testing/equalisation and three voltage-free relay alarm outputs. Options include extension I/O PCBs that give an extra 6x digital inputs, 6x analogue inputs and 8x voltage-free relay outputs. For further details, refer to the SM30 series of brochures.
-----------------------	---

Part Numbers:	Actual part numbers will vary with configuration.
PSC 022110650-F34	6U Maxi Compact System, Front connection, including SM35 supervisory and LVD closing switch.
PSC 022110650-F35	6U Maxi Compact System, Front connection including SM35 supervisory and LVD closing switch, ACM peripheral module.
PSC 022110660-F35	6U Maxi Compact System, Front connection, including SM36 supervisory and LVD closing switch, ACM peripheral module.