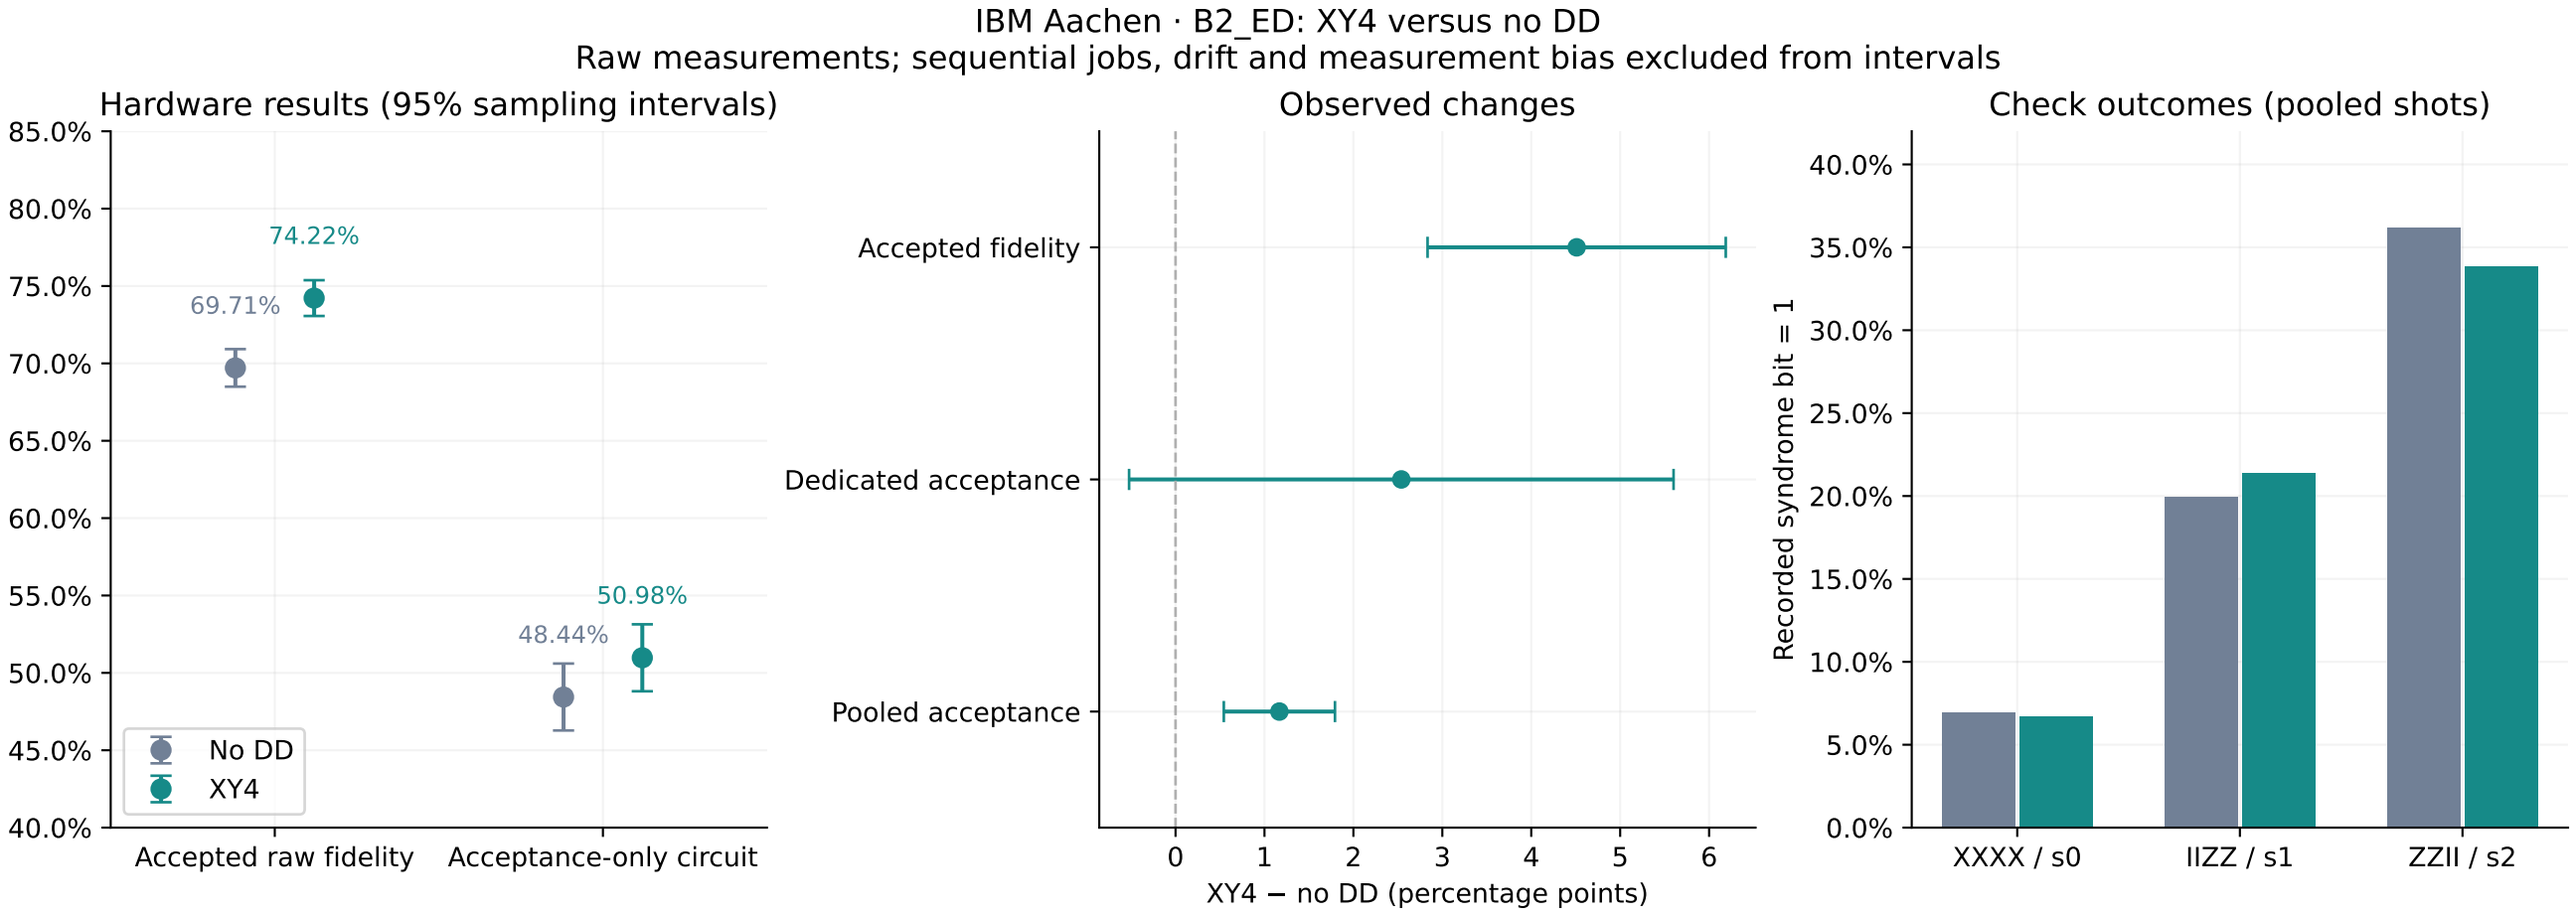
IBM Aachen · B2_ED: XY4 versus no DD
Raw measurements; sequential jobs, drift and measurement bias excluded from intervals
Hardware results (95% sampling intervals)
85.0%
80.0%
75.0%
70.0%
65.0%
60.0%
55.0%
50.0%
45.0%
40.0%
74.22%
69.71%
50.98%
48.44%
No DD
XY4
Accepted raw fidelity
Acceptance-only circuit
Observed changes
Accepted fidelity
Dedicated acceptance
Pooled acceptance
0
1
2
3
4
5
6
XY4 − no DD (percentage points)
Check outcomes (pooled shots)
Recorded syndrome bit = 1
40.0%
35.0%
30.0%
25.0%
20.0%
15.0%
10.0%
5.0%
0.0%
XXXX / s0
IIZZ / s1
ZZII / s2