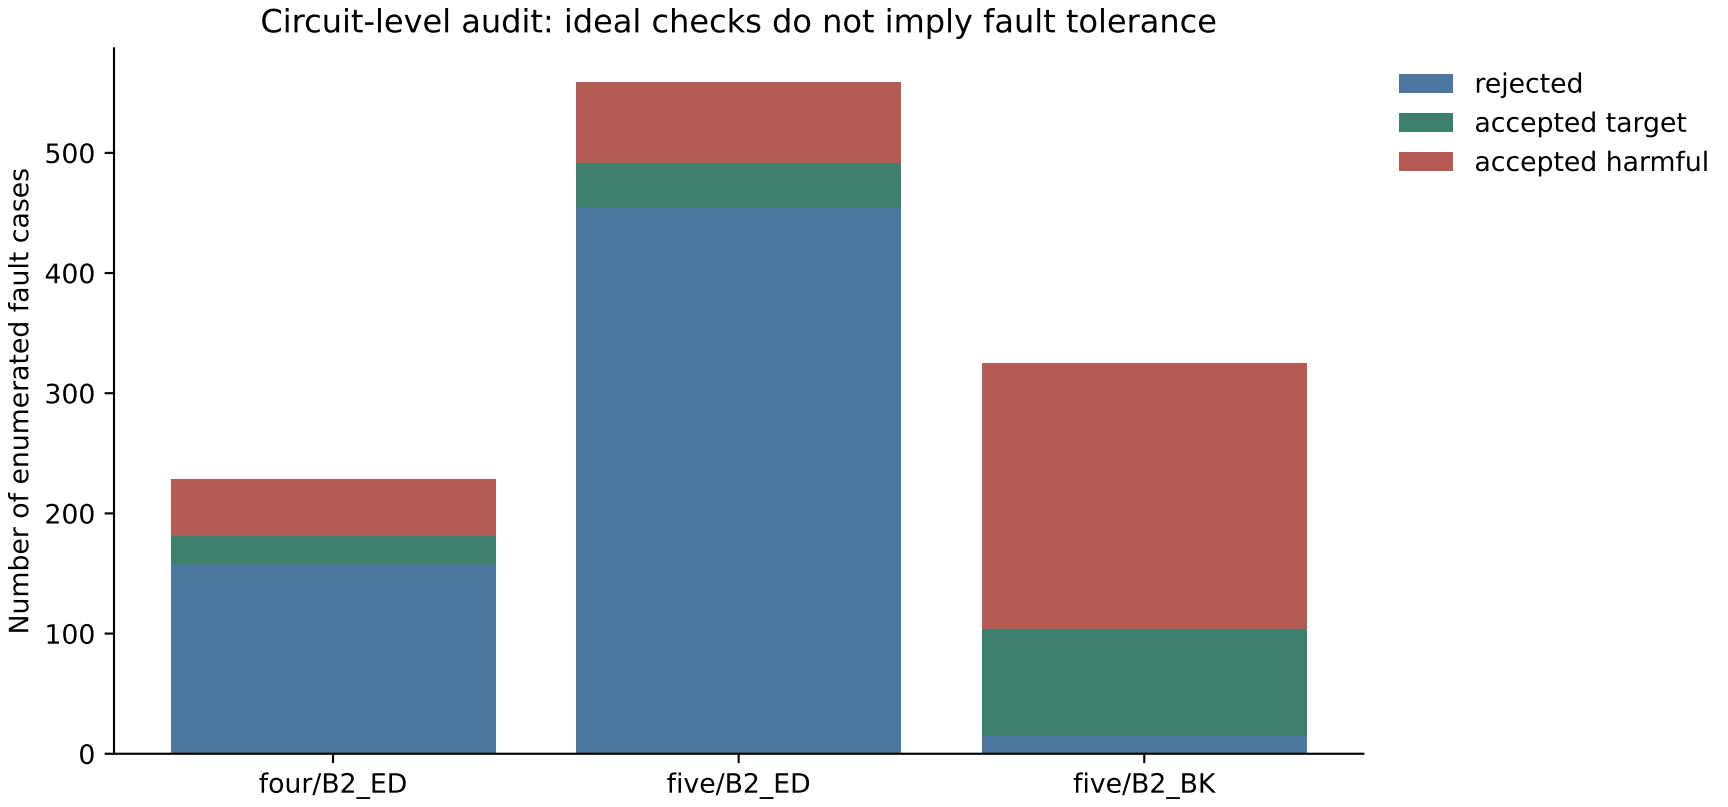
Circuit-level audit: ideal checks do not imply fault tolerance
Number of enumerated fault cases
0
100
200
300
400
500
four/B2_ED
five/B2_ED
five/B2_BK
rejected
accepted target
accepted harmful