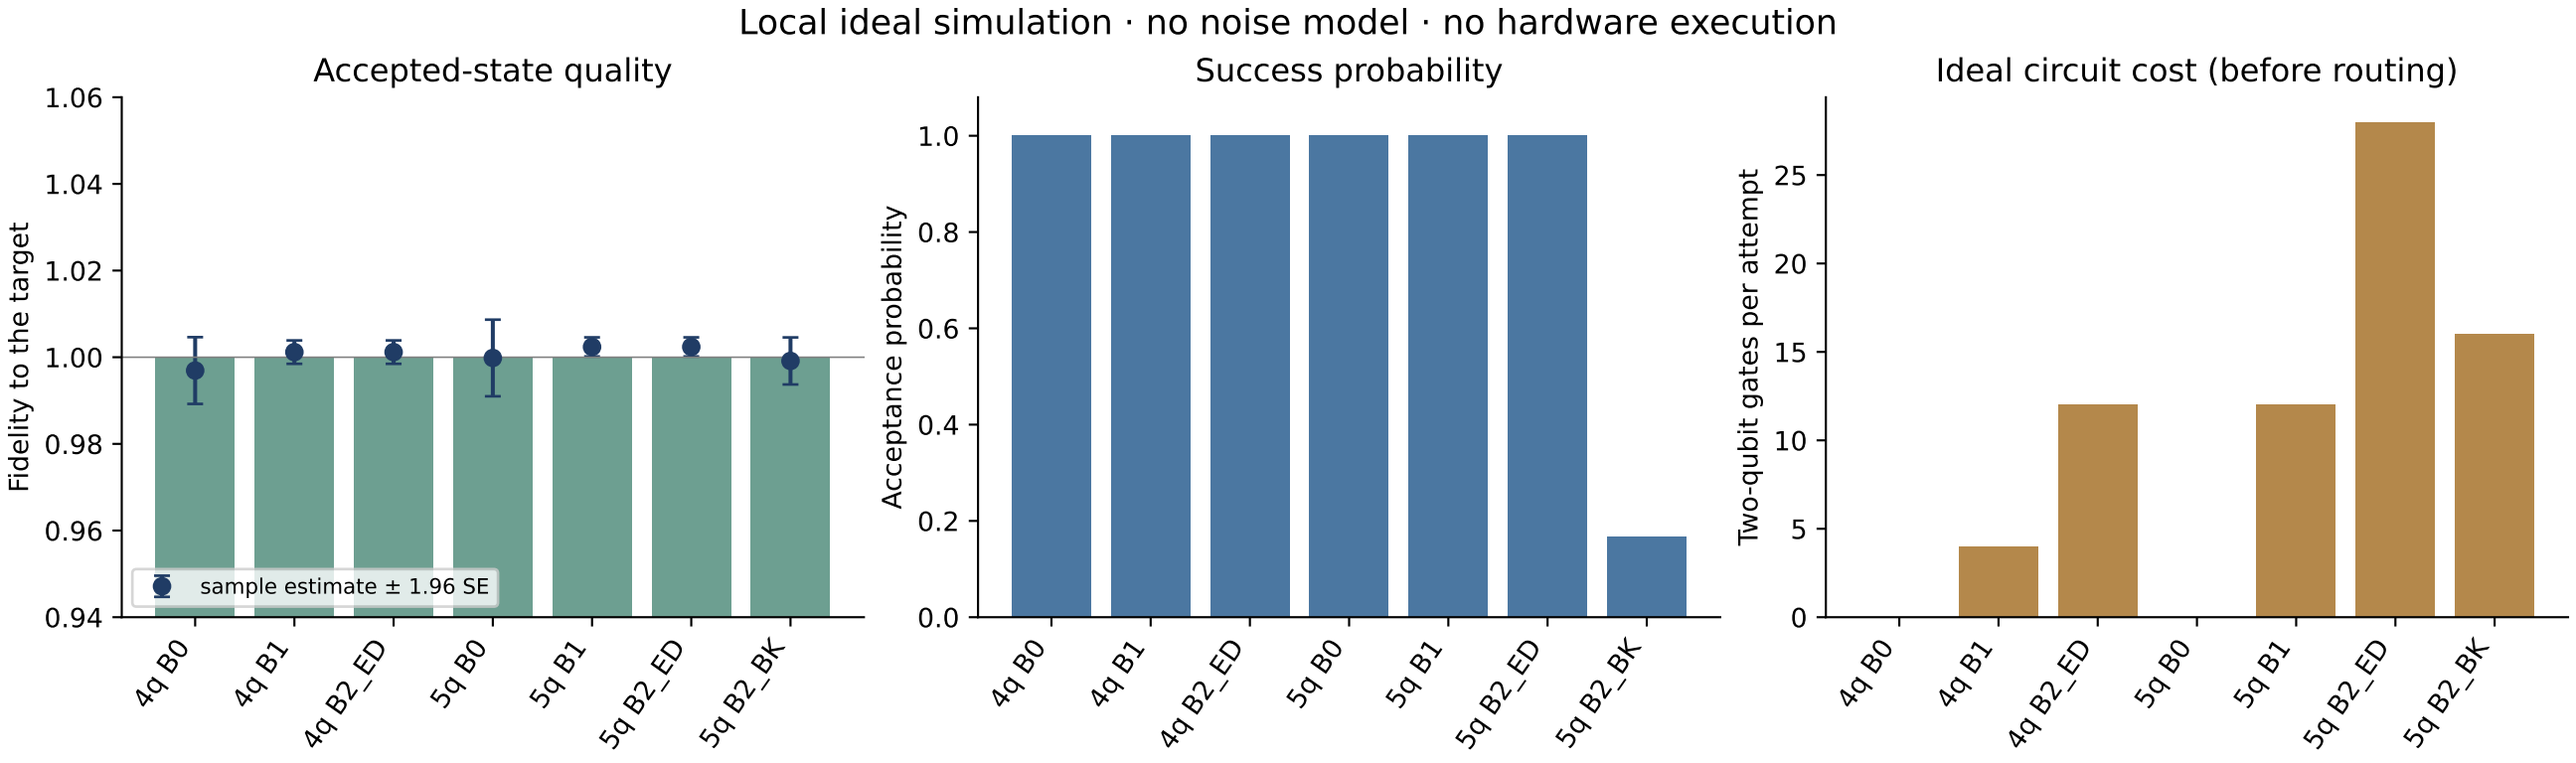
Local ideal simulation · no noise model · no hardware execution
Accepted-state quality
Fidelity to the target
1.06
1.04
1.02
1.00
0.98
0.96
0.94
sample estimate ± 1.96 SE
4q B0
4q B1
4q B2_ED
5q B0
5q B1
5q B2_ED
5q B2_BK
Success probability
Acceptance probability
1.0
0.8
0.6
0.4
0.2
0.0
4q B0
4q B1
4q B2_ED
5q B0
5q B1
5q B2_ED
5q B2_BK
Ideal circuit cost (before routing)
Two-qubit gates per attempt
25
20
15
10
5
0
4q B0
4q B1
4q B2_ED
5q B0
5q B1
5q B2_ED
5q B2_BK