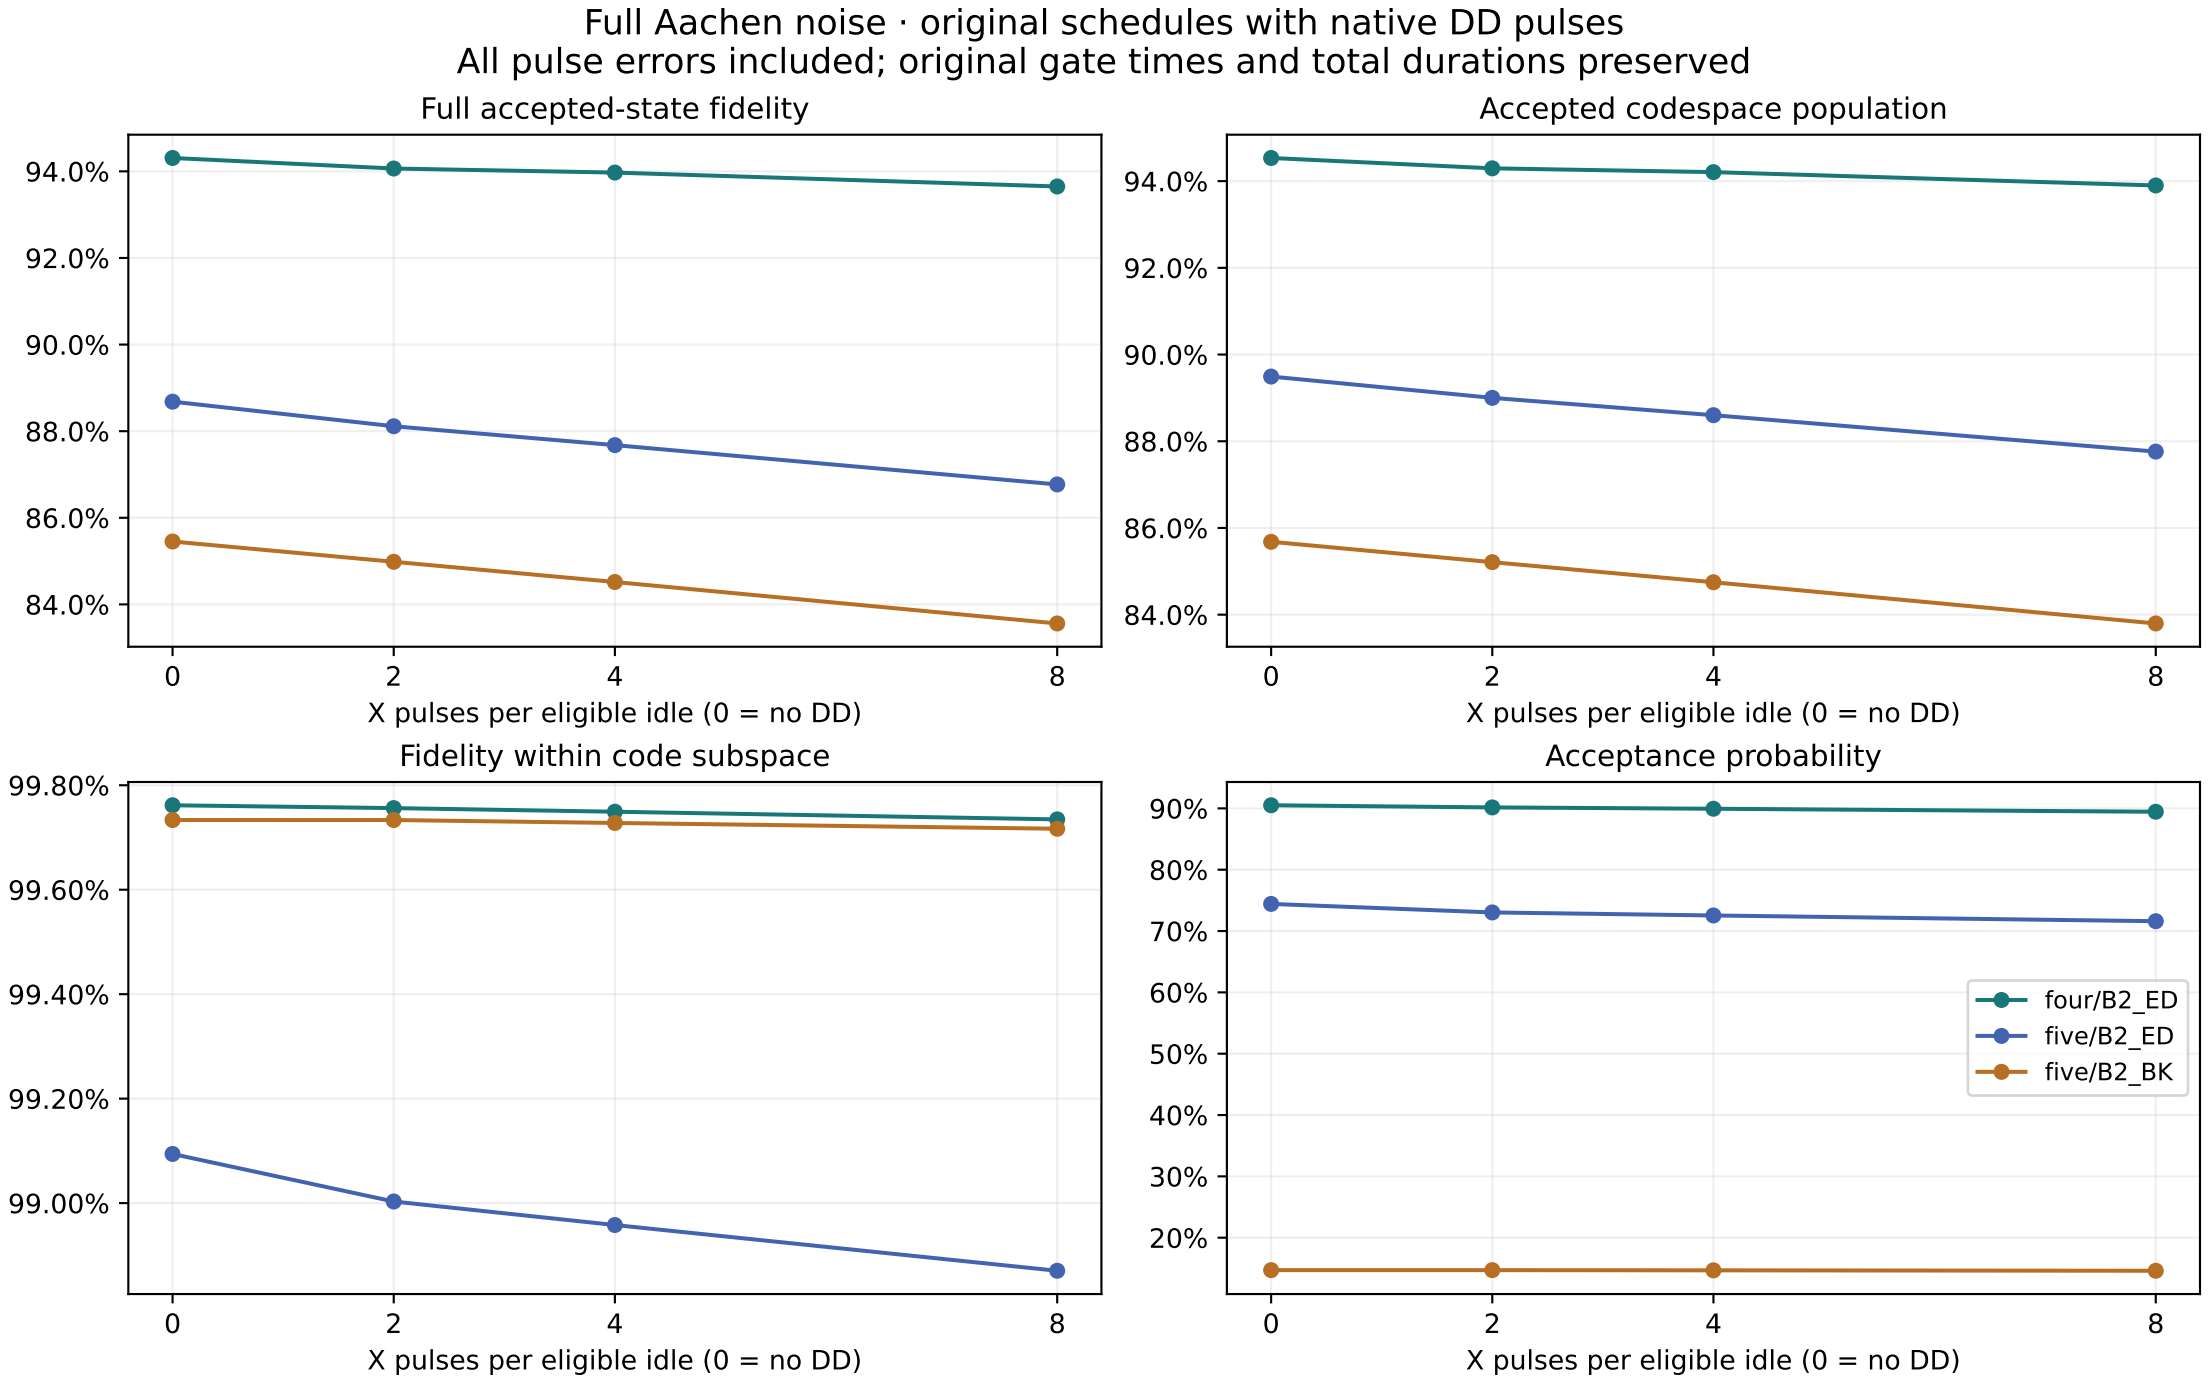
Full Aachen noise · original schedules with native DD pulses
All pulse errors included; original gate times and total durations preserved
Full accepted-state fidelity
94.0%
92.0%
90.0%
88.0%
86.0%
84.0%
0
2
4
8
X pulses per eligible idle (0 = no DD)
Accepted codespace population
94.0%
92.0%
90.0%
88.0%
86.0%
84.0%
0
2
4
8
X pulses per eligible idle (0 = no DD)
Fidelity within code subspace
99.80%
99.60%
99.40%
99.20%
99.00%
0
2
4
8
X pulses per eligible idle (0 = no DD)
Acceptance probability
90%
80%
70%
60%
50%
40%
30%
20%
four/B2_ED
five/B2_ED
five/B2_BK
0
2
4
8
X pulses per eligible idle (0 = no DD)