


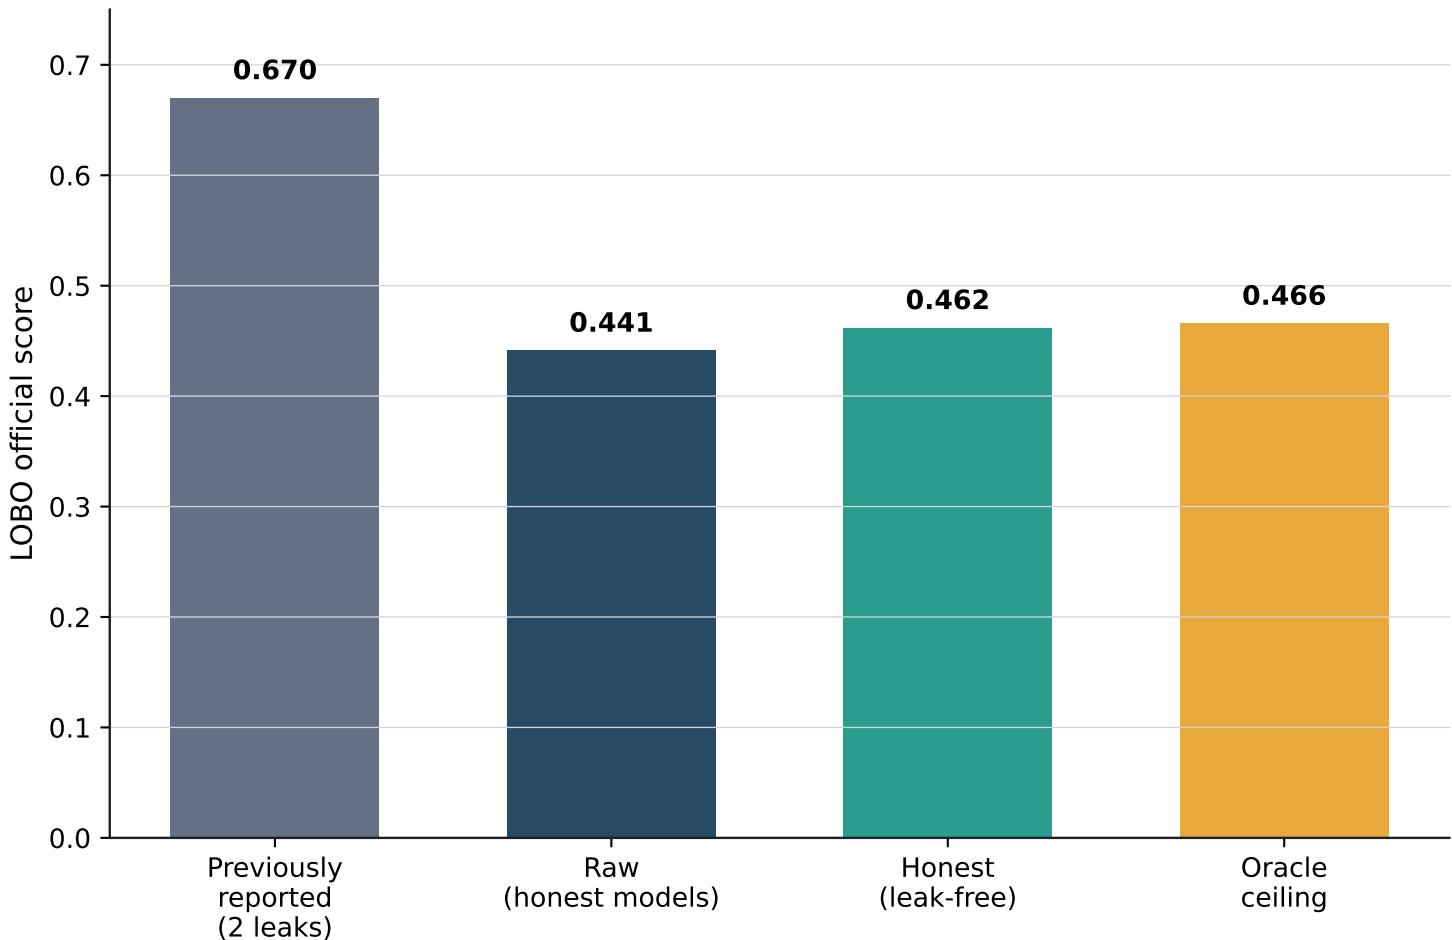

Leaks removed: (1) smoothing tuned on test folds, (2) early stopping on the held-out bearing.