

PRODUCT DESCRIPTION


The RF-Linked Alarm Clock System is made up of one or more Receiver Units that wirelessly receive alarm trigger signals and produce audible alerts, and one Master Unit that keeps track of time and creates alarm events. Unless otherwise noted, all units are subject to the system specifications. The Master and Receiver units have different electrical, mechanical, and alarm specifications.



PRODUCT FEATURES

- Wireless RF-linked alarm triggering
- Long-range RF communication
- Low power consumption
- Audible alarm with high sound output
- Manual alarm trigger support
- Compact and portable design
- Plug-and-play operation
- Expandable to multiple receivers

SYSTEM BLOCK DIAGRAM

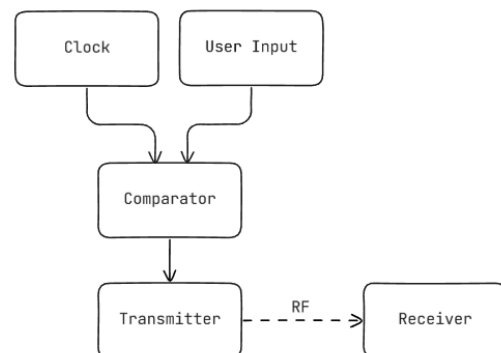

ORDERING INFORMATION

Model Number	Description
WS-001-TX	Transmitter
WS-002-RX	Receiver
WS-002-CLK	Clock Unit
WS-002-DAC	User Input Unit

SYSTEM SPECIFICATIONS

Parameters	Value
Operating Frequency	433MHz
Modulation type	OOK
RF Protocol	One way
Receiver Units	Unlimited
Communication range (outdoor)	100m
Operating Temperature	-15 to 85 °C

MASTER UNIT SPECIFICATIONS**Electrical Specifications**

Parameters	Value
Supply Voltage	5-12V
Current (idle)	300mA
Current (Active)	320mA

Timing Specifications

Parameters	Value
Clock Accuracy	250 PPM
Alarm Resolution	1Minute
Alarm Drift	± 22 seconds/day

User Interface

Component	Description
Buttons	Time set & Trigger
Display	Digital
Rotary Switch	Alarm Set
Indicators	LED (Power & Alarm)

Power Specifications

Parameters	Value
Source	9V Battery/ USB-A
Battery Type	Any
Battery Life	~2 months
Power Consumption	1.5W

RECEIVER UNIT SPECIFICATIONS

Electrical Specifications

Parameters	Value
Supply Voltage	5V
Current (idle)	70mA
Current (Active)	100mA
Receiver sensitivity	-110 dBm
Antenna type	Wire


Alarm Specifications

Parameters	Value
Alarm Frequency	1KHz
Sound Level	80-85 dB @ 1m
Alarm Duration	60 seconds (fixed)
Snooze Function	Yes

Power Specifications

Parameters	Value
Source	9V Battery
Battery Type	Any
Battery Life	~6 months
Power Consumption	0.3W

MECHANICAL INFORMATION

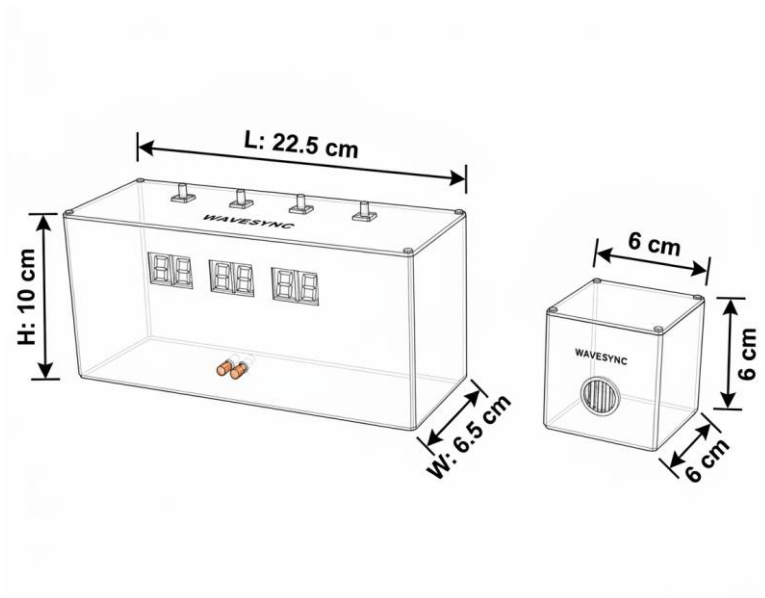

Dimensions shown are nominal in centimeters All tolerances are ± 1 cm except overall length ± 2 cm

	Master	Receiver
Weight	300g	100g

RELIABILITY & COMPLIANCE

Designed for continuous operation
RF interference tested
RoHS compliant
CE / FCC ready design

DISCLAIMER

This product is designed for consumer and educational use. Specifications are subject to change without notice. The manufacturer is not responsible for misuse or improper installation.

CONTACT INFORMATION

For the latest specifications, additional product information and information about IonSplice Engineering:

WEB: www.ionsplice.eng
Email: info-sales@ionsplice.com
Tel : +94 277 3922 444

For technical questions and application information:

Email: info-defence@ionsplice.com