

EE568 Project 3 - PM Motor Comparison Analysis

by Hakan Saraç - 2408086

1 Introduction

In this project, we will examined some stuff.

2 Question 1 - Magnetic Loading

2.1 Part - a

Flux path for one pole pair is provided in Figure 1 and the corresponding equivalent magnetic circuit is provided in Figure 2. In this part, the permeability of the rotor and stator are assumed to be infinite. Therefore, the reluctance of core material becomes zero. Another assumption can be made as that there is no fringing or leakage flux and flux lines are straight as shown in Figure 1 with green lines.

The machine parameters are as follows:

- Number Of Poles: 4
- Motor Axial Length: 100 mm
- Air Gap Clearance: 1 mm
- Magnet To Pole Pitch Ratio: 0.8
- Rotor Diameter: 100 mm
- Magnet Thickness: 4 mm
- Magnet Type: NdFeB N42 grade ($\mu_r=1.05$), radial shaped

With the assumptions made, the reluctance R_{m1} and R_{m2} in Figure 1 can be calculated as:

$$A_{pole} = \frac{\pi * D_i * L_{axial}}{P} = 0.007853 \text{ m}^2 \quad (1)$$

where P is the number of poles.

From the magnet to pole pitch ratio value of 0.8 (shown as K in (2)), the magnet area per pole can be calculated.

$$A_{magnetperpole} = A_{pole} * K = 0.006283 \text{ m}^2 \quad (2)$$

$$A_{nonmagnetperpole} = (1 - K) * A_{pole} = 0.00157 \text{ m}^2 \quad (3)$$

$$R_{m1} = R_{m2} = \frac{H_{magnet}}{A_{nonmagnetperpole} * \mu_0 * \mu_r} = 482480 \frac{1}{\text{Henry}} \quad (4)$$

$$R_{ag1} = R_{ag2} = \frac{H_{airgap}}{A_{magnetperpole} * \mu_0} = 126650 \frac{1}{\text{Henry}} \quad (5)$$

$$\mathcal{F}_{permagnet} = A_{magnetperpole} * B_{residual} * R_{m1} = 4001.61 \text{ Amperes} \quad (6)$$

Assuming that the core is infinitely permeable, loop equation of the equivalent circuit (see Fig.2) results in (7).

$$\phi_m = \frac{2 * \mathcal{F}_{permagnet}}{R_{m1} + R_{m2} + R_{ag1} + R_{ag2}} = 0.00657 \text{ Weber} \quad (7)$$

$$B_m = \frac{\phi_m}{A_{magnetperpole}} = 1.0455 \text{ Tesla} \quad (8)$$

From the values found in (8), the magnetic field strength value is provided in (9).

$$H_m = \frac{B_m - B_{residual}}{\mu_r * \mu_0} = -208004.48 \frac{A}{m} \quad (9)$$

As stated in [1], the coercivity value for a N42 NdFeB magnet is around $955 \frac{kA}{m}$

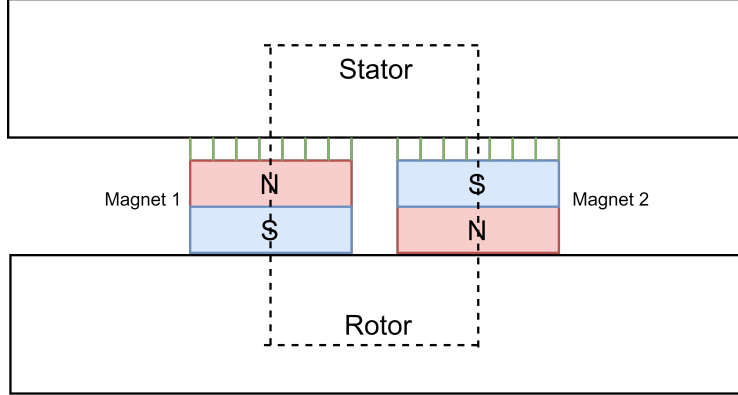


Figure 1: Flux Path Through a Pole Pair

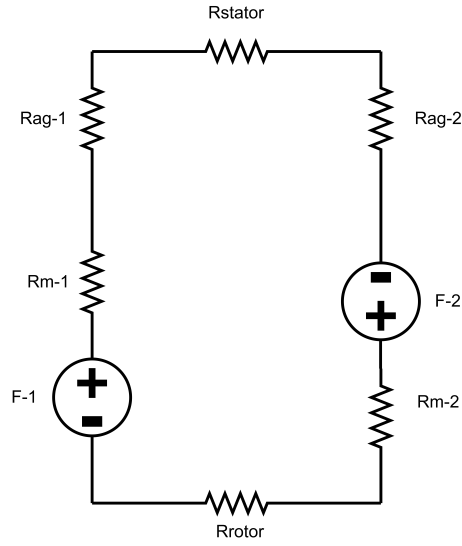


Figure 2: Magnetic Equivalent Circuit

References

- [1] e magnetsuk. Grades of Neodymium, 2020.

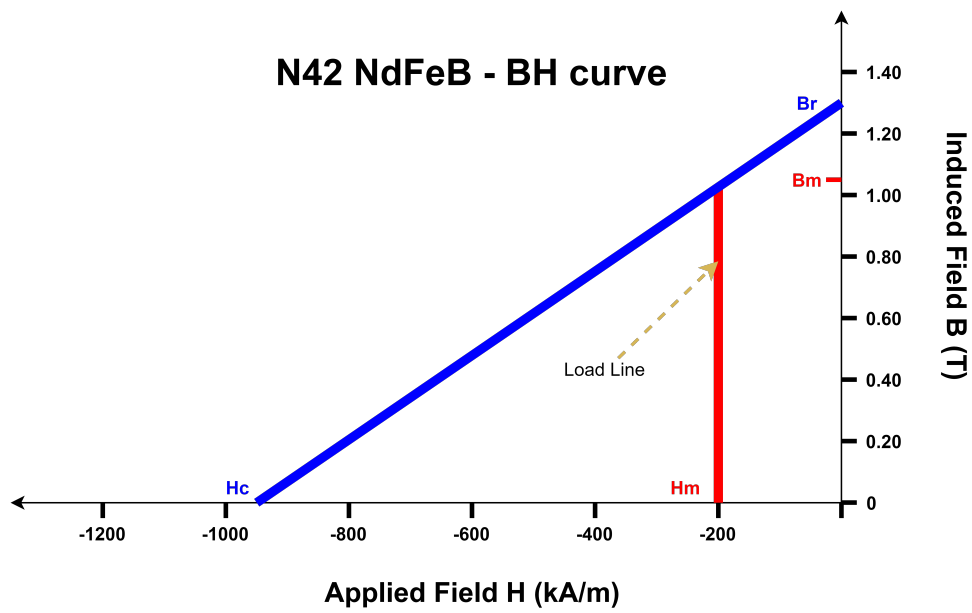


Figure 3: N42 NdFeB - BH curve with load line