FRONT VIEW (PROFILE, THROUGH THE PLATE) 2:1

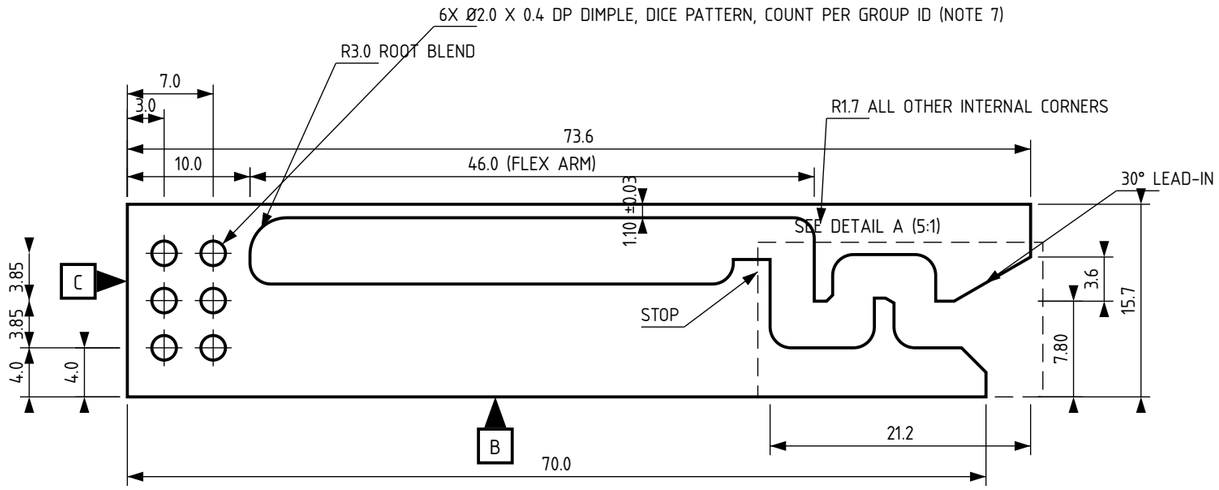

NOTES (UNLESS OTHERWISE SPECIFIED):

1. MATERIAL: 6061-T6 ALUMINUM, 1/2 IN PLATE OR 1/2 X 1-1/4 FLAT BAR. ALT: 7075-T6 (SEE 03_FEA).
2. UNITS MM. TOLERANCES: X.X ±0.1 X.XX ±0.05 ANGLES ±0.5°. ASME Y14.5-2018.
3. PLATE THICKNESS (12.7) IS STOCK, UNMACHINED, ±0.2. PLATE FACES = DATUM A. FLOOR BOTTOM = DATUM B.
4. THE PROFILE IS ONE 2.5D CUT THROUGH THE PLATE: ALL INTERNAL CORNERS R1.7 MIN (1/8 IN END MILL + 0.1) EXCEPT THE ARM ROOT BLEND R3.0. NO SAW, NO SECOND SETUP. WATERJET/LASER ACCEPTABLE ONLY IF THE 0.25 RIB HEIGHT, THE 1.10 ARM AND THE 7.80 PAD PLANE HOLD THEIR TOLERANCES THROUGH THE THICKNESS.
5. CARD-CONTACT EDGES (RIB TOP, BOTH PAD LANDS, NOTCH LIPS): BREAK 0.2-0.3, NO BURR. ALL OTHER EDGES 0.2-0.4.
6. ARM THICKNESS 1.10 ±0.03 OVER ITS FULL LENGTH: THIN-WALL, FINISH LAST, LIGHT PASSES. WITNESS LINES OK.
7. ID DIMPLES: DICE PATTERN, 1-6 PER PART PER GROUP ID (POSITIONS SHOWN FOR 6). SEE RFQ TABLE.
8. FINISH: TYPE II ANODIZE PER MIL-A-8625, COLOR PER RFQ TABLE. MASK NOTHING. ANODIZE AFTER DEBURR. RIB HEIGHT (0.25) MEASURED AFTER ANODIZE.
9. TAB WITNESS MARKS PERMITTED ON THE TOP EDGE AT X5 AND X60, 0.2 MAX PROUD, BLENDED.
10. FUNCTIONAL TEST (SAMPLE 10%): 1 CARD AND 24 CARDS (0.127 MM INDEX) PUSH ON BY HAND; GROUP STAYS IN WHEN LIFTED BY THE HANDLE AND SHAKEN. NO PERMANENT SET AFTER 30 CARDS X 20 CYCLES. NO CARD CREASE.
11. SOURCE MODEL: SAFT-V2-TAB_v2.step (FreeCAD 1.0). THE STEP GOVERNS UNDIMENSIONED GEOMETRY.

TOP VIEW (PLATE FACE, ID DIMPLES)
DIMPLES ARE ON THIS FACE (SEE FRONT VIEW)

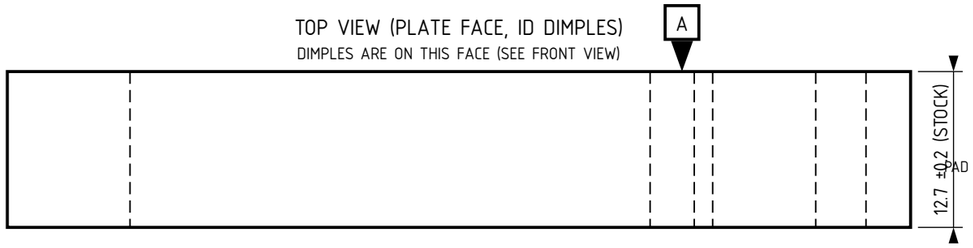

VIEW FROM THE MOUTH (+X)

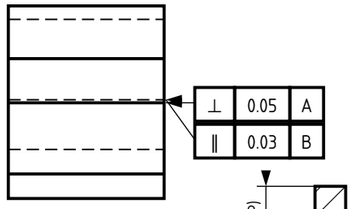

DETAIL A — WEAVE (5:1)

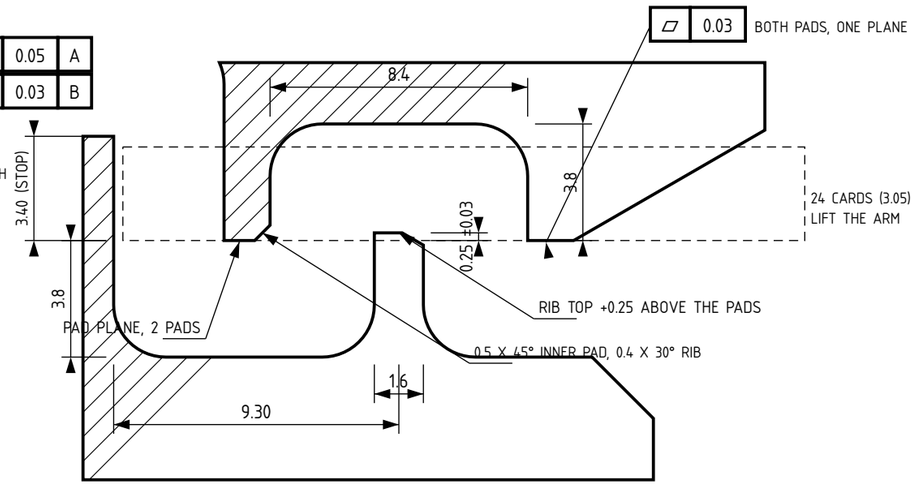

HALDO LABS · SYNAPTICON AUTOMATIC FACTORY TESTING V2		A3 2:1
TITLE CARD-STACK KEEPER, WEAVE FLEXURE	PART NO. SAFT-V2-TAB	REV v2 SHEET 1 OF 1
DRAWN: CLAUDE FABLE 5.1 (THE INSTRUMENT) 2026-10-22 CHECKED: J. GARMAN APPROVED: _____	MATL: 6061-T6 MASS: 26.8 g	FINISH: ANOD II UNITS: mm
THIRD ANGLE PROJECTION ASME Y14.5-2018 DO NOT SCALE DRAWING		