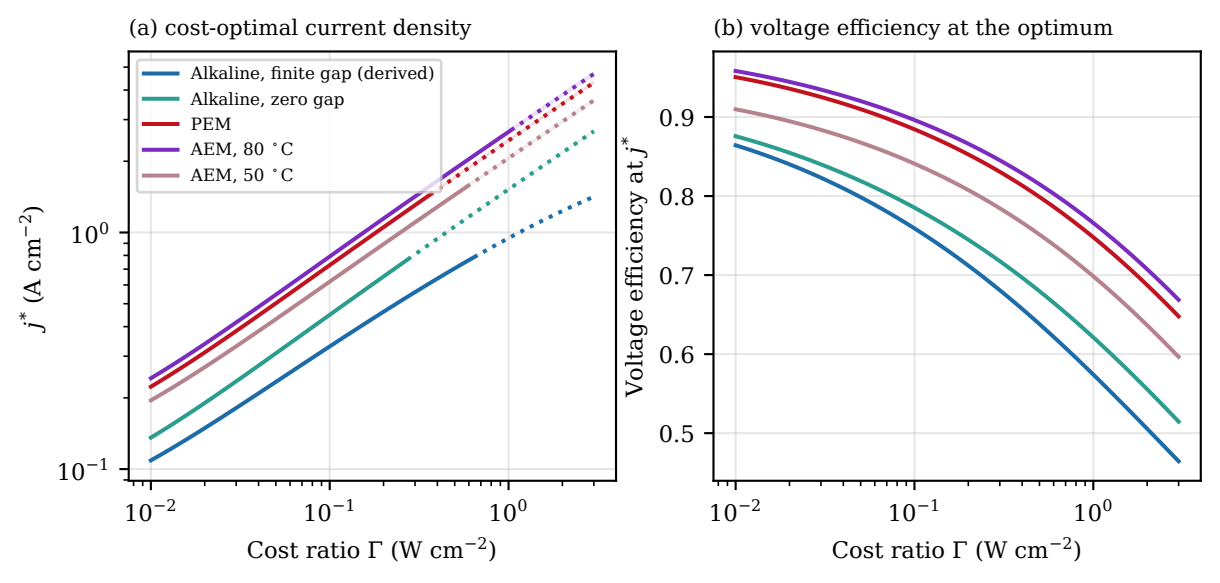
(a) cost-optimal current density
(b) voltage efficiency at the optimum
Alkaline, finite gap (derived)
Alkaline, zero gap
PEM
AEM, 80 °C
AEM, 50 °C
j^* (A cm^{-2})
Voltage efficiency at j^*
Cost ratio Γ (W cm^{-2})
Cost ratio Γ (W cm^{-2})
10^{-1}
10^{0}
10^{-2}
10^{-1}
10^{0}
0.5
0.6
0.7
0.8
0.9