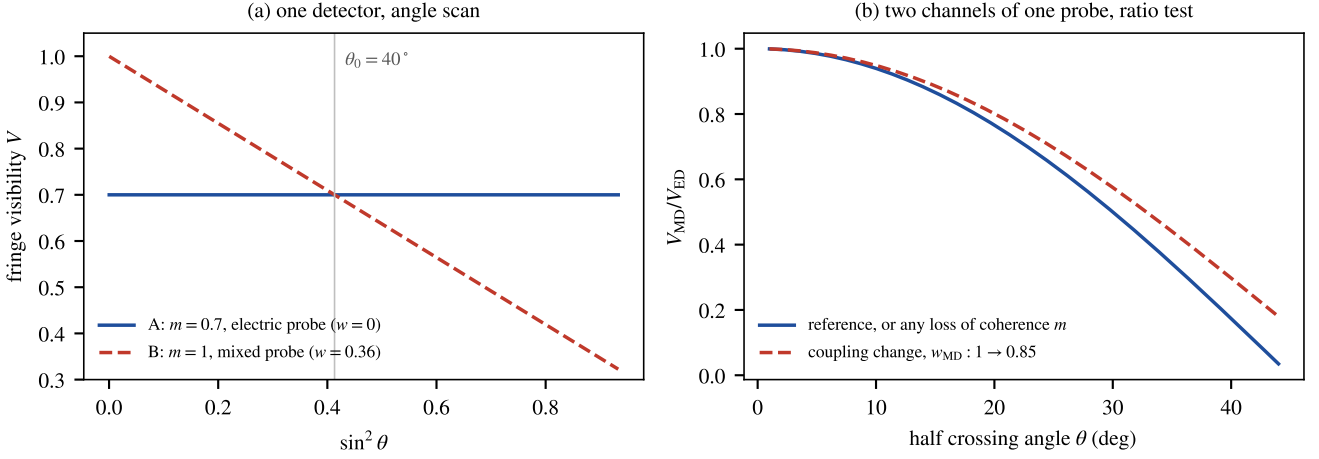
(a) one detector, angle scan
fringe visibility V
$\sin^2\theta$
$\theta_0 = 40^\circ$
A: $m = 0.7$, electric probe ($w = 0$)
B: $m = 1$, mixed probe ($w = 0.36$)
(b) two channels of one probe, ratio test
V_{MD}/V_{ED}
half crossing angle θ (deg)
reference, or any loss of coherence m
coupling change, $w_{MD} : 1 \to 0.85$