

Akzo Nobel 463-6-4; Aluminized Epoxy Primer

INGREDIENTS	CAS NO	%	8HR OEL
cyclohexanone	108-94-1	5-10	100 mg/m3
XYLENE	1330-20-7	10-25	350 mg/m3
METHYL ISOBUTYL KETONE	108-10-1	5-10	205 mg/m3
METHYL ETHYL KETONE	78-93-3	10-25	445 mg/m3




UN No: 1263
 Hazchem Code: •3YE
 DG Class: 3
 Subsidiary Risk: **Not Applicable**
 Packing Group: II
 Poisons Schedule: S5



NFPA Rating:

- ▶ 0: Minimum
- ▶ 1: Low
- ▶ 2: Moderate
- ▶ 3: High
- ▶ 4: Extreme

HEALTH HAZARD INFORMATION

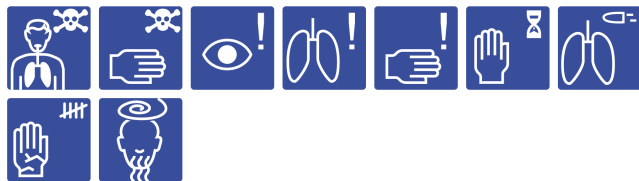

Acute Health Effects:

Harmful by inhalation.
 Harmful in contact with skin.
 Irritating to eyes.
 Irritating to respiratory system.
 Irritating to skin.
 May cause SENSITISATION by skin contact.
 HARMFUL-May cause lung damage if swallowed.
 Vapours may cause drowsiness and dizziness.

Chronic Health Effects:

May cause CANCER.
 Possible risk of harm to the unborn child.
 Repeated exposure may cause skin dryness and cracking.

* – limited evidence

PROPERTIES



Liquid. Does not mix with water. Sinks in water. Highly flammable.

EMERGENCY



FIRST AID

Swallowed:

Give water (if conscious). URGENT MEDICAL ATTENTION.

Eye:

Wash with running water.

Skin:

Remove contaminated clothing. Wash with soap & water.

Inhaled:

Fresh air. Rest, keep warm. If breath shallow, give oxygen. Medical attention.

Advice To Doctor:

Evaluate for respiratory distress. Consider lavage with cuffed tube. NO adrenalin.

Fire Fighting:

Keep containers cool. Foam. Dry agent. Do NOT fight fire with BCF extinguisher. Do NOT fight fire with water.

Spills and Disposal:

Eliminate ignition sources. Consider evacuation. Prevent from entering drains. Contain spillage by any means. Absorb with dry agent. Stop leak if safe to do so. Use only in well ventilated areas. Not recommended for interior use on large surface areas. Take precautionary measures against static discharges. Dispose of this material and its container at hazardous or special waste collection point. This material and its container must be disposed of in a safe way. To clean the floor and all objects contaminated by this material, use water and detergent.

PRECAUTIONS FOR USE



Appropriate engineering controls:

Local Exhaust Ventilation recommended.

Glasses:

Consider chemical goggles.

Gloves:

1.VITON/CHLOROBUTYL 2.VITON

Respirator:

Type A Filter of sufficient capacity. (AS/NZS 1716 & 1715, EN 143:2000 & 149:2001, ANSI Z88 or national equivalent)

Storage and Transportation:

Store in cool, dry, protected area. Restrictions on Storage apply. Refer to Full Report. Use only in well ventilated areas. Not recommended for interior use on large surface areas. Take precautionary measures against static discharges. Dispose of this material and its container at hazardous or special waste collection point. Keep out of reach of children. Keep container in a well ventilated place. Keep away from food, drink and animal feeding stuffs. Keep away from sources of ignition. No smoking.

HIGHLY FLAMMABLE. Toxic smoke/fumes in a fire. Use only in well ventilated areas. Not

SAFE STORAGE WITH OTHER CLASSIFIED CHEMICALS



Flammable Explosive Toxic Radioactive Oxidizing Harmful

+

x

x

x

x

+

x — Must not be stored together