

PPG Ind PR1425 B1/2 Part A

INGREDIENTS	CAS NO	%	8HR OEL
N,N-dimethylacetamide	127-19-5	10-30	36 mg/m3
sodium dichromate	10588-01-9	10-30	0.05 mg/m3
calcium dichromate	14307-33-6	0-10	0.05 mg/m3
kaolin	1332-58-7	0-10	10 mg/m3

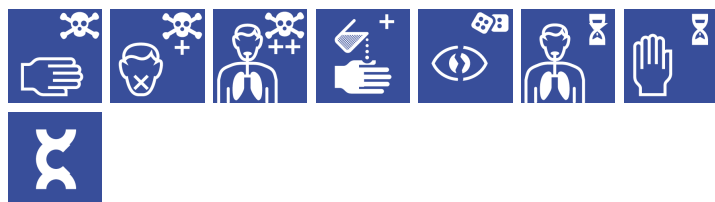


UN No: **3082**
 Hazchem Code: **•3Z**
 DG Class: **9**
 Subsidiary Risk: **Not Applicable**
 Packing Group: **III**
 Poisons Schedule: **S6**

**NFPA Rating:**

- ▶ **0:** Minimum
- ▶ **1:** Low
- ▶ **2:** Moderate
- ▶ **3:** High
- ▶ **4:** Extreme

HEALTH HAZARD INFORMATION

**Acute Health Effects:**

Harmful in contact with skin.
 Toxic if swallowed.
 Very toxic by inhalation.
 Causes burns.
 Risk of serious damage to eyes.
 May cause SENSITISATION by inhalation.
 May cause SENSITISATION by skin contact.

Chronic Health Effects:

May cause CANCER.
 May cause heritable genetic damage.
 Toxic: danger of serious damage to health by prolonged exposure through inhalation.
 May impair fertility.
 May cause harm to the unborn child.

* – *limited evidence*

PROPERTIES



Liquid.
 Does not mix with water.
 Sinks in water. Does not burn.

EMERGENCY



FIRST AID

- Swallowed:** Give water (if conscious). URGENT MEDICAL ATTENTION.
- Eye:** Wash with running water (15 mins). Medical attention.
- Skin:** Flood body with water. Remove contaminated clothing. Wash with water.
- Inhaled:** Fresh air. Rest, keep warm. If breath shallows, oxygen. Medical attention.
- Advice To Doctor:** Treat symptomatically. Ipecac emesis. Chrome ulcers respond to CaNa2EDTA.
- Fire Fighting:** Keep containers cool. Keep surrounding area cool. Water spray/fog. Spilled liquid has low boiling temperature and evaporates quickly. Pollutant. Prevent from entering drains. Contain spillage by any means.
- Spills and Disposal:** Control vapour with water spray/ fog. Absorb with dry agent. Stop leak if safe to do so. This material and its container must be disposed in a safe way. To clean the floor and all objects contaminated with material, use water and detergent.

PRECAUTIONS FOR USE

**Appropriate engineering controls:**

Local Exhaust Ventilation recommended.

Glasses:

Consider full face-shield.

Gloves:

1.BUTYL 2.SARANEX-23 3.PVA

Respirator:

Type A Filter of sufficient capacity. (AS/NZS 1716 & 1715, EN 143:2000 & 149:2001, ANSI Z88 or national equivalent)

Storage and Transportation:

Store in cool, dry, protected area.
 Restrictions on Storage apply. Refer to Full Report.
 Keep locked up.
 Keep out of reach of children.
 Keep away from living quarters.
 Keep away from food, drink and animal feeding stuffs.
 Vapours/gas heavier than air.

SAFE STORAGE WITH OTHER CLASSIFIED CHEMICALS



Flammable x Explosive x Radioactive x Oxidizing x

Fire/Explosion

Toxic smoke/fumes in a fire.

Hazard:

In case of fire and/or explosion, DO NOT BREATHE FUMES.

x — *Must not be stored together*

For further information call Environmental Protection: 880-9714 (DH) or 427-1535 (JID). For proper disposal methods and locations for the chemical contaminated material, contact the Environmental Engineering Division on 880-9754