
DELFIco-GENERAL TRADING -LLC



DELFIco-GENERAL -TRAIDING-LLC

License :N° 824045

PO-BOX : 35121

DUBAI


Adress : AL- Garhoud RED- CRESCENT- AUTHORITY – Building Office 306

Adress mail :delfico-international@delficointernational.com

GSM : 00 33 6 58 48 29 58 / 00 971 50 150 1429

RIG SA 04

**2010 Falcon Rig Model DR-1000
Mechanical Rotary Drilling Unit**

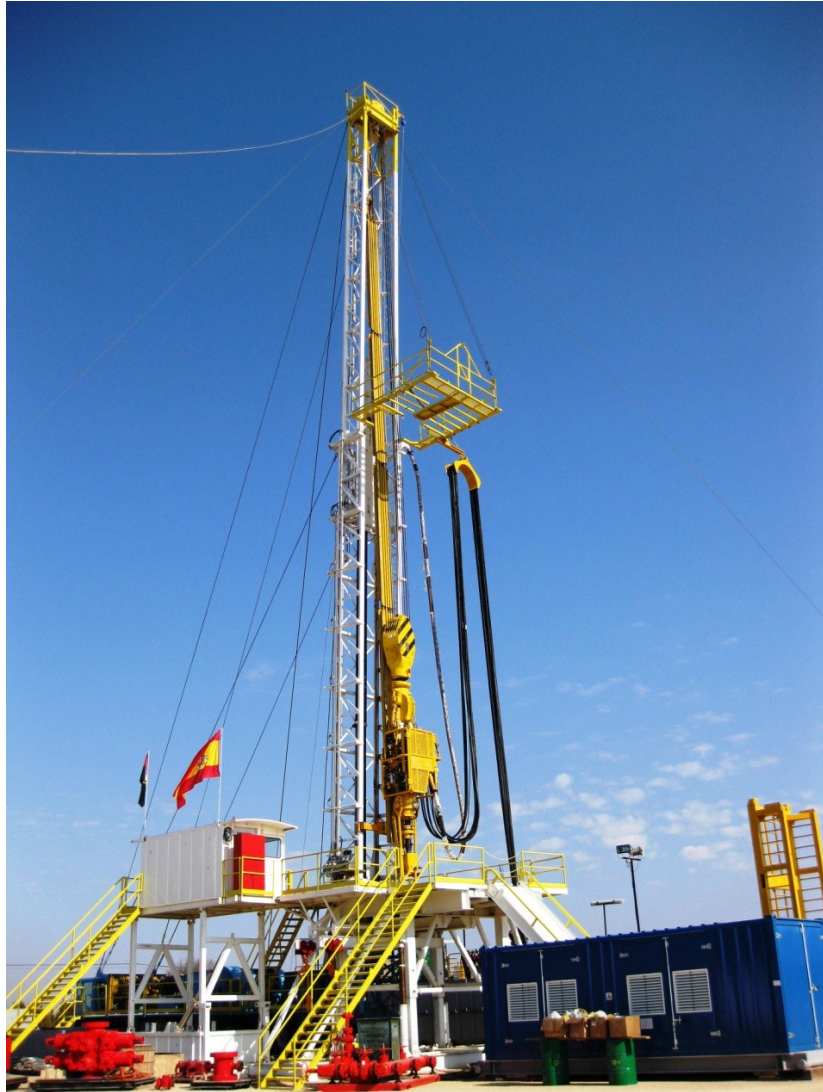

RIG TECHNICAL SPECIFICATIONS

1. DRAWWORK: DR-1000 SINGLE DRUM

1.1 TUBING DRUM

Barrel	18.00" Dia. X 38" Wide
Drum Shaft	8" OD
Brake Flanges	42" X 12" Hardened Overlay
Drum Clutch	Wichita 230 Full Air
Drum Brakes	Conventional Linkage System
Brake Cooling	Water circulated
Drum Speeds	6 Forward, 1 Reverse
Drum Chain	160 -2
Wireline Size	1 1/8"
Drum Grooving	Lebus 1 1/8"

1.2 SANDLINE DRUM

N/A

1.3 DRAWWORKS FRAME

Fabricated mild steel with 5/8 in. side plates, bolt on sealed case for oil bath chain lubrication, outboard mounted clutch on both Tubing drum, with bolt on covers. Lubrication points are located outside of draw works frame for ease of maintenance.

1.4 DRUM

Fabricated from 1 ¼ in. plate, the end plates of Tubing drum are reinforced with welded gussets to insure maximum strength and durability.

1.5 BRAKE SYSTEM

Tubing drum system unitized conventional adjustable linkage systems, with woven and molded brake blocks. Drum has water circulated flanges for cooling.

1.6 CHAIN DRIVES

All chains are fully enclosed for oil bath lubrication insuring longer life and cleaner operation.

1.7 RIGHT ANGLE GEARBOX

Fabricated 1,000 Horsepower Input Driven with 1810 Series Drive Line, Direct output to drive sprocket, Oil bath lubricated, and mounted to carrier frame.

1.8 AUXILIARY BRAKE

One (1) Kobelt 60" water cooled disc brake with single caliper mounted on Tubing Drum with control at operator's platform. Guard is fabricated with expanded metal for maximum cooling and safety.

1.9 OPERATOR CONTROLS

Controls for the operator are located behind the drawworks frame at the mast base and can be hydraulically raised for optimal visibility and include engine start, emergency stop, gear selector, clutch and throttle valve, brake handle, auxiliary brake control and winch control. .

1.10 COMPOUND

Fabricated and designed for 1000 HP input manufactured by Cotta Manufacturing. Compound has gear driven input and output shafts with pressurized lubrication and oil cooler.

1.11 ROTARY DRIVE

Torque tube rotary drive to rear of carrier with Wichita Model 3-14 friction clutch installed in the system. Complete with 1810 series torque tubes.

2. ENGINE AND TRANSMISSION

2.1 POWER SOURCE

Two (2) D-3408 DITA Engines Rated 515 Horsepower each at 2100 RPM complete with radiator, hydraulic power steering pump, remote transmission oil cooler, 12 volt alternator, 12 volt electric starter, air inlet safety shut-off assembly, 28 CFM air compressor, air governor assembly, dry type air cleaner, spark arrestor muffler exhaust system, safety shutdown for low oil pressure, engine brake, and high coolant temperature.

2.2 TRANSMISSION

Two (2) Allison Model 6061 transmissions which provide six (6) forward speeds and one (1) reverse.



3. RIG CARRIER

3.1 CARRIER

Falcon Rigs, Inc. Heavy-Duty I-Beam off-highway carrier with tridem three (3) front steering axles, tandem (2) rear drive axles and two (2) tag axles.

3.2 CARRIER FRAME

Fabricated from 24" X 84# wide flange I-Beam with cross members for maximum strength. 3/16 in. diamond tread steel decking is used on frame for strength and safety. Front and rear tow bars mounted to frame for towing operations.

3.3 FRONT AXLES

Three (3) Eaton, 24,000# per axle, front steering axles with Rayco suspension. Six (6) 445/65R22.5 Tires mounted on 22.5 "Bud" type steel wheels.

3.4 REAR AXLES

Two (2) Eaton Tandem rear drive axles rated at 60,000# with Hendrickson walking beam suspension, Eight (8) 11:00 R22.5 tires mounted on 22.5 "Bud" type steel wheels.

3.5 TAG AXLE

Two (2) Silent drive non-drives, tag axles mounted behind tandem drivers, with air lift and retract, rated at 20,000#. Four (4) 11:00 R22.5 tires Mounted on "Bud" type steel wheels. Air control mounted in box on carrier deck.

3.6 BRAKE SYSTEM

Drum Brakes on all axles and is equipped with DOT approved system. Carrier is equipped with parking and maxi brakes.

3.7 STEERING SYSTEM

Hydraulic assist system powered by engine driven pump.



3.8 CAB

One-Man Cab mounted for left hand drive, equipped with air ride adjustable seat, cab heater, air horn, windshield wiper, west coast mirrors, step and grab handle for entry and exit and instrument panel.

3.9 HYDRAULIC LEVELING JACKS

Six (6) Jacks installed, Two (2) at front of carrier and two (2) rear jacks and two (2) mid carrier jacks all equipped with lock nuts and stands.

3.10 FUEL TANK

Two (2) 150 Gallon Aluminum Tanks mounted under carrier deck.

3.11 HYDRAULIC WINCH

Two (2) Braden Model PD-12-C 12,000# first layer capacity mounted on carrier deck with controls mounted at operator's console.

3.12 WALKWAYS AND HANDRAILS

Folding 28" wide Grip-strut walkways extending from transmission position to operator's position on operator's side of carrier and off operator's side with fabricated handrails, and one (1) ladder from ground to carrier deck each side.

3.13 OTHER

Two (2) sets built-in steps, one on each side near engine.

Two (2) internal load guy line binders mounted on carrier deck

Stainless steel tubing used on pneumatic and hydraulic lines on carrier.

Dual headlights on each side of carrier and NHTSA Code running lights on carrier.

4. CARRIER AIR, HYDRAULIC AND ELECTRICAL SYSTEM

4.1 AIR SYSTEM

28 CFM Air Compressor, Engine Driven, AD-9 Air Dryer, Air Supply Tanks, Stainless Steel Piping, Hoses and control valves.

4.2 HYDRAULIC SYSTEM


Two (2) P-37 51 GPM PTO Driven Hydraulic Pump, 400 Gallon Tank complete with filtering system, stainless steel lines, hoses and control valves.

Third (3rd) hydraulic pump system with 100HP explosion proof electric motor, a variable frequency drive, 51 gallon/minute hydraulic pump, installed in parallel with existing hydraulic system.

4.3 ELECTRICAL SYSTEM

Four (4) 12V High Cranking Amp Batteries mounted in steel box providing 12V system, for carrier and electric control system.

5. TELESCOPING MAST

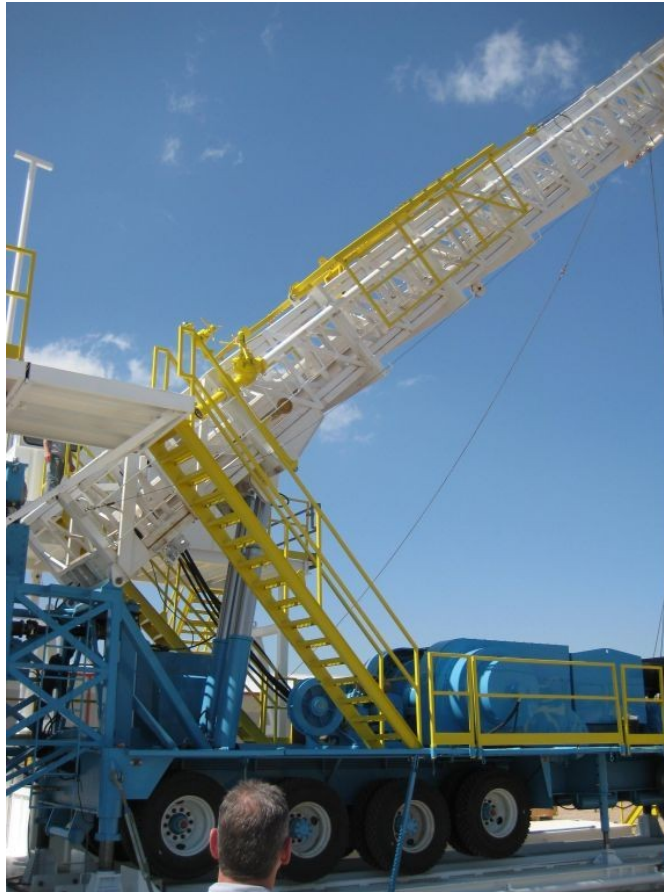

5.1 MAST CONSTRUCTION

Falcon Rigs, Inc. open face mast professionally engineered design meets or exceeds API Spec 4F. All materials are properly sized and traceability is recorded with permanent records kept on site. All mast are inspected by an independent inspection company. Integral ladder from carrier deck to crown.

5.2 MAST SPECIFICATIONS

Mast Height	120'
Capacity (10-Lines)	440,000 lbs. Nominal Gross Hook
Load Capacity	

Mast is constructed using rectangular tubing in main legs of upper, lower, and base sections and incorporating "C" braces. Mast base is stationary and tilt adjustment is achieved with adjusting screws in the well side mast legs.

5.3 CROWN ASSEMBLY

Fabricated I-Beam Complete with Crosby Steel Sheave Cluster Grooved for 1 1/8" Wire Line.

Fall assist post mounted in crown, Handrail mounted for walk around.

Automatic folding Tubing Board with fingers and diving board.

Two (2) 3-Stages, double acting, raising cylinders insure smooth raising and lowering of mast.

5.6 GUYLINES

Four (4) internal load guy lines are furnished from crown to carrier. External wind and board guylines are furnished.

5.7 LOCKING SYSTEM

Latch System is automatically engaged when in proper position and is manually retracted

5.8 DATA PLATES

Mast rig-up and load data plates are mounted on mast base and are easily to read and followed.

5.9 RIG SAVER

Crown-O-Matic rig saver installed on Mast and Drawworks with Controls.



5.10 HYDRAULIC CATWORKS (easy torque)

Two (2) Hydraulic Cylinders 8' OD x 96" long mounted in mast for pipe breakout and make-up operations. Complete with piping, hoses, and controls.

5.11 STANDPIPE

4" OD x 40' long 5,000# working pressure with 160 degree gooseneck on top with weld ends on bottom and top.

6. SUBSTRUCTURE

Falcon 18' hydraulic telescoping substructure has a floor height of 18', a width of 10'-4", a length of 39'-9" and a collapsed height of 10'. The substructure work floor is 15'-4" x 20' and designed to accommodate a 27-1/2" rotary table.

The substructure is designed for an API rating of 420,000 lb. Rotary Load and a 260,000 lb. Setback Load, with a simultaneous rating of 680,000 lbs.

Complete with two (2) tong back-up post, oak boards on floor in racking area, two (2) sets stairs from the substructure floor to the carrier deck, and one (1) set stairs from the substructure floor to the ground.



LOAD BEAM: 5' 6" wide x 12" high x 40' long plated top and bottom with pin connections for attaching to substructure.

MUDBOAT with folding ramps 9' 6" wide x 12" high x 49' long plated top and bottom with tire guide and stops for spotting rig. Pinning connections for attaching to load beam.

CHAIN DRIVE SYSTEM Elevated type system for rotary table operations using rig rotary drive. Rotary torque system installed in elevated chain drive case complete with torque gauge.

CATWALK: 5' wide x 42" high x 50' long, two (2) pieces with 1/2" plate on top with steps on one end.

DOGHOUSE: 14' long x 8' wide x 8' high with two (2) doors, knowledge box, bench with lid. Mounted on 8'6" wide x 40' long x 12" high skid complete with diamond plate on top, 8' wide x 20' long x 3' high tool box built on skid under doghouse and area for mounting closing unit on other end of skid. Doghouse raise with (1) one hydraulic cylinder and powered with rig hydraulics and elevate to substructure floor level.

RIG LIGHTING system including eleven (11) 4' fluorescent fixtures and red beacons for crown. Wiring in hard conduit and explosion proof fixtures used.

7. MUD SYSTEM

7.1. MUD PUMP

Two (2) F-1000 HP (EMSCO TYPE) triplex mud pump packages complete with two (2) MCM 250 centrifugal charging pump, 6x8x14 driven by 40 HP electrical motor and two (2) PX-200 lubricating Wilden air pump.

The mud pumps are powered w/ two (2) **D-399B PCTA CAT.** industrial power with two (2) new C-300-100 National torque converter assy's mounted w/air clutch on two (2) heavy duty 3-runner 18" I-beam oilfield master skids.



Engine HP rating: 1.000 HP @ 1.200 rpm.

Both units are equipped with hydra-mechanical safety shut down (H.S.M.O.)

7.2. MUD TANKS

Three (3) tanks 1400 bbl mud system. All tanks (50' x 10' x 8') on a three runner oil field type skid with loading hitches on both ends for tail boarding.

Tanks has internal ladders to each compartment, equipment supports, fold down type handrails and covered with galvanizes bar grating.



Mud system consists of the following:



SHAKER TANK (TANK#1) 440 bbl capacity with (5) compartment:

1. - Trip tank 38bbl capacity
2. - Shale pit 75bbl capacity with M-I Swaco Mongoose PT Dual Motion Adjustable Shaker.



3. - Desander pit 88bbl capacity with Derrick desander Model DSV-10-2.



4. - Desilter pit 89bbl capacity with Derrick 4" hydrocyclone, Model S-412-S



5. - Degasser pit 150bbl capacity with Derrick Vacu-Flo 1200 degasser.
6. - Porch with three (3) Centrifugal pump. (2) MCM 250 Centrifugal pump, 6 x 8 x 14, driven by 100 HP electrical motor for desander & desilter and one (1) MCM 250 Centrifugal pump, 3 x 4 x 12 driven by 25 HP electrical motor.



SUCTION TANK (ACTIVE -TANK#2) 522bbl capacity with (3) compartment:

1. - Two (2) Suction active compartment 419bbl capacity with four (4) O 'Drill MCM agitators Model MA-10, driven by 10 HP electrical motor and Nord gearbox.
2. - One (1) Slug tank 103bbl capacity with one (1) O 'Drill MCM agitators Model MA-10, driven by 10 HP electrical motor and Nord gearbox.
3. - Porch with two (2) MCM 250 Centrifugal pump, 6 x 8 x 14, driven by 75 HP electrical motor for mixing and two (2) Derrick 6 in mud mixing hopper. One MCM 250 Centrifugal pump, 6 x 8 x 14, driven by 75 HP electrical motor for degasser.



RESERVE TANK (TANK#3) 441bbl capacity with (3) compartment

1. - Three (3) reserve compartment 147bbl/each capacity
2. - One (1) MCM 250 Centrifugal pump, 6 x 8 x 14, driven by 75 HP electrical motor for transfer drilling mud.



7.3. POOR BOY DEGASSER

48" Poor Boy Degasser (gas-buster) closed bottom type, installed on load beam, 6 in mud inlet, and 8 in gas vent line.



8. WELL CONTROL EQUIPMENT:

8.1. RAM BOP

One (1) **13-5/8" – 5,000 PSI double ram BOP**, Shaffer SL style, flanged top and bottom connection, BX160 ring groove, w/two side outlets 3-1/8" x 5000 PSI.
Rams: 2-3/8", 2-7/8", 3-1/2", 4-1/2", 7", 9-5/8", Variable ram, Blind Ram

Drilling spool 13-5/8" x 5.000 psi x 762 mm (high) with 2 lateral outlets 3-1/8"x5000psi.


Drilling spacer 13-5/8" x 5.000 psi x 1200 mm (high)

Double studded adapter flange 13-5/8" x 11" x 5.000 psi

8.2. ANULAR BOP

One (1) **13-5/8" – 5.000 PSI annular BOP**, Shaffer bolted-cover spherical style, top studded connection and bottom flanged connection, BX160 ring groove.

BOP'S STACK-UP

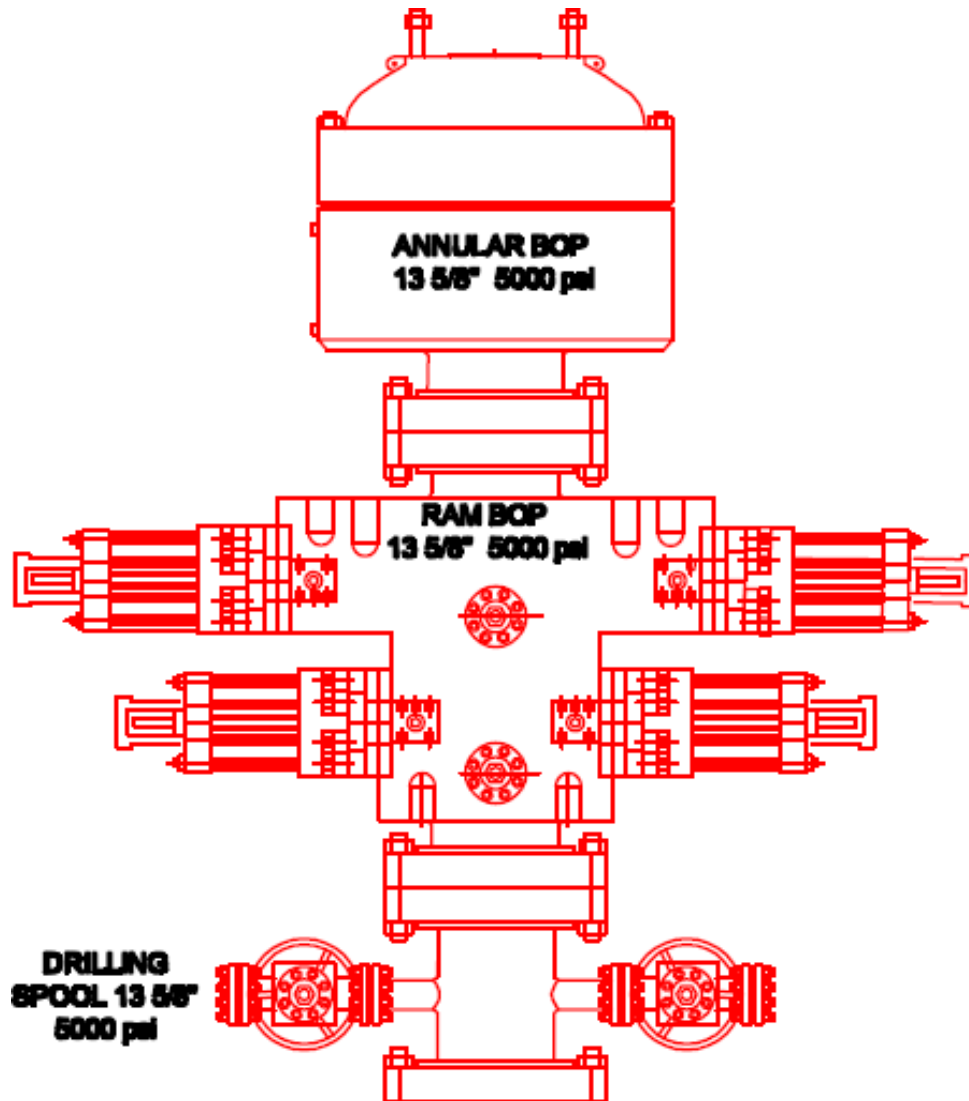

8.3. DIVERTER SYSTEM

One (1) 21-1/4" x 2000psi MSP Diverter (Hydrill Type)



One (1) Diverter Spool 21-1/4" x 2000psi with two(2) lateral outlets 8" x 2000psi

One (1) Double studded adapter flange 20-3/4" x 3000psi- 21-1/4" x 2.000 psi


One (1) Spacer 21-1/4" x 2000psi x 1250mm (high)

Two (2) 8" x 2000psi manual ball valve, full open

Two (2) 8" x 2000psi hydraulic ball valve, full open

Two (2) 8"x2000psi vent line, with 8"hammer union connection fig.206

DIVERTER STACK-UP

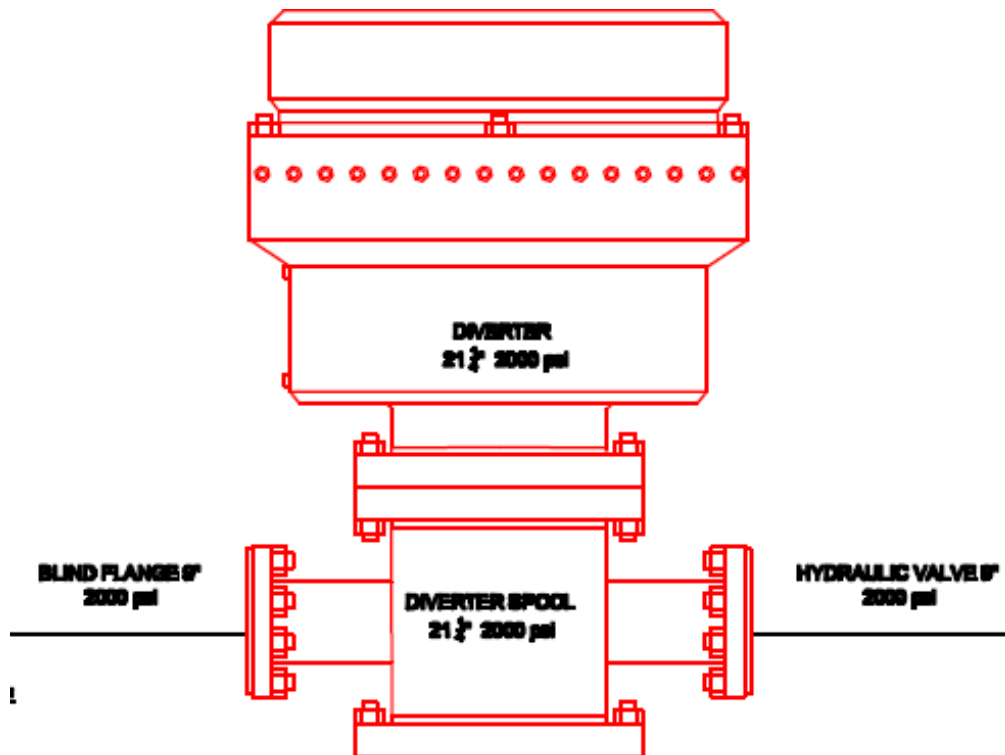

8.4. KILL AND CHOKE LINE

Choke line equipped with one (1) manual operated gate valve, 3-1/8" x 5.000psi and one (1) hydraulically actuated gate valve.

Kill line equipped with two manual gate valves 2-1/16" x 5.000psi H₂S and one (1) MS check valve 2-1/16" x 5.000psi H₂S resistant.

8.5. CHOKE MANIFOLD

Choke Manifold 3-1/8" – 5.000 PSI, type H₂S with Super Choke 10.000 PSI and console complete.



8.6. ACCUMULATOR UNIT

One (1) FKQ800-7 Seven Station BOP Control Unit System API Spec 16D.

Twenty (20) accumulator bottles, 10 gallon each, System nominal pressure: 3000Psi, One (1) 475 gallon fluid reservoir.

Remote Control Panel, Driller's Panel & Auxiliary Driller's Panel,

Power supply: 490V □ } 19V, 60Hz

Displacement of Electric Pump: 21 gallon/min

Displacement of Pneumatic Pump: 60×2ml/stroke

Three ways alarm system: low pressure of accumulator (<17MPa), low pressure of Air supply (<0.3MPa) and low liquid level (<200).



9. RIG FLOOR EQUIPMENT & HANDLING TOOLS

9.1. MANUAL ROTARY TONGS

AOT Manual type DB tong from 3-1/2" to 17" with several sets of jaws

9.2. PNEUMATIC TONG

VARCO spinning wrench Model SSW-40 range 3-1/2" to 9-1/2"

9.3. KELLY SPINNER

Kelly spinner, air, JT Oilfield (Varco 6600 type), connections 6-5/8" API REG LH box.

Kelly spinner, air, Gill Services, reversing for right and left hand rotation, 65 RPM, 130 GPM, 100 psi

9.4. POWER SWIVEL

Mud King Power Swivel, Model SW-200, MSLR 200ton, MWP 5000psi, Max Speed 300 r/min.

9.5. ELEVATOR LINKS

Two (2) pair of Links 108" & 96" 250 tons

9.6. D.P & D.C MANUAL SLIPS

Varco 5" SDML slip with 4-1/2" inserts

Varco 5" SDML slip with 5" inserts

Varco 3-1/2" SDML slip with 2-7/8" inserts

Varco 3-1/2" SDML slip with 3-1/2" inserts

Varco 4-1/2" - 6" DCS-R drill collar slip

Varco 5-1/2" - 7" DCS-R drill collar slip complete

Varco 8" - 9-1/2" DCS-L drill collar slip

9.7. SAFETY CLAMPS

AOT safety clamp, Access model T, range O.D. size 3-1/2" to 4-1/2"

AOT safety clamp, Access model A-MP-R, range O.D. size 9-1/2" to 10-1/2"

9.8. ELEVATORS

Varco elevators 4-1/2" 250 tons, type MGG-CL

Varco elevators 3-1/2" 150 tons, type RGG-CL

YT series slip type elevator 2-3/8", 2-7/8", 3-1/2" x 75 tons

Varco side door elevator 2-7/8" x 75 tons

10. DRILL STEM

10.1. DP & DC & HWDP & PUP JOINTS

(325) joints D.P. 4-1/2" 16,60 lb/ft Grade S-135 / EU, Range 2, Conn NC50. Tool Joint 6-3/8" OD x 3-1/2" ID, hard banding and internal plastic coated.

(48) joints D.P. 3-1/2" 13,30 lb/ft Grade S-135 / EU, Range 2, Conn NC38 IF. Tool Joint 5" OD x 2-7/16" ID, hard banding and internal plastic coated.

(18) Joints HWDP 5", Conn NC50, Tool Joint 6-1/2" OD x 3-1/8" ID.

(18) Joints D.C. 4-3/4" spiral, Conn 3-1/2"

(15) Joints D.C. 6-1/2" spiral, Conn 4-1/2"

(12) Joints D.C. 8-1/2" spiral, Conn 6-5/8"

(2) Pup Joint 4-1/2" x 3 meters

(2) Pup Joint 4-1/2" x 6 meters

(8) Pipe basket for tubular goods transport.



10.2. LIFTING SUB'S

- (5) Lifting sub 6-5/8" REG PIN for 18 deg taper elevator 4-1/2" 250 tons
- (2) Lifting sub 7-5/8" REG PIN for 18 deg taper elevator 4-1/2" 250 tons
- (8) Lifting sub 4-1/2" IF PIN for 18 deg taper elevator 4-1/2" 250 tons
- (11) Lifting sub 3-1/2" IF PIN for 18 deg taper elevator 3-1/2" 150 tons
- (2) Cast steel lifting protector 6-5/8" REG PIN
- (2) Cast steel lifting protector 6-5/8" REG BOX
- (2) Cast steel lifting protector 4-1/2" IF PIN
- (2) Cast steel lifting protector 4-1/2" IF BOX
- (2) Cast steel lifting protector 3-1/2" IF PIN
- (2) Cast steel lifting protector 3-1/2" IF BOX

10.3. BIT SUB'S

- (2) Bit sub 9" OD X 3" ID, Conn. 7-5/8 REG. BOX with seat for float valve x 7-5/8 REG. BOX
- (1) Bit sub OD 9-1/2" x ID 3" Conn. 7-5/8 REG BOX with seat for float valve x 6-5/8" REG BOX
- (2) Bit sub OD 8-1/4" x ID 2-13/16" Conn. 6-5/8 REG BOX with seat for float valve x 6-5/8" REG BOX
- (1) Bit sub OD 7" x ID 2-13/16, Conn. 4-1/2 REG BOX with seat for float valve x 4-1/2" IF BOX
- (1) Bit sub OD 4-3/4" x ID 1-3/4" Conn. 3-1/2 REG BOX With seat for float valve x 3-1/2" IF BOX
- (1) Bit sub OD 6-1/2" x ID 2-13/16" Conn. 4-1/2" IF BOX x 4-1/2" IF BOX
- (1) Bit sub 4-3/4" OD x 2-1/4", Conn. 3-1/2" IF BOX x 3-1/2" IF BOX

10.4. X-OVER'S

- (2) X-over 9" OD X 3" ID, Conn. 7-5/8" REG. PIN X 6-5/8" REG. BOX
- (2) X-Over OD 8-1/4" X ID 2-13/16" Conn. 6-5/8" REG PIN X 4-1/2" IF BOX
- (2) X-Over OD 6-1/2" ID 2-13/16" Conn. 3-1/2" IF PIN X 4-1/2" IF BOX
- (4) X-Over OD 6-1/2" X ID 2-7/8" Conn. 4-1/2" IF PIN X 4-1/2" IF BOX
- (2) X-Over OD 4-3/4" X ID 2-7/16", Conn. 3-1/2" IF PIN X 3-1/2" IF BOX
- (2) X-Over OD 6-1/2" X ID 2-3/4", Conn. 4-1/2" IF PIN X 3-1/2" IF BOX
- (1) X-Over, 3-1/2" IF BOX X 2-7/8" EUE PIN
- (1) X-Over, 3-1/2" IF BOX X 2-3/8" EUE PIN

10.5. KELLY'S & SAVER SUB'S, UPPER & LOWER KELLY VALVE

- Two (2) Kelly saver sub, 6-1/2" OD X 2-13/16" ID 4-1/2" IF PIN X BOX
- Two (2) Kelly saver sub, 4-3/4" OD X 2-13/16" ID 3-1/2" IF PIN X BOX
- One (1) Hexagonal Kelly, 5-1/4" X 37'
- One (1) Hexagonal Kelly, 4-1/4" X 37'
- One (1) KV800 Upper Kelly Cook Omsco Flapper Type 8" OD X 3" ID 6-5/8" REG LH
- One (1) Packard Upper Kelly Valve 7-3/4" OD X 3-1/16" ID 6-5/8" REG LH
- One (1) Upper Kelly Valve, Canister Guard One-Piece, 8" OD X 2-3/4" ID 6-5/8" REG LH
- Two (2) Lower Kelly valve, 5-1/4" OD X 2" ID
- Two (2) Lower Kelly valve, 6-3/4" OD X 3" ID

10.6. DRILL STRING PRESSURE CONTROL TOOL:

- Two (2) Circulating head 4-1/2" IF & 3-1/2" IF X 2"
- One (1) Drop In Check Valve, 2-11/16" OD X 1-3/8" ID, With Landing Sub 4-1/2" IF
- One (1) Drop In Check Valve, 2-3/16" OD X 7/8" ID, With Landing Sub 3-1/2" IF
- Two (2) Model "GA" Float Valve Size 2F-3R
- Two (2) Model "GA" Float Valve Size 4R
- Two (2) Model "GA" Float Valve Size 5F-6R

10.7. MISCELLANEOUS:

- One (1) Bit breaker, 17-1/2"
- One (1) Bit breaker, 12-1/4"
- One (1) Bit breaker, 8-1/2"
- One (1) Bit breaker, 6"
- Two (2) Tester Cup, 7", 17-26 lb/ft
- Two (2) Tester Cup, 7", 29-38 lb/ft
- Two (2) Tester Cup, 9-5/8" 32.3-40 lb/ft
- Two (2) Tester Cup, 9-5/8" 43.5-53.5 lb/ft

Two (2) Tester Cup, 13-3/8" 68-72 lb/ft
Two (2) Tester Cup, 13-3/8" 48-61 lb/ft
One (1) Kelly Kan Mud saver bucket with seals for 2-7/8", 3-1/2", 4-1/2".

11. OTHER EQUIPMENT

One (1) Master Bushing, EMSCO Style, Split-Pin Type, Type MSP/MDSP
One (1) Master Bushing MSPC EMSCO Style 27-1/2" Solid Pin Drive
One (1) API # 3, Insert Bowl, 8-5/8" And Smaller
One (1) API # 2, Insert Bowl, 9-5/8" - 10-3/4"
One (1) API # 1, Insert Bowl, 11-3/4 - 13-3/8"
One (1) MK Kelly Bushing, Hex Model 27HDP With 5-1/4" Hex Rollers
One (1) MK Kelly Bushing, Hex Model 27HDP With 4-1/4" Hex Rollers
One (1) Baash-Ross Size 13-3/8" 200-Ton Bowl, Hinged casing spider

11.1. TEST& MEASUREMENTS UNITS

(1) Buxton Interests, Test Unit T10G-M Air operated, self contained portable high pressure unit with SSR15 Skid Mounted Chart Recorder.
(1) Diverter Pressure Test Stump 21-1/4" x 2000psi
(1) DSV Valve Test Stand with NC-50 Saver Sub
(1) TOTCO Deviation Tool Assy. System
(1) Mathey Style Wireline Unit 25,000 Ft., 092" Line, 3 Speed Transmissions 15 HP Ex. Proof Motor and Ex. Proof Starter Box.

12. GENERATOR HOUSE

One (1) generator house with:



Two (2) news generator set CAT 3412 TTA, 60 Hz, rated 773 HP @ 1500 rpm.
One (1) Electrical switchboard by SIEMENS composed for:
1 General Switch of 3 Poles, 480v Ca to 50/60 Hz

1 Circuit Breaker of 3 Poles 480v Ca to 50/60 Hz
1 Circuit Breaker of 4 Poles (3F + N) 220v/115v CA to 50/60 Hz
All as Norms IEC- 60947-1 And IEC - 60947-3
One (1) Three-Phase Transformer 125KVA 480-230V
One panel with 112 plugs and sockets for rig electrical service.



13. COMPRESSOR HOUSE

Two (2) Air Compressor Ingersoll Rand, Model MH37 (HPE50), capacity 5, 6 m³/min. @ 10 bar, 460V/3F/60Hz.
One (1) Hankinson Air Dryer Model HPRD-750 @ 750 CFM.
Two (2) Receiver Tank EDV-2000, 400 gallons capacity, 200 psig with Pressure Safety Valve, Pressure Gauge.

14. FUEL TANK

8,000 gallon diesel fuel tank equipped with one (1) MCM centrifugal pump 2x3 driven by 5 HP electrical motor, start / stop switches, Fuel transfer pump DAB, MODEL KPA 40/20 T and diesel fuel filtration system.



15. WATER TANK

One (1) Water tank 190bbl capacity, equipped with two (2) MCM 250 centrifugal pumps, 3x4x13 driven by 25 HP electrical motor for water transfer.

One (1) fire pump EBARA AFC-ENR 40-200/15 DJ, SERIE AQUAFIRE with one centrifugal pump driven by a 13.6 kW Diesel Engine and one auxiliary jockey pump CVM A/15, driven by electrical motor of 1,1 kW.



16. ELECTRICAL RIG-UP

Equipment selection and classification of areas will be in accordance with current API

Standard North American Electrical Codes.

The distribution panel includes breakers for mast lighting, utility outlets, engine enclosure lighting, and connection to a 30A 4P 4W receptacle.

The lighting wiring are in rigid conduit with flexible terminations in liquid tight flex or rough service cord. The connection of mast lights are with RL 80 cord connectors. Eleven (11) 4 ft explosion proof fluorescent mast lights.

One (1) Red incandescent crown Light.

Three (3) extra light receptacles mounted at base of mast (lower section).

17. CABINS

(16) Cabins completely equipped

ITEM	CABIN TYPE	ALLOCATION	UNITS	SN
1	2 OFFICES	CO.MAN – GEOLOGIST OFFICE	1	RS 006002
2	2 MAN SLEEPER UNIT	DAY CO.MAN /NIGHT CO.MAN ROOM	1	RS 006046
3	2 MAN SLEEPER UNIT	DAY GEOLOGIST/NIGHT GEOLOGIST ROOM	1	RS 006017
4	2 MAN SLEEPER UNIT	DAY TOOL PUSHER/NIGHT TOOL PUSHER ROOM	1	RS 006049
5	2 MAN SLEEPER UNIT	HSE/MECHANIC ROOM	1	RS 006043
6	2 MAN SLEEPER UNIT	DRILLERS ROOM	1	RS 006041
7	2 MAN SLEEPER UNIT	DRILLING ENG/SONDAGENS ENG ROOM	1	RS 006049
8	KITCHEN		1	RS 006093
9	16 SEAT DINNER UNIT – JOIN WITH KITCHEN		1	RS 006030
10	4 MAN SLEEPER UNIT	4 ROOMS	1	RS 006073
11	4 MAN SLEEPER UNIT	4 ROOMS	1	RS 006031
12	RECREATION UNIT	RECREATION/MEETING	1	RS 006088
13	TOOL PUSHER/ MECHANIC/SAFETY COORDINATOR OFFICE	OFFICE	1	CYLU 420325/4
14	10 SEAT DINNER UNIT/ DRESSING ROOM		1	SP 135610
15	MEDICAL FACILITY	MEDICAL FACILITY /NURSE ROOM	1	RS 006091
16	TELECOMUNICATION		1	RS 006001

17.1. ELECTRICAL GENERATORS

(1) Electrical generator GESAN DPS-100 KVAS, Perkins engine Model 2436/1500

(1) Electrical generator GESAN DPS-100 KVAS, Perkins engine Model 1984/1800

(1) Electrical panel for cabins

17.2. SEPTIC PIT

8000L Septic pit for camp

1000L Accumulator septic pit for camp

18. MOBILE FLEET –FORKLIFT, TRUCKS, CARS, CRANE, CISTERN

(1) FORKLIFT CAT 950H, 4X4 12 Tones capacity.



IVECO TRUCK'S:

(1) IVECO Truck 12x8, 50 tons



(1) IVECO Truck 8x8



(1) IVECO Tractor head



(1) Mobile Crane LIEBHERR LTM 1080/1 - 80 tons



(1) Fuel cistern 12000L capacity.



(1) Water cistern 30000L capacity.



(1) Trailer 40ft x 30 tons



- (2) Toyota Land Cruiser – 8 places
- (1) Toyota land Cruiser Ambulance full equipped
- (2) Toyota Hylux – 4 places, pick-up



19. TOP DRIVE DRILLMEC HTD 250

Nominal hoist rating 2,500 kN (560,000 lbs) static

API bearing rating 2,316 kN (520,000 lbs)

Rated output torque

Working:

34,000 N·m (25,000 lbs·ft) @ 85 RPM

Screwing:

36,000 N·m (26,500 lbs·ft)

28,600 N·m (21,000 lbs·ft) – Stall torque

Unscrewing:

73,700 N·m (54,300 lbs·ft)

62,100 N·m (45,800 lbs·ft) – Stall torque

Maximum speed

189 RPM

Brake capacity 37,660 N·m (27,770 lbs·ft)

Back-up wrench tubular size (diameter) 6_”

4” to 8” alternative die blocks

Bore 76.2 mm (3”)

Rated circulating pressure 5,000 psi – 35 MPa

Pipe handler rotation Continuous (Lockable in 12 positions)

Hydraulic system requirement 868 liters – 35 MPa

Auxiliary hydraulic system 225 liters – 55 MPa

HTD250 TOP DRIVE PERFORMANCE

