
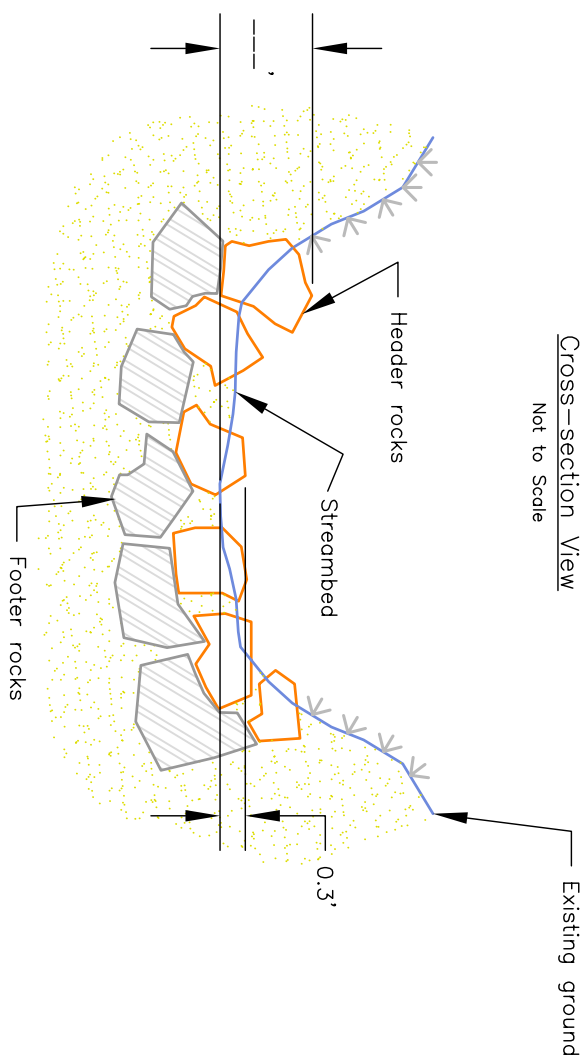


Engineers Notes:

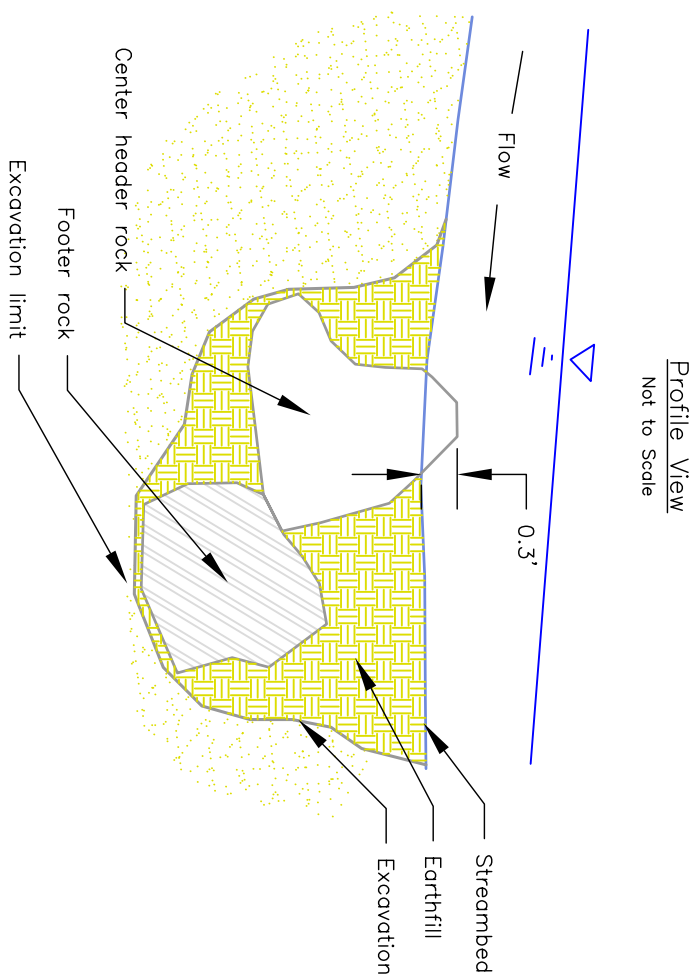

Construction Notes:

1. Riprap shall be sized such that the least dimension is not less than $2/3$ of the greatest dimension.
2. Rock shall be angular in shape and free of dirt, clay, sand, rock fines, and other undesirable materials.
3. Small rocks shall not be grouped as a substitute for a larger rock.
4. Header rocks shall be placed so as to interlock with the footer rocks and shall be firmly in contact with the footer rocks.