

Introduction


Dear customers, partners and agents,
As mentioned in the first issue, this Newsletter 2-2026 focuses on our conditioning spiral.

TCS – Trikno Conditioning Spiral



Product Highlights

Our spiral can be used either for product cooling or for mould pre-heating. The minimum dimensions of the isolation house are:

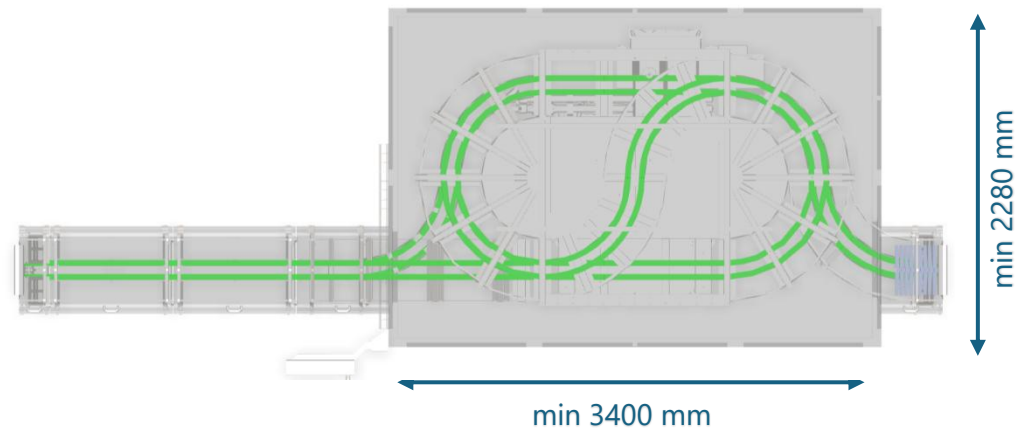

Advantages of the Trikno Conditioning Spiral:

- ✓ Air flow through the product from both sides --> **homogeneous and efficient conditioning**
- ✓ Compact design and > **small footprint**
- ✓ Continuous mould movement without mechanical sliders --> **no mould jamming**
- ✓ Suitable for transporting different shapes --> **flexible use**

Updates & Roadmap

Until today, each spiral was a customer-specific one-off production. This remains the case, but with the difference that the cooling system can be configured faster and easier by selecting predefined components.

The shape sizes result in predefined curve variants and thus also the length and width of the isolation house. Trikno has three different size variants to choose:

Variant	Isolation house dimensions	Mould dimensions
	min.	max.
1	2280 x 3400 mm	275 x 350 mm
2	2780 x 4150 mm	500 x 600 mm
3	3430 x 5300 mm	650 x 700 mm

The insulated houses can be made of different materials: PVC, glass, aluminium, Makrolon or stainless steel. In the two transparent variants glass and Makrolon, LED lighting in red or blue can optionally illuminate the interior.

Further information can be found on the technical data sheet of our homepage:

[TCS Spiral Technical DataSheet EN.pdf](#)

In the next issue, we will inform you about the exhibited machines at Interpack 2026.

Your opinion is important!

To ensure that this newsletter is as useful as possible for you, I look forward to your feedback:

- What topics would you like to see?
- What products should we introduce next?
- What challenges are you experiencing in your market?

Thank you for your trust!

